

## ODSL 30 Ex

## Optical laser distance sensors


en 2022/02/23 50122342-02



0.2 ... 30 m

- Reflection-independent distance information
- High accuracy through referencing
- Analog current and voltage output
- 1 teachable analogue and switching output
- Configuration via LC display and key pad (the sensor must be removed from the Ex housing for this purpose)
- EC type examination EPS 14 ATEX 1 696
- Ex II 2G Ex db IIA T3 Gb
- Ex II 2D Ex tb IIIC T80°C Db
- Cable 15 m, 8-wire

### Dimensioned drawing

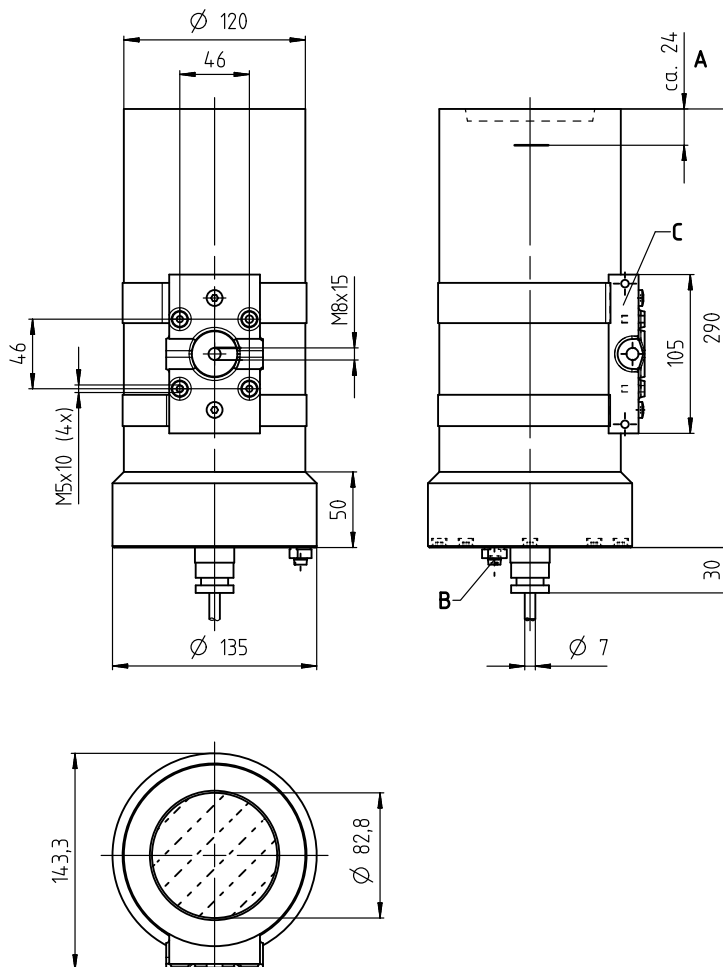

- A** Reference edge for the measurement (distance zero point)  
**B** Earthing  
**C** Mounting base

### Electrical connection

18–30V DC +	ws/WH
activ/reference	br/BN
GND	gn/GN
Q1 ● ○ ⊗	ge/YE
teach Q1	gr/GY
4–20mA	rs/PK
1–10V	bl/BU
AGND	rt/RD

### Accessories:

(available separately)

- Cooperative target CTS 100x100 (diffuse reflectance 50 ... 90 %)

We reserve the right to make changes • PAL\_ODSL30V30MExd\_en\_50122342-02.fm

### Technical data

#### Optical data

Measurement range <sup>1)</sup>	0.2 ... 30 m (18 ... 90 % diffuse reflection)
Resolution <sup>2)</sup>	0.2 ... 20 m (6 ... 90 % diffuse reflection)
Light source	0.1 mm/1 mm (factory setting)
Laser class	Laser
Wavelength	2 acc. to IEC 60825-1:2014
Max. output power	655 nm
Mean power	4.5 mW
Impulse duration and modulation frequencies	< 1 mW
	290 ns at 0.9 MHz
	73 ns at 3.4 MHz
	18 ns at 13.7 MHz
	1.6 ns at 315 MHz
Light spot	Collimated, $\varnothing$ 6mm at 10 m

#### Error limits for current output, relative to measurement range end value <sup>3)</sup>

Accuracy <sup>1)</sup>	Measurement range up to 2.5 m: ± 2% without referencing, ± 1% with referencing
	Measurement range 2.5 m up to 5 m: ± 1.5% without referencing, ± 1% with referencing
	Measurement range 5 m up to 30 m: ± 1% without referencing, ± 1% with referencing
Reproducibility <sup>4)</sup>	± 0.5% of measurement value
Systematic measurement error	6mm (owing to glass pane)
Temperature drift	Typ. 0.5mm/°C (without referencing)

#### Time behavior

Measurement time <sup>5)</sup>	30 ... 100ms (factory setting: 100 ms)
Readiness delay	≤ 1 s

#### Electrical data

Operating voltage $U_B$	18 ... 30 V DC (incl. residual ripple)
Residual ripple	≤ 15 % of $U_B$
Power consumption	≤ 4 W
Switching output	PNP transistor, high active (default), NPN transistor or push-pull through configuration
Signal voltage high/low	≥ ( $U_B - 2 V$ ) / ≤ 2 V
Analog output	$R_L \geq 2 k\Omega$ (voltage) $R_L \leq 500 \Omega$ (current)

#### Indicators

Green LED	Continuous light	Ready
	Off	No voltage
Yellow LED	Continuous light	Object within teach-in measurement distance
	Off	Object outside the teach-in measurement distance


#### Mechanical data

Housing	Metal
Optics cover	Glass
Weight	Approx. 6500 g
Connection type	Cable 15m, 8-wire

#### Environmental data

Ambient temp. (operation/storage)	-10 °C ... +45 °C / -40 °C ... +70 °C
Protective circuit <sup>6)</sup>	2, 3
VDE protection class <sup>7)</sup>	II, all-insulated
Degree of protection	IP 65
Standards applied	IEC 60947-5-2

- 1) Temperature range 0 °C ... +45 °C
- 2) Display and output resolution 0.1 mm configurable
- 3) In temperature range from 0 °C ... +45 °C, measurement object  $\geq 50 \times 50 \text{ mm}^2$ , with factory settings; different error limits apply at temperatures < 0 °C
- 4) Same object, identical environmental conditions
- 5) Configurable, depends on the object diffuse reflectance and on the max. detection range
- 6) 2=polarity reversal protection, 3=short circuit protection for all outputs
- 7) Rating voltage 250 V AC

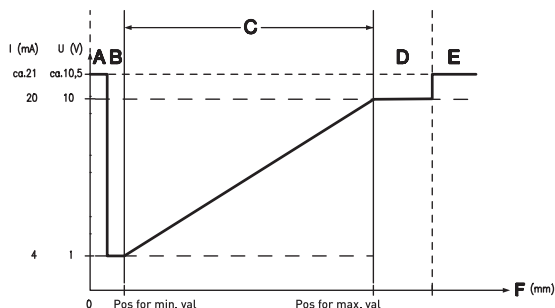

- A Short range (no signal)
- B Object present
- C Measurement range
- D Object present
- E No object present (no signal)
- F Measurement distance

### Notes

- **Analog output:**  
The analog output is factory-set to 200 to 5000mm with calibrated current output. To adapt the configuration, the sensor must be removed from the Ex housing.
- **Teaching procedure (factory setting):**  
Position the measurement object at the desired measurement distance. Apply + $U_B$  to the teach input. Take teach input back to GND, switching output has now been taught. Edge on line teach Q1 teaches output Q1. During the teaching of Q1, yellow LED Q1 will flash.
- **Activation/referencing input:**  
Referencing is carried out by applying the voltage (for a duration of about 300ms). If this process is activated before the measurement, the highest possible accuracy is achieved.

#### Observe intended use!

- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with its intended use.

### Order guide

	Designation	Part no.
With connection cable 15m, 8-wire	ODSL 30/V-30M Ex d	50122319

### Notices for the safe use of sensors in potentially explosive areas

#### Intended application range

The distance sensors of the ODSL 30 Ex d series contactlessly detect objects located in the light beam or that move through the light beam and measure the distance to these objects.

#### Validity

The sensors have a housing that features pressure-proof encapsulation and can be used in these areas with these classifications:

Device group	Device category	Equipment protection level	Zone
II	2G	Gb	Zone 1
II	2D	Db	Zone 21

#### ATTENTION!



- ↪ Check whether the equipment classification corresponds to the requirements of the application.
- ↪ The devices are not suited for the protection of persons and may not be used for emergency shutdown purposes.
- ↪ A safe operation is only possible if the equipment is used properly and for its intended purpose.
- ↪ Electrical equipment may endanger humans and (where applicable) animal health, and may threaten the safety of goods if used incorrectly or under unfavorable conditions in potentially explosive areas.
- ↪ The applicable national regulations (e.g. EN 60079-14) for the configuration and installation of explosion-proof systems must be observed without fail

#### Installation, commissioning

#### ATTENTION!



- ↪ Electrical equipment may endanger humans and (where applicable) animal health, and may threaten the safety of goods if used incorrectly and under unfavorable conditions in potentially explosive areas.
- ↪ A safe operation in potentially explosive areas is only possible if the equipment is used properly and for its intended purpose.
- ↪ The distance sensors of the ODSL 30 Ex d model must only be installed and maintained by trained electricians.
- ↪ When installing the sensors in Ex zones 1 and 21, the connection cable must be connected in a connection space with increased safety Ex e, or outside the Ex area.
- ↪ The housing must be connected at the marked external connection unit to the protective conductor system.
- ↪ The respective applicable national regulations for the installation of electrical equipment in potentially explosive areas must be observed.

#### Maintenance

No changes may be made to the devices of the ODSL 30 Ex d model for potentially explosive areas.

Repairs to the sensors may only be performed by persons trained for such work or by the manufacturer. Defective devices must be replaced immediately.

The housing must not be opened while the power is on! After switching off power, wait at least 10 min. before opening the housing.

Cyclical maintenance of the sensors is not necessary.

Depending on the environmental conditions, it may occasionally be necessary to clean the light-emission surfaces of the sensors. This cleaning must only be performed by persons trained for performing this task. A soft, damp cloth should be used for this purpose. Cleaning agents that contain solvents must not be used.

#### Chemical resistance

The sensors of the ODSL 30 Ex d model demonstrate good resistance against many diluted acids and bases.

Exposure to organic solvents is possible only under certain circumstances and only for short periods of time.

Resistance to chemicals should be examined on a case by case basis.

### Laser safety notices

#### ⚠ ATTENTION, LASER RADIATION – CLASS 2 LASER PRODUCT



#### Do not stare into beam

The device satisfies the requirements of IEC/EN 60825-1:2014 safety regulations for a product of **laser class 2** and complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019.

- ↪ Never look directly into the laser beam or in the direction of reflected laser beams!  
If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- ↪ Do not point the laser beam of the device at persons!
- ↪ Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- ↪ When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- ↪ CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.
- ↪ Observe the applicable statutory and local laser protection regulations.
- ↪ The device must not be tampered with and must not be changed in any way.  
There are no user-serviceable parts inside the device.  
Repairs must only be performed by Leuze electronic GmbH + Co. KG.
- ↪ The laser radiation emitted from the device is collimated. The laser is operated at various modulation frequencies. For light spot size, pulse power, pulse duration, modulation frequencies and wavelength, see Technical data.

#### NOTE



#### Affix laser information and warning signs!

Laser warning and laser information signs are affixed to the device (see ①). In addition, self-adhesive laser warning and information signs (stick-on labels) are supplied in several languages (see ②).

- ↪ Affix the laser information sheet to the device in the language appropriate for the place of use.  
When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" notice.
- ↪ Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.  
Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

①



- A Laser aperture
- B Laser warning sign
- C Laser information sign with laser parameters

②

50101929-05

<p>LASERSTRAHLUNG NICHT IN DEN STRAHL BLICKEN</p> <p>Max. Leistung (peak): 4,5 mW Impulsdauer: 290 ns Wellenlänge: 655 nm</p> <p>LASER KLASSE 2 EN 60825-1:2014</p>	<p>RADIAZIONE LASER NON FISSARE IL FASCIO</p> <p>Potenza max. (peak): 4,5 mW Durata dell'impulso: 290 ns Lunghezza d'onda: 655 nm</p> <p>APPARECCHIO LASER DI CLASSE 2 EN 60825-1:2014</p>
<p>LASER RADIATION DO NOT STARE INTO BEAM</p> <p>Maximum Output (peak): 4,5 mW Pulse duration: 290 ns Wavelength: 655 nm</p> <p>CLASS 2 LASER PRODUCT EN 60825-1:2014</p>	<p>RAYONNEMENT LASER NE PAS REGARDER DANS LE FAISCEAU</p> <p>Puissance max. (crête): 4,5 mW Durée d'impulsion: 290 ns Longueur d'onde: 655 nm</p> <p>APPAREIL À LASER DE CLASSE 2 EN 60825-1:2014</p>
<p>RADIACION LASER NO MIRAR FUJANTE AL HAZ</p> <p>Potencia máx. (peak): 4,5 mW Duración del impulso: 290 ns Longitud de onda: 655 nm</p> <p>PRODUCTO LASER DE CLASE 2 EN 60825-1:2014</p>	<p>RADIAÇÃO LASER NÃO OLHAR FIXAMENTE O FEIXE</p> <p>Potência máx. (peak): 4,5 mW Período de pulso: 290 ns Comprimento de onda: 655 nm</p> <p>EQUIPAMENTO LASER CLASSE 2 EN 60825-1:2014</p>
<p>LASER RADIATION DO NOT STARE INTO BEAM</p> <p>Maximum Output (peak): 4,5 mW Pulse duration: 290 ns Wavelength: 655 nm</p> <p>CLASS 2 LASER PRODUCT IEC 60825-1:2014 Complies with 21 CFR 1040.10</p>	<p>激光辐射 勿直视光束</p> <p>最大输出 (峰值): 4,5 mW 脉冲持续时间: 290 ns 波长: 655 nm</p> <p>2 类激光产品 IEC 60825-1:2014</p>



EU Konformitätserklärung  
 EU Declaration of Conformity  
 Déclaration UE de conformité  
 N° 01-6100-7C0003\_C

# BARTEC

Wir	We	Nous
<b>BARTEC GmbH</b> Max-Eyth-Straße 16 97980 Bad Mergentheim Germany		
erklären in alleiniger Verantwortung, dass das Produkt	declare under our sole responsibility that the product	attestons sous notre seule responsabilité que le produit
<b>Kleinst- / Steuer, Regel- und Anzeigergerät</b>	<b>Miniature / Control and Display Unit</b>	<b>Miniature commande, de régulation et d'attache</b>

**Type 07-61\*\*-\*\*\*\*/\*\*\*\* and type 07-662\*-\*\*\*\*/\*\*\*\***

auf das sich diese Erklärung bezieht den Anforderungen der folgenden Richtlinien (RL) entspricht	to which this declaration relates is in accordance with the provision of the following directives (D)	se référant à cette attestation correspond aux dispositions des directives (D) suivantes
<b>ATEX-Richtlinie 2014/34/EU</b>	<b>ATEX-Directive 2014/34/EU</b>	<b>Directive ATEX 2014/34/UE</b>
<b>EMV-Richtlinie 2014/30/EU</b>	<b>EMC-Directive 2014/30/EU</b>	<b>Directive CEM 2014/30/UE</b>
<b>RoHS-Richtlinie 2011/65/EU</b>	<b>RoHS-Directive 2011/65/EU</b>	<b>Directive RoHS 2011/65/UE</b>
und mit folgenden Normen oder normativen Dokumenten übereinstimmt	and is in conformity with the following standards or other normative documents	et est conforme aux normes ou documents normatifs ci-dessous

<b>EN IEC 60079-0:2018</b>	<b>EN 60079-28:2015</b>
<b>EN 60079-1:2014</b>	<b>EN 60079-31:2014</b>
<b>EN IEC 60079-7:2015/A1 :2018</b>	<b>EN 60529:1991</b>
<b>EN 60079-11:2012</b>	<b>+ A1:2000 + A2:2013</b>

Eine Übereinstimmung mit den aufgeführten Normen ist variabel und abhängig von den eingebauten Komponenten.	A conformity with the listed standards is variable and depends on the installed components.	La conformité aux normes citées est variable et dépend des composants installés.
---	---	--

Verfahren der EU-Baumusterprüfung / Benannte Stelle	Procedure of EU-Type Examination / Notified Body	Procédure d'examen UE de type / Organisme Notifié
---	--	---

**EPS 14 ATEX 1 696 X**

2004, Bureau Veritas CPS Germany GmbH, Businesspark A96, 86842 Türkheim

**CE 0044**

Bad Mergentheim, 05.07.2021

  
 Sebastian Werner

Team Leader –  
 Engineering to Order

  
 Jan Kirschner

Head of Global  
 Product Management