

Technical data sheet Light curtain receiver Part no.: 50119831 CML720i-R05-2880.A/CV-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2024-06-21

Technical data

Basic data

Basic data	
Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Object measurement
Special version	
Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
Optical data	, i i i i i i i i i i i i i i i i i i i
Operating range	0.1 3.5 m
Operating range	Guaranteed operating range
Operating range limit	0.1 4.5 m
Operating range limit	Typical operating range
Measurement field length	2.880 mm
Number of beams	576 Piece(s)
Beam spacing	5 mm
Measurement data	
Minimum object diameter	10 mm
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U _B	18 30 V, DC
Residual ripple	0 15 %, From U _B
Residual ripple Open-circuit current	 0 15 %, From U_B 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Open-circuit current	0 600 mA, The specified values refer to the entire package consisting of trans-
Open-circuit current Outputs	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Open-circuit current	0 600 mA, The specified values refer to the entire package consisting of trans-
Open-circuit current Outputs Number of analog outputs	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Open-circuit current Outputs	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Open-circuit current Outputs Number of analog outputs Analog outputs	 0 600 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s)
Open-circuit current Outputs Number of analog outputs Analog outputs Type	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max.	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance	 0 600 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	 0 600 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω e 2 Piece(s)
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectablI Type	 Common and the specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output Common 24 mA Common 24 mA
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectablI Type Voltage type, outputs	 Common and the specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output Common 24 mA Common 24 mA
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectabl Type Voltage type, outputs Switching voltage, outputs	 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Voltage Current 100 mA 6,000 Ω e 2 Piece(s) Inputs/outputs selectable DC Typ. U_B / 0 V
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectabl Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	 Current Current 100 mA Piece(s)
Open-circuit current Outputs Number of analog outputs Type Current Voltage Analog output 1 Type Current Voltage Analog output 2 Type Inputs/outputs selectable Output resistance Number of inputs/outputs selectabl Type Voltage type, outputs Switching voltage, outputs	 0 600 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω e 2 Piece(s) Inputs/outputs selectable DC Typ. U_B / 0 V

	put/output 1	1
Ac	ctivation/disable delay	1 ms
Time b	ehavior	
Readin	ess delay	450 ms
Cycle ti	ime	17.68 ms
Respor	nse time per beam	30 µs
Servic	e interface	
Туре		IO-Link
IO-L	ink	
Fund		Configuration via software
		Service
Conne	ction	
Numbe	r of connections	2 Piece(s)
Plug ou	ıtlet	Axial
•		
Con Fund	nection 1	Configuration interface
Func	.0011	
		Signal IN
		Signal OUT
T		Voltage supply
	of connection	Connector
	ad size	M12
Туре		Male
Mate	rial	Metal
No. c	of pins	8 -pin
Enco	oding	A-coded
Con	nection 2	
Func		Connection to transmitter
	of connection	Connector
	ad size	M12
Туре		Female
Mate		Metal
	of pins	5 -pin
Enco	oding	A-coded
Mecha	nical data	
Design		Cubic
Dimens	sion (W x H x L)	29 mm x 35.4 mm x 2,955 mm
Housin	g material	Metal
Metal h	ousing	Aluminum
Lens co	over material	Plastic
Net wei	ght	2,900 g
Housin	g color	Silver
Type of	fastening	Groove mounting
		Via optional mounting device
Opera	tion and display	
Type of	display	LED
		OLED display
Numbe	r of LEDs	2 Piece(s)
	configuration	Software
Type of		
Type of	-	Teach-in

Leuze

Technical data

Leuze

Environmental data

Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C
Certifications	


Degree of protection	IP 65	
Protection class	III	
Certifications	c UL US	
Standards applied	IEC 60947-5-2	

Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549

Dimensioned drawings

All dimensions in millimeters

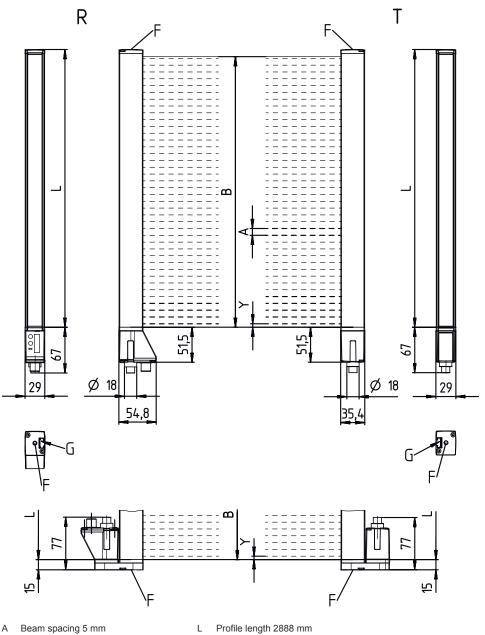

- Beam spacing 5 mm А
- В Measurement field length 2880 mm
- F M6 thread G Fastening groove
- Transmitter R Receiver

Т


2.5 mm Υ

We reserve the right to make technical Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com changes
 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2024-06-21

Leuze

Dimensioned drawings



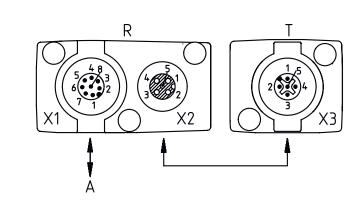

A PWR / SW IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	OUT V		
7	OUT mA		
8	AGND		




Connection 2

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



Operation and displav

LED 1

2

curtain receiver • Part no.: 50119831 • CML720i-R05-2880.A/CV-M12		
erati	on and display	Leuze
	Display	Meaning
	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

 Part no.	Designation	Article	Description
50119403	CML720i-T05- 2880.A-M12	Light curtain transmitter	Operating range: 0.1 3.5 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series 720i: 720i series 730i: 730i series
Y	Device type T: transmitter R: receiver
ZZ	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note	
A list wi	th all available device types can be found on the Leuze website at www.leuze.com.

Notes

Observe intended use!

This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ Only use the product in accordance with its intended use.

	For UL applications:
A	 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code). These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Leuze

Accessories

Leuze

Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

	Part no.	Designation	Article	Description
ц.	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
A	s A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.