

Technical data sheet Light curtain receiver Part no.: 50119813 CML720i-R05-1440.A/CV-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2024-06-21

1/8

Technical data

Basic data

Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Object measurement
Special version	
Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
Optical data	
Operating range	0.1 3.5 m
	Guaranteed operating range
	0.1 4.5 m
	Typical operating range
	1,440 mm
	288 Piece(s)
	5 mm
Measurement data	
Minimum object diameter	10 mm
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U _B	18 30 V, DC
Residual ripple	0 15 %, From U _B
	0 350 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Outputs	
Outputs Number of analog outputs	2 Piece(s)
Number of analog outputs Analog outputs	2 Piece(s)
Number of analog outputs Analog outputs Type	2 Piece(s) Analog output
Number of analog outputs Analog outputs Type Current	2 Piece(s) Analog output 0 24 mA
Number of analog outputs Analog outputs Type Current	2 Piece(s) Analog output
Number of analog outputs Analog outputs Type Current Voltage	2 Piece(s) Analog output 0 24 mA
Number of analog outputs Analog outputs Type Current Voltage Analog output 1	2 Piece(s) Analog output 0 24 mA
Number of analog outputs Analog outputs Type Current Voltage Analog output 1	2 Piece(s) Analog output 0 24 mA 0 11 V
Number of analog outputs Analog outputs Type Current Voltage Analog output 1	2 Piece(s) Analog output 0 24 mA 0 11 V
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2	2 Piece(s) Analog output 0 24 mA 0 11 V
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max.	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s)
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	2 Piece(s) Analog output 0 24 mA 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC
Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Switching voltage, inputs Switching voltage, inputs	2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V

Activation/disable delay 1 ms Time behavior 1 ms Readiness delay 450 ms Cycle time 9.04 ms Response time per beam 30 µs Service interface 10-Link Type IO-Link Function Configuration via Service Connection Service Number of connections 2 Piece(s) Plug outlet Axial Connection 1 Signal IN Function Configuration into Signal IN Signal OUT Voltage supply Type of connection Connector Thread size M12 Type Male Material Metal No. of pins 8 -pin Encoding A-coded Type of connection Connector Thread size M12 Type of connection Connector Thread size M12	software
Readiness delay 450 ms Cycle time 9.04 ms Response time per beam 30 μs Service interface IO-Link ID-Link IO-Link Function Configuration via Service Connection 2 Piece(s) Plug outlet Axial Connection 1 Configuration interstruct Function Configuration interstruct Signal OUT Voltage supply Voltage supply Ype of connection Type of connection Connector Function Connector Type of connection Connector Type of connection Connector Type of connection Connector Function Connector Type of connection Connector Function Connector	software
Cycle time 9.04 ms Response time per beam 30 μs Service interface IO-Link Type IO-Link Function Configuration via Service Connection 2 Piece(s) Plug outlet Axial Connection 1 Configuration via Signal IN Function Configuration via Signal OUT Voltage supply Voltage supply Type of connection Connector Function Connector Type of connection Connector Type of connection Connector Function Connector Type of connection	software
Response time per beam 30 μs Service interface IO-Link Type IO-Link Function Configuration via Service Connection 2 Piece(s) Plug outlet Axial Connection 1 Configuration int Signal IN Function Configuration int Signal OUT Voltage supply Voltage supply Type of connection Connector Function Connector Type of connection Connector Type<	software
Service interface Type IO-Link IO-Link Function Configuration via Service Connection Number of connections 2 Piece(s) Plug outlet Axial Connection 1 Function Configuration int Signal IN Signal OUT Voltage supply Type of connection Connector Thread size M12 Type Male Material Metal No. of pins 8 -pin Encoding A-coded Connector Thread size M12 Type Female Material Metal No. of pins 5 -pin Encoding A-coded	software
Type IO-Link IO-Link Configuration via Service Function Configuration via Service Connection 2 Piece(s) Plug outlet Axial Connection 1 Configuration intervise Function Configuration intervise Function Configuration intervise Function Configuration intervise Function Configuration intervise Signal OUT Voltage supply Type of connection Connector Thread size M12 Type Male Material Metal No. of pins 8 -pin Encoding Connector Thread size M12 Type of connection Connector Type Female Material Metal No. of pins	software
IO-LinkConfiguration via ServiceFunctionConfiguration via ServiceNumber of connections2 Piece(s)Plug outletAxialConnection 1Configuration int Signal NFunctionConfiguration int Signal OUT Voltage supplyType of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingConnection to traType of connectionConnection to traType of connectionConnection to traNo. of pins8 -pinEncodingConnection to traType of connectionConnection to traType of connectionConnection to traType of connectionConnectorType of connectionConnectorType of connectionConnectorType of connectionConnectorType femaleMaterialMaterialMetalNo. of pins5 -pinEncodingA-coded	software
FunctionConfiguration via ServiceConnection2 Piece(s)Plug outletAxialConnection 1AxialFunctionConfiguration integration integration integrationFunctionConfiguration integrationFunctionConfiguration integrationType of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingConnectorType of connectionConnection to traType of connectionConnectorTypeMaleMaterialMetalNo. of pins8 -pinEncodingConnection to traType of connectionConnectorThread sizeM12Type of connectionConnectorType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	software
FunctionConfiguration via ServiceConnection2 Piece(s)Plug outletAxialConnection 1AxialFunctionConfiguration integration integration integrationFunctionConfiguration integrationFunctionConfiguration integrationType of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingConnectorType of connectionConnection to traType of connectionConnectorTypeMaleMaterialMetalNo. of pins8 -pinEncodingConnection to traType of connectionConnectorThread sizeM12Type of connectionConnectorType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	software
Connection2 Piece(s)Plug outletAxialConnection 1Configuration integration integrati	
Number of connections2 Piece(s)Plug outletAxialConnection 1Configuration interstructureFunctionConfiguration interstructureSignal OUTVoltage supplyType of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingA-codedConnection 2Encotion to tractionType of connectionConnectorType of connectionConnectorType of connectionConnection to traction to tractionType of connectionConnectorType of connectionConnectorType of connectionConnectorType of connectionConnectorType of connectionConnectorTypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
Plug outlet Axial Connection 1 Configuration interview Function Configuration interview Signal IN Signal OUT Voltage supply Voltage supply Type of connection Connector Thread size M12 Type Male Material Metal No. of pins 8 -pin Encoding A-coded Connector 1 Connector Type of connection Connector Type Male Material Metal No. of pins 8 -pin Encoding Connector Type of connection Connector Type of connection Connector Type Female Material Metal No. of pins 5 -pin Encoding A-coded	
Connection 1 Function Configuration intersity Signal IN Signal OUT Voltage supply Voltage supply Type of connection Connector Thread size M12 Type Male Material Metal No. of pins 8 -pin Encoding A-coded Connection 2 Function Function Connector Type of connection Connector Type of connection Connector Type of connection Connector Type of connection Connector Thread size M12 Type Female Material Metal No. of pins 5 -pin Encoding A-coded	
FunctionConfiguration interstityFunctionSignal IN Signal OUT Voltage supplyType of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingA-codedConnector 1ConnectorType of connectionConnectorType of connectionConnectorType of connectionConnectorThread sizeM12Type of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
FunctionConfiguration interstityFunctionSignal IN Signal OUT Voltage supplyType of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingA-codedConnector 1ConnectorType of connectionConnectorType of connectionConnectorType of connectionConnectorThread sizeM12Type of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
Signal IN Signal OUT Voltage supply Type of connection Connector Thread size Male Material No. of pins B -pin Encoding A-coded Connection 2 Function Connector Type of connection Connector Type of connection Connector Type of connection Connector Material Metal No. of pins Encoding Material Metal No. of pins 5 -pin Encoding A-coded	
Signal OUTVoltage supplyType of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingA-codedConnection 2FunctionFunctionConnectorType of connectionConnectorThread sizeM12Type of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	erface
Voltage supplyType of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingA-codedConnection 2FunctionFunctionConnector threadType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
Type of connectionConnectorThread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingA-codedConnection 2Enconnection to tractionType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
Thread sizeM12TypeMaleMaterialMetalNo. of pins8 -pinEncodingA-codedConnection 2Connection to traType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
TypeMaleMaterialMetalNo. of pins8 -pinEncodingA-codedConnection 2EncodingFunctionConnection to traType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
MaterialMetalNo. of pins8 -pinEncodingA-codedConnection 2Encotion to traFunctionConnection to traType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
No. of pins8 -pinEncodingA-codedConnection 2FunctionConnection to traType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
EncodingA-codedConnection 2FunctionConnection to traType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
Connection 2FunctionConnection to traType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
FunctionConnection to traditionType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
FunctionConnection to traditionType of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
Type of connectionConnectorThread sizeM12TypeFemaleMaterialMetalNo. of pins5 -pinEncodingA-coded	
Thread sizeM12TypeFemaleMaterialMetalNo. of pins5 - pinEncodingA-coded	nsmitter
Type Female Material Metal No. of pins 5 - pin Encoding A-coded	
MaterialMetalNo. of pins5 -pinEncodingA-coded	
No. of pins5 -pinEncodingA-coded	
Encoding A-coded	
Mechanical data	
Design Cubic	
Dimension (W x H x L) 29 mm x 35.4 mm	n x 1,515 mm
Housing material Metal	
Metal housing Aluminum	
Lens cover material Plastic	
Net weight 1,600 g	
Housing color Silver	
Type of fastening Groove mounting	
Via optional mou	nting device
Operation and display	
Type of display LED	
OLED display	
Number of LEDs 2 Piece(s)	
Type of configuration Software	
Teach-in	
Operational controls Membrane keybo	
	pard

Leuze

Technical data

Leuze

Environmental data

Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C
Certifications	


Degree of protection	IP 65
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2

Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549

Dimensioned drawings

All dimensions in millimeters

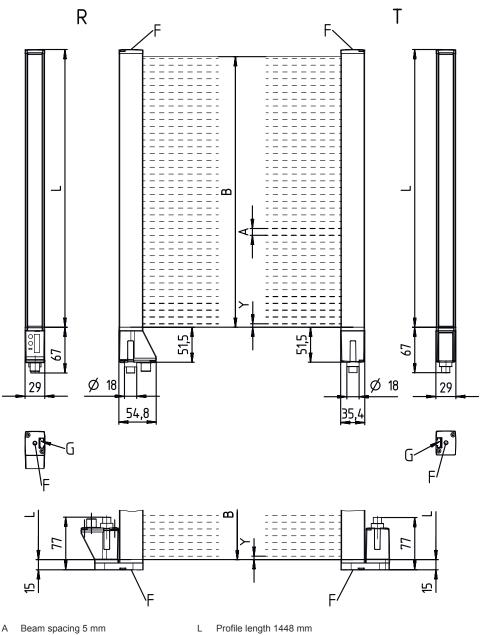


- Beam spacing 5 mm А
- В Measurement field length 1440 mm
- F M6 thread G Fastening groove
- Transmitter Т R Receiver
- 2.5 mm Υ

Leuze

Dimensioned drawings



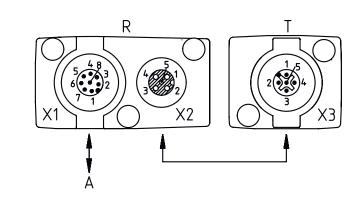

A PWR / SW IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+	
2	I/O 1	
3	GND	
4	IO-Link	
5	I/O 2	
6	OUT V	
7	OUT mA	
8	AGND	



Connection 2

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



Operation and display

Light curtain receiver • Part no.: 50119813 • CML720i-R05-1440.A/CV-M12		Leuze
LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

 Part no.	Designation	Article	Description
50119385	CML720i-T05- 1440.A-M12	Light curtain transmitter	Operating range: 0.1 3.5 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series 720i: 720i series 730i: 730i series
Y	Device type T: transmitter R: receiver
ZZ	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note	
6 A list wi	th all available device types can be found on the Leuze website at www.leuze.com.

Notes

Observe intended use!

This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ Only use the product in accordance with its intended use.

	For UL applications:
A	 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code). These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
1 + 1 + + + + + + + + + + + + + + + + +	50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Leuze

Accessories

Leuze

Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

	Part no.	Designation	Article	Description
ц.	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
A	✤ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.