

Technical data sheet Optical distance sensor

Part no.: 50147694

ODS9L2.8/L6X-1050-M12



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Accessories













Technical data



Basic data

| Series | 9 |
|-------------------------|--|
| Application | Fill-level monitoring |
| | Length measurement in material cutting |
| | Object measurement |
| Type of scanning system | Against object |

Optical data

| - | |
|--------------------------------------|------------------------|
| Beam path | Collimated |
| Light source | Laser, Red |
| Wavelength | 650 nm |
| Laser class | 2, IEC/EN 60825-1:2014 |
| Transmitted-signal shape | Pulsed |
| Pulse duration | 22,000 µs |
| Light spot size [at sensor distance] | 1.5 mm [1,050 mm] |
| Type of light spot geometry | Round |

Measurement data

| Measurement range | 50 1,050 mm |
|--|-------------------------------------|
| Resolution | 0.1 mm |
| Accuracy | 1.5 % |
| Reference value, accuracy | Measurement distance 200 mm 1000 mm |
| Reproducibility (1 sigma) | 0.2 mm |
| Temperature drift | 0.02 %/K |
| Referencing | No |
| Optical distance measurement principle | Triangulation |
| | |

Electrical data

| Protective circuit | Polarity reversal protection |
|--------------------|------------------------------|
| | Short circuit protected |
| | Transient protection |

Performance data

| Supply voltage U _B | 18 30 V, DC |
|-------------------------------|-----------------------------|
| Residual ripple | 0 15 %, From U _B |
| Open-circuit current | 0 50 mA |

Outputs

Number of digital switching outputs 2 Piece(s)

Switching outputs

| Voltage type | DC |
|-------------------|-----------------------------|
| Switching voltage | high: ≥(U _B -2V) |
| | low: ≤ 2 V |

Switching output 1

| Assignment | Connection 1, pin 4 |
|---------------------|--|
| Switching element | Transistor, Push-pull |
| Switching principle | IO-Link / light switching (PNP)/dark switching (NPN) |

Switching output 2

| Assignment | Connection 1, pin 2 |
|---------------------|--|
| Switching element | Transistor, Push-pull |
| Switching principle | Light switching (PNP)/dark switching (NPN) |

Time behavior

| Response time | 2.5 ms, At short range / 20 ms at maximum distance / under constant ambient conditions, 90% diffuse reflec- tion, standard measure mode |
|-----------------|--|
| Readiness delay | 300 ms |
| reduiness delay | 000 m3 |

Interface

| IO-Link COM mode COM3 Profile Smart sensor profile Min. cycle time COM3 = 0.5 ms Frame type 2.V Port type A Specification V1.1 SIO-mode support Process data IN 4 byte | Туре | IO-Link |
|--|------------------|----------------------|
| Profile Smart sensor profile Min. cycle time COM3 = 0.5 ms Frame type 2.V Port type A Specification V1.1 SIO-mode support Yes | IO-Link | |
| Min. cycle time COM3 = 0.5 ms Frame type 2.V Port type A Specification V1.1 SIO-mode support Yes | COM mode | COM3 |
| Frame type 2.V Port type A Specification V1.1 SIO-mode support Yes | Profile | Smart sensor profile |
| Port type A Specification V1.1 SIO-mode support Yes | Min. cycle time | COM3 = 0.5 ms |
| Specification V1.1 SIO-mode support Yes | Frame type | 2.V |
| SIO-mode support Yes | Port type | A |
| | Specification | V1.1 |
| Process data IN 4 byte | SIO-mode support | Yes |
| · | Process data IN | 4 byte |
| Process data OUT 8 bit | Process data OUT | 8 bit |
| Dual Channel Yes | Dual Channel | Yes |

Connection

| Number of connections | 1 Piece(s) | |
|-----------------------|-------------------------|--|
| Connection 1 | | |
| Function | Signal OUT | |
| | Voltage supply | |
| Type of connection | Connector, Turning, 90° | |
| Thread size | M12 | |
| Туре | Male | |
| Material | Plastic | |
| No. of pins | 5 -pin | |
| Encoding | A-coded | |

Mechanical data

| Design | Cubic |
|-----------------------|------------------------------|
| Dimension (W x H x L) | 21 mm x 50 mm x 50 mm |
| Housing material | Plastic |
| Lens cover material | Glass |
| Net weight | 50 g |
| Housing color | Red |
| Type of fastening | Through-hole mounting |
| | Via optional mounting device |

Operation and display

| Type of display | LED |
|----------------------|-----------------|
| | OLED display |
| Number of LEDs | 2 Piece(s) |
| Operational controls | Control buttons |
| | PC software |

Environmental data

| Ambient temperature, operation | -20 50 °C |
|--------------------------------|-------------------------|
| Ambient temperature, storage | -30 70 °C |
| Ambient light sensitivity | 20,000 lx, EN 60947-5-2 |

Technical data



Certifications

| Degree of protection | IP 67 |
|----------------------|-------|
| Protection class | III |
| Approvals | UL |


Classification


| Customs tariff number | 90318020 |
|-----------------------|----------|
| ECLASS 5.1.4 | 27270801 |
| ECLASS 8.0 | 27270801 |
| ECLASS 9.0 | 27270801 |
| ECLASS 10.0 | 27270801 |
| ECLASS 11.0 | 27270801 |
| ECLASS 12.0 | 27270916 |
| ECLASS 13.0 | 27270916 |
| ECLASS 14.0 | 27270916 |
| ECLASS 15.0 | 27270916 |
| ETIM 5.0 | EC001825 |
| ETIM 6.0 | EC001825 |
| ETIM 7.0 | EC001825 |
| ETIM 8.0 | EC001825 |
| ETIM 9.0 | EC001825 |
| ETIM 10.0 | EC001825 |


Dimensioned drawings




All dimensions in millimeters



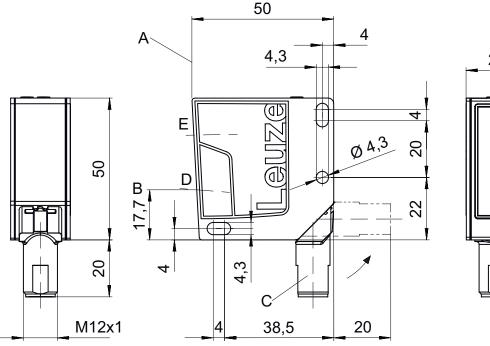

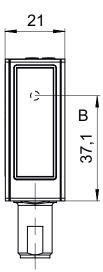



- Reference edge for the measurement
- Optical axis
- Device plug M12

- Receiver
- Transmitter
- Color display

- Yellow LED
- Green LED
- Control buttons

Electrical connection


Connection 1

| Function | Signal OUT |
|--------------------|----------------|
| | Voltage supply |
| Type of connection | Connector |
| Thread size | M12 |
| Туре | Male |
| Material | Plastic |
| No. of pins | 5 -pin |
| Encoding | A-coded |

Electrical connection




| Pin | Pin assignment |
|-----|-----------------|
| 1 | 18 30 V DC + |
| 2 | OUT 2 |
| 3 | GND |
| 4 | IO-Link / OUT 1 |
| 5 | n.c. |



Diagrams

Accuracy of measurement

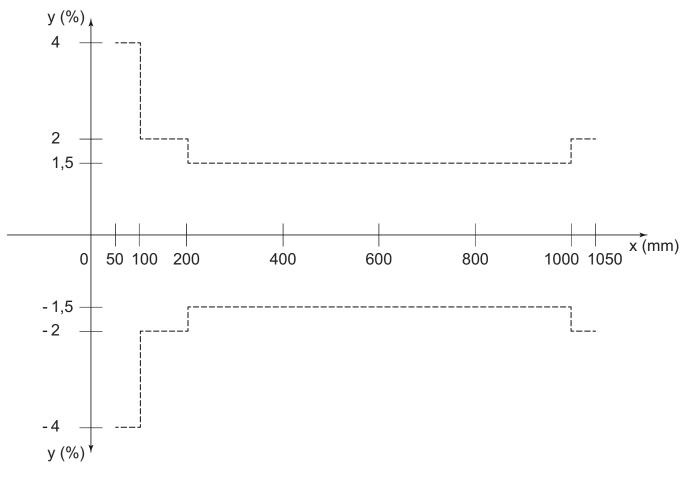

- x Distance [mm]
- y Measurement error in % of measurement value

Operation and display

| LED | Display | Meaning |
|-----|--------------------------|---------------------------------|
| 1 | Green, continuous light | Ready |
| 2 | Yellow, continuous light | Object in the measurement range |

Part number code



Part designation: ODS9XX.Y/ZAB-CCC-DDD

| ODS9 | Operating principle Optical distance sensor of the 9 series |
|------|--|
| XX | Light source L2: laser class 2 L1: laser class 1 |
| Υ | Equipment 8: OLED display and membrane keyboard for configuration |
| Z | Switching output/function OUT 1/IN: Pin 4 or black conductor L: IO-Link |
| Α | Switching output / function OUT 2/IN: pin 2 or white conductor A: Analog output 6: push-pull switching output, PNP light switching, NPN dark switching |
| В | Switching output / function OUT 3/IN: Pin 5 X: pin not used 6: push-pull switching output, PNP light switching, NPN dark switching K: Multifunction input (factory setting: deactivation input) |
| ccc | Operating range 100: operating range 50 100 mm 200: operating range 50 200 mm 450: operating range 50 450 mm 650: operating range 50 650 mm 1050: operating range 50 1050 mm |
| DDD | Electrical connection M12: M12 connector |
| | |

Note



🖔 A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes



Observe intended use!



- This product is not a safety sensor and is not intended as personnel protection.
- \$ The product may only be put into operation by competent persons.
- \$ Only use the product in accordance with its intended use.



ATTENTION! LASER RADIATION - CLASS 2 LASER PRODUCT



Do not stare into beam!

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 2 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.

- 🦫 Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- b Do not point the laser beam of the device at persons!
- 🖖 Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- 🔖 CAUTION! The use of operating and adjusting devices other than those specified here or the carrying out of differing procedures may lead to dangerous exposure to radiation!

info@leuze.com • www.leuze.com

- \$ The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

We reserve the right to make technical

Notes



NOTE



Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- "Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- 🌣 Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- 🌣 Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

Accessories

Connection technology - Connection unit

| Part no. | Designation | Article | Description |
|----------|---------------------------|----------------|--|
| 50144900 | MD 798i-11-82/L5- 2222 | IO-Link master | Type: IO-Link master Current consumption, max.: 11,000 mA Switching outputs for each sensor connection: 1 Piece(s) Switching output: Transistor, PNP Interface: IO-Link, Automatic protocol detection, EtherNet IP, Modbus TCP, PROFINET Connections: 12 Piece(s) Sensor connections: 8 Piece(s) Connections for voltage supply: 2 Piece(s) Interface connections: 2 Piece(s) Degree of protection: IP 67, IP 65, IP 69K |

Connection technology - Connection cables

| | Part no. | Designation | Article | Description |
|--|----------|------------------------|------------------|---|
| | 50132077 | KD U-M12-5A-V1- 020 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: No Cable length: 2.000 mm Sheathing material: PVC |
| | 50132079 | KD U-M12-5A-V1- 050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC |

Mounting technology - Mounting brackets

| Part no. | Designation | Article | Description |
|----------|-------------|------------------|---|
| 50118543 | BT 300M.5 | Mounting bracket | Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type, Suited for M4 screws Type of mounting device: Adjustable Material: Stainless steel |

The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2025-04-06

Leuze electronic GmbH + Co. KG

Accessories



Mounting technology - Rod mounts

| Part no. | Designation | Article | Description |
|----------|--------------|-----------------|--|
| 50117252 | BTU 300M-D12 | Mounting system | Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type, Suited for M4 screws Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal |
| 50128380 | BTU 460M-D12 | Mounting system | Design of mounting device: Mounting system Fastening, at system: For 12 mm rod Mounting bracket, at device: Screw type Type of mounting device: Adjustable, Turning, 360° Material: Metal |

Note



🔖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.