

Technical data sheet Light curtain receiver Part no.: 50119806 CML720i-R05-880.A/CV-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

Technical data

Basic data

| Series | 720 |
|--|--|
| Operating principle | Throughbeam principle |
| Device type | Receiver |
| Contains | 2x BT-NC sliding block |
| Application | Object measurement |
| Special version | |
| Special version | Crossed-beam scanning |
| | Diagonal-beam scanning |
| | Parallel-beam scanning |
| Optical data | |
| Operating range | 0.1 3.5 m |
| | Guaranteed operating range |
| | 0.1 4.5 m |
| | Typical operating range |
| | 880 mm |
| ů. | 176 Piece(s) |
| | 5 mm |
| | |
| Measurement data | |
| Minimum object diameter | 10 mm |
| Electrical data | |
| Protective circuit | Polarity reversal protection |
| | Short circuit protected |
| | Transient protection |
| | · |
| Performance data | |
| Supply voltage U _B | 18 30 V, DC |
| Residual ripple | 0 15 %, From U _B |
| | |
| Open-circuit current | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. |
| Open-circuit current | 0 215 mA, The specified values refer to the entire package consisting of trans- |
| Open-circuit current Outputs | 0 215 mA, The specified values refer to the entire package consisting of trans- |
| Open-circuit current Outputs | 0 215 mA, The specified values refer to the entire package consisting of trans mitter and receiver. |
| Open-circuit current Outputs Number of analog outputs Analog outputs | 0 215 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 2 Piece(s) |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type | 0 215 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 2 Piece(s) Analog output |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable | 0 215 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance | 0 215 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. | 0 215 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable | 0 215 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type | 0 215 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs | 0 215 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs | 0 215 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC |
| Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs | 0 215 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA $6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V |

| Input/outp | out 1 | |
|------------------------|---------------|------------------------------|
| | lisable delay | 1 ms |
| Time behavior | | |
| Readiness delay | | 450 ms |
| Cycle time | | 5.68 ms |
| Response time p | er beam | 30 µs |
| Service interfa | C P | |
| | | |
| Туре | | IO-Link |
| IO-Link | | |
| Function | | Configuration via software |
| | | Service |
| Connection | | |
| Number of conn | ections | 2 Piece(s) |
| Plug outlet | | Axial |
| | | |
| Connection Function | 1 | Configuration interface |
| Function | | Configuration interface |
| | | Signal IN |
| | | Signal OUT |
| | | Voltage supply |
| Type of conne | ction | Connector |
| Thread size | | M12 |
| Туре | | Male |
| Material | | Metal |
| No. of pins | | 8 -pin |
| Encoding | | A-coded |
| Connection | 2 | |
| Function | | Connection to transmitter |
| Type of conne | ction | Connector |
| Thread size | | M12 |
| Туре | | Female |
| Material | | Metal |
| No. of pins | | 5 -pin |
| Encoding | | A-coded |
| | | |
| Mechanical da | ta | |
| Design | | Cubic |
| Dimension (W x | - | 29 mm x 35.4 mm x 955 mm |
| Housing materia | 1 | Metal |
| Metal housing | | Aluminum |
| Lens cover mate | rial | Plastic |
| Net weight | | 1,100 g |
| Housing color | | Silver |
| Type of fastening | 9 | Groove mounting |
| | | Via optional mounting device |
| Operation and | display | |
| Type of display | | LED |
| | | OLED display |
| Number of LEDs | | 2 Piece(s) |
| Type of configur | ation | Software |
| | | Teach-in |
| | | Teach-In |

Leuze

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the right to make technical changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

Technical data

Leuze

Environmental data


| Ambient temperature, operation | -30 60 °C |
|--------------------------------|-----------|
| Ambient temperature, storage | -40 70 °C |
| Certifications | |

| Degree of protection | IP 65 |
|----------------------|---------------|
| Protection class | III |
| Approvals | c UL US |
| Standards applied | IEC 60947-5-2 |

| Customs tariff number | 90314990 |
|-----------------------|----------|
| ECLASS 5.1.4 | 27270910 |
| ECLASS 8.0 | 27270910 |
| ECLASS 9.0 | 27270910 |
| ECLASS 10.0 | 27270910 |
| ECLASS 11.0 | 27270910 |
| ECLASS 12.0 | 27270910 |
| ECLASS 13.0 | 27270910 |
| ECLASS 14.0 | 27270910 |
| ECLASS 15.0 | 27270910 |
| ETIM 5.0 | EC002549 |
| ETIM 6.0 | EC002549 |
| ETIM 7.0 | EC002549 |
| ETIM 8.0 | EC002549 |
| ETIM 9.0 | EC002549 |
| ETIM 10.0 | EC002549 |

Dimensioned drawings

All dimensions in millimeters

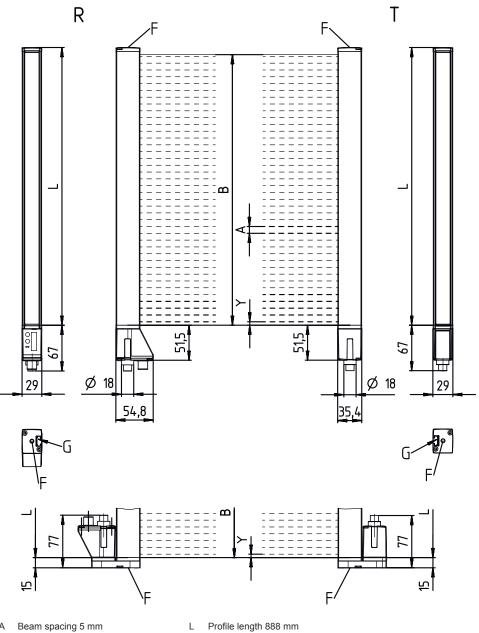

Beam spacing 5 mm А

- В Measurement field length 880 mm
- F M6 thread

G

- Fastening groove
- R Receiver Υ 2.5 mm

Т


Transmitter

We reserve the right to make technical Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com changes
 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

Leuze

Dimensioned drawings



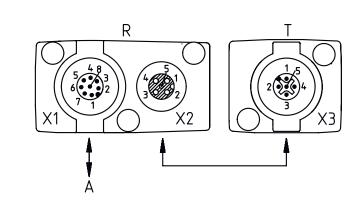

A PWR / SW IN / OUT


Electrical connection

Connection 1

| Function | Configuration interface |
|--------------------|-------------------------|
| | Signal IN |
| | Signal OUT |
| | Voltage supply |
| Type of connection | Connector |
| Thread size | M12 |
| Туре | Male |
| Material | Metal |
| No. of pins | 8 -pin |
| Encoding | A-coded |
| | |

Pin Pin assignment

| 1 | V+ | | |
|---|---------|--|--|
| 2 | I/O 1 | | |
| 3 | GND | | |
| 4 | IO-Link | | |
| 5 | I/O 2 | | |
| 6 | OUT V | | |
| 7 | OUT mA | | |
| 8 | AGND | | |
| | | | |




Connection 2

| Function | Connection to transmitter |
|--------------------|---------------------------|
| Type of connection | Connector |
| Thread size | M12 |
| Туре | Female |
| Material | Metal |
| No. of pins | 5 -pin |
| Encoding | A-coded |

Pin Pin assignment

| 1 | FE/SHIELD |
|---|------------|
| 2 | V+ |
| 3 | GND |
| 4 | RS 485 Tx+ |
| 5 | RS 485 Tx- |



Operation and display

Leuze

| LED | Display | Meaning |
|-----|--------------------------|--|
| 1 | Green, continuous light | Operational readiness |
| | Green, flashing | Teach / error |
| 2 | Yellow, continuous light | Light path free, with function reserve |
| | Yellow, flashing | No function reserve |
| | Off | Object detected |

Suitable transmitters

| Part no. | Designation | Article | Description |
|--------------|---------------------------|------------------------------|---|
| 50119378 | CML720i-T05-880.A- M12 | Light curtain transmitter | Operating range: 0.1 3.5 m Connection: Connector, M12, Axial, 5 -pin |

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

| CML | Operating principle Measuring light curtain |
|-----------|---|
| 7XXi | Series 720i: 720i series 730i: 730i series |
| Y | Device type T: transmitter R: receiver |
| ZZ | Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm |
| AAAA | Measurement field length [mm], dependent on beam spacing |
| В | Equipment A: Axial connector outlet R: Rear connector outlet |
| CCC | Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus |
| DDD | Special equipment -PS: Power Setting |
| EEE | Electrical connection M12: M12 connector |
| FFF | -EX: Explosion protection |
| Note | |
| A list wi | th all available device types can be found on the Leuze website at www.leuze.com. |

Notes

Observe intended use!

✤ This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ Only use the product in accordance with its intended use.

| | For UL applications: |
|---|---|
| A | For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code). These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7) |

Accessories

Connection technology - Connection cables

| Part no. | Designation | Article | Description |
|--------------|--------------------|------------------|--|
| 50135128 | KD S-M12-8A-P1-050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR |

Connection technology - Interconnection cables

| | Part no. | Designation | Article | Description |
|--|----------|---------------------------------|-----------------------|--|
| | 50129781 | KDS DN-M12-5A- M12-5A-P3-050 | Interconnection cable | Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR |

Mounting technology - Mounting brackets

| | Part no. | Designation | Article | Description |
|--|----------|----------------|---------------------|---|
| 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1 | 50142900 | BT 700M.5-2SET | Mounting device set | Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel |

7/8

Leuze

Accessories

Leuze

Configuration devices

| Part no. | Designation | Article | Description |
|--------------|------------------------------|-----------------|--|
| 50121098 | SET MD12-US2-IL1.1 + Zub. | Diagnostics set | Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20 |

Services

| | Part no. | Designation | Article | Description |
|----|----------|-------------|------------------|--|
| ц. | S981001 | CS10-S-110 | Start-up support | Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. |
| | S981005 | CS10-T-110 | Product training | Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. |

| | Note |
|---|---|
| A | s A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page. |