

Technical data sheet Light curtain receiver Part no.: 50119822 CML720i-R05-2160.A/CV-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

Technical data

Basic data

Series	720	
Operating principle	Throughbeam principle	
Device type	Receiver	
Contains	2x BT-NC sliding block	
Application	Object measurement	
Special version		
Special version	Crossed-beam scanning	
	Diagonal-beam scanning	
	Parallel-beam scanning	
	Ŭ	
Optical data		
	0.1 3.5 m	
	Guaranteed operating range	
	0.1 4.5 m	
	Typical operating range	
Ŭ	2,160 mm	
	432 Piece(s)	
Beam spacing	5 mm	
Measurement data		
Minimum object diameter	10 mm	
-		
Electrical data		
Protective circuit	Polarity reversal protection	
	Short circuit protected	
	Transient protection	
Performance data		
Supply voltage U _B	18 30 V, DC	
	0 15 %, From U _B	
	D	
Open-circuit current	0 435 mA, The specified values refer	
Open-circuit current	0 435 mA, The specified values refer to the entire package consisting of trans-	
Open-circuit current Outputs	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.	
Open-circuit current Outputs	0 435 mA, The specified values refer to the entire package consisting of trans-	
Open-circuit current Outputs	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.	
Open-circuit current Outputs Number of analog outputs Analog outputs	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current	 0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max.	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s)	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable 	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC 	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable 	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Number of inputs/outputs selectable Output resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC 	
Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Analog output 2 Type Inputs/outputs selectable Output resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA $6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V	

Immut/outmut 4		
Input/output 1 Activation/disable delay	1 ms	
Activation/ulsuble delay	11115	
Time behavior		
Readiness delay	450 ms	
Cycle time	13.36 ms	
Response time per beam	30 µs	
Service interface		
Туре	IO-Link	
IO-Link Function	Configuration via activara	
Function	Configuration via software Service	
Connection		
Number of connections	2 Piece(s)	
Plug outlet	Axial	
Plug outlet	Axiai	
Connection 1		
Function	Configuration interface	
	Signal IN	
	Signal OUT	
	Voltage supply	
Type of connection	Connector	
Thread size	M12	
Туре	Male	
Material	Metal	
No. of pins	8 -pin	
Encoding	A-coded	
Elicounig	A-coded	
Connection 2		
Function	Connection to transmitter	
Type of connection	Connector	
Thread size	M12	
Туре	Female	
Material	Metal	
No. of pins	5 -pin	
Encoding	A-coded	
Encounty	// coded	
Mechanical data		
Design	Cubic	
Dimension (W x H x L)	29 mm x 35.4 mm x 2,235 mm	
Housing material	Metal	
Metal housing	Aluminum	
Lens cover material	Plastic	
Net weight	2,250 g	
Housing color	Silver	
Type of fastening	Groove mounting	
	Via optional mounting device	
Operation and display		
Type of display	LED	
• •	OLED display	
Number of LEDs	2 Piece(s)	
Type of configuration	Software	
. Jeo or configuration	Teach-in	
Operational controls	Membrane keyboard	

Leuze

Technical data

Leuze

Environmental data


Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C
Certifications	

Degree of protection	IP 65	
Protection class	III	
Approvals	c UL US	
Standards applied	IEC 60947-5-2	

Classification	
Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ECLASS 15.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549

Dimensioned drawings

All dimensions in millimeters

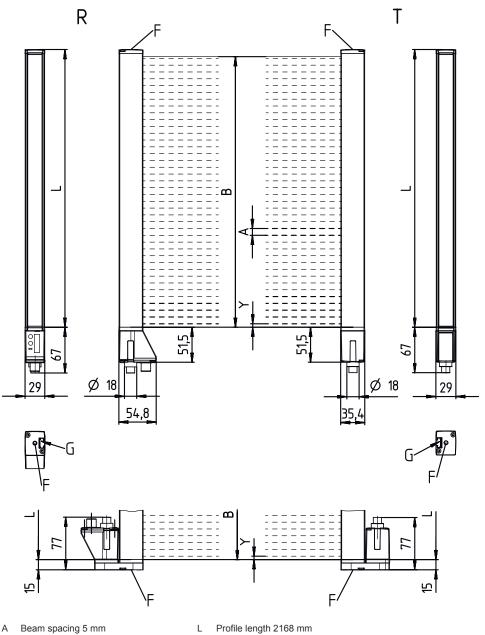

Beam spacing 5 mm А

Fastening groove

- В Measurement field length 2160 mm
- F M6 thread

G


- Transmitter Т
- R Receiver
- 2.5 mm Υ

4/8

Leuze

Dimensioned drawings



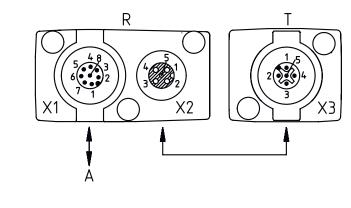

A PWR / SW IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+
2	I/O 1
3	GND
4	IO-Link
5	I/O 2
6	OUT V
7	OUT mA
8	AGND



Connection 2

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



Operation and display

Leuze

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

 Part no.	Designation	Article	Description
50119394	CML720i-T05- 2160.A-M12	Light curtain transmitter	Operating range: 0.1 3.5 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

Operating principle Measuring light curtain
Series 720i: 720i series 730i: 730i series
Device type T: transmitter R: receiver
Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
Measurement field length [mm], dependent on beam spacing
Equipment A: Axial connector outlet R: Rear connector outlet
Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
Special equipment -PS: Power Setting
Electrical connection M12: M12 connector
-EX: Explosion protection
th all available device types can be found on the Leuze website at www.leuze.com.

Notes

Observe intended use!

This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ Only use the product in accordance with its intended use.

	For UL applications:
A	 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code). These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
]	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

7/8

Leuze

Accessories

Leuze

Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

	Part no.	Designation	Article	Description
ц.	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
A	✤ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.