

## **Technical data sheet Light curtain receiver** Part no.: 50133775 CML730i-R05-1120.A/CV-PS-M12



Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com • changes The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2024-06-24

1/8

### **Technical data**

#### Basic data

asic data	
eries	730
perating principle	Throughbeam principle
evice type	Receiver
ontains	2x BT-NC sliding block
pplication	Detection of transparent films
	Detection of transparent objects
	Object detection in film tube
	Object measurement
	Radiation of semi-transparent media
ptical data	
perating range	0.1 4.5 m
perating range	Guaranteed operating range
perating range, transparent media	0.1 1.75 m
perating range limit	0.1 6 m
perating range limit	Typical operating range
easurement field length	1,120 mm
umber of beams	224 Piece(s)
eam spacing	5 mm
erri ekanış	•
leasurement data	
inimum object diameter	10 mm
lectrical data	
rotective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Performance data Supply voltage U <sub>B</sub>	18 30 V, DC
	18 30 V, DC 0 15 %, From U <sub>B</sub>
Supply voltage U <sub>B</sub>	0 15 %, From $\rm U_B$ 0 270 mA, The specified values refer
Supply voltage U <sub>B</sub> Residual ripple	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of trans
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of trans
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>1 Piece(s)</li> <li>Analog output</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>1 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>1 Piece(s)</li> <li>Analog output</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>1 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>1 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of tran mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V Freely configurable
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max.	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V Freely configurable 100 mA
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max. Input resistance	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of transmitter mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V Freely configurable 100 mA 6,000 Ω
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	0 15 %, From U <sub>B</sub> 0 270 mA, The specified values refer to the entire package consisting of transmitter mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V Freely configurable 100 mA 6,000 Ω 3 Piece(s)
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>1 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> <li>0 11 V</li> <li>Freely configurable</li> <li>100 mA</li> <li>6,000 Ω</li> <li>3 Piece(s)</li> <li>Inputs/outputs selectable</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>1 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> <li>0 11 V</li> <li>Freely configurable</li> <li>100 mA</li> <li>6,000 Ω</li> <li>3 Piece(s)</li> <li>Inputs/outputs selectable</li> <li>DC</li> </ul>
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	0 15 %, From $U_B$ 0 270 mA, The specified values refer to the entire package consisting of transmitter mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V Freely configurable 100 mA 6,000 Ω 3 Piece(s) Inputs/outputs selectable DC Typ. $U_B / 0$ V
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	0 15 %, From $U_B$ 0 270 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V Freely configurable 100 mA 6,000 Ω 3 Piece(s) Inputs/outputs selectable DC Typ. $U_B$ / 0 V DC
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	0 15 %, From $U_B$ 0 270 mA, The specified values refer to the entire package consisting of transmitter mitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V Freely configurable 100 mA 6,000 Ω 3 Piece(s) Inputs/outputs selectable DC Typ. $U_B / 0$ V
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Outputs Number of analog outputs Analog outputs Type Current Voltage Analog output 1 Type Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	0 15 %, From $U_B$ 0 270 mA, The specified values refer to the entire package consisting of transmitter and receiver. 1 Piece(s) Analog output 0 24 mA 0 11 V Freely configurable 100 mA 6,000 Ω 3 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: ≥6V

# Leuze

Time behavior
---------------

Readiness delay	450 ms		
Cycle time	2.39 ms		
Response time per beam	10 µs		
Oomdoo tutuufu			
Service interface			
Туре	IO-Link		
IO-Link			
Function	Configuration via software		
	Service		
Connection			
Number of connections	2 Piece(s)		
Plug outlet	Axial		
Connection 1			
Function	Configuration interface		
1 dilotion	Signal IN		
	Signal OUT		
	Voltage supply		
Type of connection	Connector		
Thread size	M12		
Type	Male		
Material	Metal		
No. of pins	8 -pin		
Encoding	A-coded		
Connection 2			
Function	Connection to transmitter		
Type of connection	Connector		
Thread size	M12		
Туре	Female		
Material	Metal		
No. of pins	5 -pin		
Encoding	A-coded		
Mechanical data			
Design	Cubic		
Dimension (W x H x L)	29 mm x 35.4 mm x 1,195 mm		
Housing material	Metal		
Metal housing	Aluminum		
Lens cover material	Plastic		
Net weight	1,300 g		
Housing color	Silver		
Type of fastening	Groove mounting		
	Via optional mounting device		
Operation and display			
Type of display	LED		
	OLED display		
Number of LEDs	2 Piece(s)		
Type of configuration	Software		
-	Teach-in		
Operational controls	Membrane keyboard		
Environmental data			
Ambient temperature, ope	eration -30 60 °C		
Ambient temperature, stor			

### **Technical data**

## Leuze

#### Certifications


Degree of protection	IP 65
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2

#### Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549

### **Dimensioned drawings**

All dimensions in millimeters

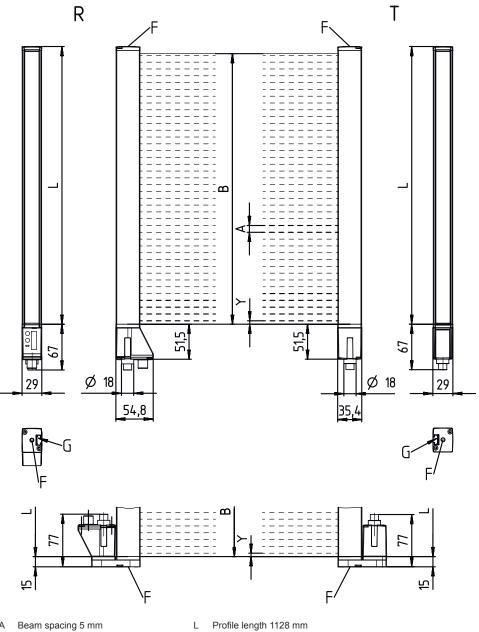

Beam spacing 5 mm А

Fastening groove

- В Measurement field length 1120 mm
- F M6 thread


G

- Т Transmitter
- R Receiver
- Υ 2.5 mm

Leuze

### **Dimensioned drawings**



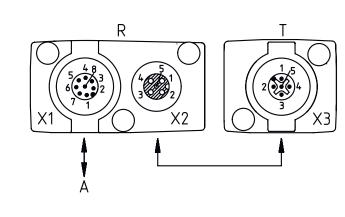

A PWR / SW IN / OUT


### **Electrical connection**

**Connection 1** 

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Pin Pin assignment

1	V+	
2	I/O 1	
3	GND	
4	IO-Link	
5	I/O 2	
6	I/O 3	
7	OUT mA / V	
8	AGND	




#### **Connection 2**

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

#### Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



## Operation and display

LED 1

2

ration and display			Leuze
	Display	Meaning	
	Green, continuous light	Operational readiness	
	Green, flashing	Teach / error	
	Yellow, continuous light	Light path free, with function reserv	e
	Yellow, flashing	No function reserve	
	Off	Object detected	

### Suitable transmitters

 Part no.	Designation	Article	Description
50133776	CML730i-T05- 1120.A-PS-M12	Light curtain transmitter	Operating range: 0.1 4.5 m Connection: Connector, M12, Axial, 5 -pin

#### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

	Operating principle Measuring light curtain
	Series 720i: 720i series 730i: 730i series
	Device type T: transmitter R: receiver
	Beam spacing           05: 5 mm           10: 10 mm           20: 20 mm           40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
	Equipment A: Axial connector outlet R: Rear connector outlet
	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
	Special equipment -PS: Power Setting
	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note	n all available device types can be found on the Leuze website at www.leuze.com.

#### Notes

#### Observe intended use!

This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$  The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$  Only use the product in accordance with its intended use.

	For UL applications:
A	<ul> <li>For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).</li> <li>These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)</li> </ul>

#### Accessories

#### Connection technology - Connection cables

	Part no.	Designation	Article	Description
Ŭ	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

#### Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

#### Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
1 + 1 + + + + + + + + + + + + + + + + +	50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Leuze

#### Accessories

# Leuze

### Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

#### Services

	Part no.	Designation	Article	Description
ц.	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
A	Sector A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.