### Leuze

### Technical data sheet Optical data transmission

Part no.: 50151306 DDLS 538 120.4 L W S3



The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7027

### **Technical data**

# Leuze


Basic data		
Series	DDLS 500	
Special version		
Special version	Integrated laser alignment aid Not influenced by reflective surfaces Operation of parallel light axes Wide angle version	
Optical data		
Working range	100 120,000 mm	
Light source	Laser	
Transmission frequency	F4	
Opening angle	1.6 °	
Electrical data		
Performance data		
Supply voltage U <sub>B</sub>	18 30 V, DC	
Inputs		
Number of digital switching inputs	1 Piece(s)	
с с.		
Outputs		
Number of digital switching outputs	1 Piece(s)	
late de la		
Interface		
Transmission protocol	CIPsafety	
Туре	EtherCAT link down 70 ms, EtherCAT	
Type		
1990	Safety-over-EtherCAT (FSoE)	
EtherCAT		
EtherCAT	Safety-over-EtherCAT (FSoE)	
EtherCAT Function	Safety-over-EtherCAT (FSoE) Process	
EtherCAT Function Switch functionality	Safety-over-EtherCAT (FSoE) Process None	
EtherCAT Function Switch functionality Transmission speed Transmission protocol	Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE)	Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE	
EtherCAT Function Switch functionality Transmission speed Transmission protocol	Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE)	Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function	Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection	Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1	Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process 2 Piece(s) Connector	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process 2 Piece(s)  Connector POWER	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12 Male	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type No. of pins	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12 Male 5 -pin	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12 Male	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type No. of pins	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12 Male 5 -pin	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type No. of pins Encoding	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12 Male 5 -pin	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type No. of pins Encoding Connection 2	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12 Male 5 -pin A-coded	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type No. of pins Encoding Connection 2 Type of connection	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12 Male 5 -pin A-coded  Connector	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type No. of pins Encoding Connection 2 Type of connection Designation on device	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE  Process  2 Piece(s)  Connector POWER M12 Male 5 -pin A-coded  Connector BUS	
EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size Type No. of pins Encoding Connection 2 Type of connection Designation on device Thread size	Safety-over-EtherCAT (FSoE)  Process None 100 Mbit/s EtherCAT FSoE Process 2 Piece(s)  Connector POWER M12 Male 5 -pin A-coded  Connector BUS M12	


Dimension (W x H x L)	100 mm x 156 mm x 99.5 mm	
Housing material	Metal	
Net weight	1,750 g	
Operation and display		
Type of display	Bar graph	
	LED	
Environmental data		
Ambient temperature, operation	-5 50 °C	
Ambient temperature, storage	-35 70 °C	
Certifications		
Degree of protection	IP 65	
Approvals	c UL US	
Test procedure for EMC in accordance	EN 1000-6-4	
with standard	EN 61000-6-2	
Test procedure for noise in accordance with standard	EN 60068-2-64	
Test procedure for oscillation in accordance with standard	EN 60068-2-6	
Test procedure for shock in	EN 60068-2-27	
accordance with standard	EN 60068-2-27	
•	EN 60068-2-27	
accordance with standard	EN 60068-2-27 84718000	
accordance with standard Classification Customs tariff number ECLASS 5.1.4		
accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0	84718000 19039001 19179090	
accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0	84718000 19039001	
accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0	84718000 19039001 19179090	
accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0	84718000 19039001 19179090 19179090	
accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0	84718000 19039001 19179090 19179090 19170506	
Accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0	84718000 19039001 19179090 19179090 19170506 19170506	
Accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0	84718000 19039001 19179090 19179090 19170506 19170506 19170506	
Accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 13.0	84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506	
Accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 13.0 ECLASS 14.0	84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506	
Accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 12.0 ECLASS 13.0 ECLASS 14.0 ECLASS 15.0	84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506 19170506	
Accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 12.0 ECLASS 13.0 ECLASS 14.0 ECLASS 15.0 ETIM 5.0	84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506 19170506 19170506 19170506 EC000515	
accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 12.0 ECLASS 13.0 ECLASS 14.0 ECLASS 15.0 ETIM 5.0 ETIM 6.0	84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506 19170506 EC000515 EC000515	
Accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 12.0 ECLASS 13.0 ECLASS 14.0 ECLASS 15.0 ETIM 5.0 ETIM 5.0 ETIM 7.0	84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506 19170506 EC000515 EC000515 EC000515	


### **Dimensioned drawings**

Leuze

All dimensions in millimeters

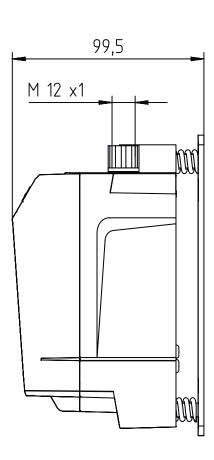

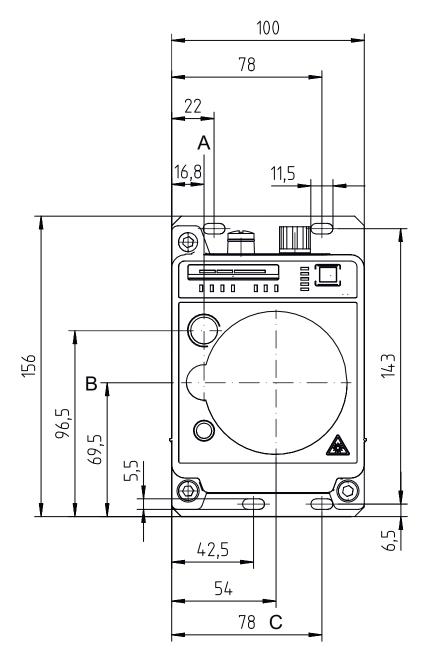



A Center axis of transmitter and alignment laser

B Center axis of transmitter and receiver


C Center axis of receiver

#### **Electrical connection**

#### **Connection 1** POWER Signal IN Function Signal OUT Voltage supply Type of connection Connector Thread size M12 Male Туре Material Metal 5 -pin No. of pins Encoding A-coded

#### Pin Pin assignment

1 2	VIN IO1	
3	GND	<u> </u>
4	IO2	
5	FE/SHIELD	4



#### **Connection 2**

Connection 2	BUS	
Function	BUS IN	
Type of connection	Connector	
Thread size	M12	
Туре	Female	
Material	Metal	
No. of pins	4 -pin	
Encoding	D-coded	

Pin	Pin assignment	
1	TD+	
2	RD+	
3	TD-	
4	RD-	

### **Operation and display**

LED		Display	Meaning	
1 AU	JT	Off	Operating mode not active	
		Green, continuous light	Operating mode "Automatic"	
2 MA	AN	Off	Operating mode not active	
		Green, continuous light	Operating mode "Manual"	
AD	J	Off	Operating mode not active	
		Green, continuous light	Operating mode "Adjust"	
l LA	S	Off	Operating mode not active	
		Green, continuous light	Operating mode "Alignment-laser mounting support"	
5 LLC	.c	Off	Operating mode not active	
		Green, continuous light	LLC without interruption	
		Red, continuous light	LLC interrupted at least once	
5 PW	PWR	Off	No supply voltage	
		Green, flashing	Device ok, initialization phase	
		Green, continuous light	Data transmission active	
		Red, flashing	Data transmission interrupted	
		Red, continuous light	Device error	
т тм	/IP	Off	Operating temperature OK	
		Orange, continuous light	Operating temperature critical	

## Leuze

#### **Operation and display**

## Leuze

LEC	C	Display	Meaning	
7	ТМР	Red, continuous light	Operating temperature exceeded or not met	
8	LSR	Off	With function reserve	
		Orange, continuous light	Device OK, warning set	
9	MAS	Off	Installation on slave side	
		Green, continuous light	Installation on master side	
10	OLK	Off	Fault	
		Green, continuous light	No data transmission	
		Orange, continuous light	Data transmission active	
11	11 ERL	Off	Link OK	
		Orange, continuous light	Missing link (Ethernet cable connection) on the second device	
		Red, continuous light	No cable-connected link to the connected device	
12	LINK	Off	No cable-connected link to the connected device	
		Green, continuous light	Link OK	
		Orange, continuous light	Data transmission active	
	SIGNAL QUALITY	2 red, 2 orange and 4 green	Received signal level	

#### Suitable receivers

 Part no.	Designation	Article	Description
50151305	DDLS 538 120.3 L W S3	Optical data transmission	Special version: Operation of parallel light axes, Integrated laser alignment aid, Not influenced by reflective surfaces, Wide angle version Working range: 100 120,000 mm Transmission frequency: F3 Interface: EtherCAT link down 70 ms Connection: Connector, M12

#### Part number code

Part designation: DDLS 5XXX YYY.Z A B CC

DDLS	Optical transceiver for digital data transmission
5XXX	Series 508i: without integrated web server for remote diagnostics 508i: with integrated web server for remote diagnostics 538: without integrated web server for remote diagnostics (EtherCAT) 548i: with integrated web server for remote diagnostics
YYY	Range for data transmission in m
Z	Frequency of the transmitter 0: Frequency F0 1: Frequency F1 2: Frequency F2 3: Frequency F3 4: Frequency F4
Α	<b>Option</b> L: integrated laser alignment aid (for transmitter/receiver) n/a: standard
В	Special equipment H: with heating n/a: no special equipment
сс	Special equipment W: Transmission optics with larger beam spread S3: Optimized for EtherCAT transmission n/a: no special equipment

 ${}^{t\!\!\!\!b}$  A list with all available device types can be found on the Leuze website at www.leuze.com.


#### Notes

## Leuze

#### Observe intended use!

✤ This product is not a safety sensor and is not intended as personnel protection.

b The product may only be put into operation by competent persons.



Do not expose users of telescopic optics!			
The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of <b>laser class 1M</b> as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.			
∜ Do not expose users of telescopic optics!			
The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of <b>laser class 1M</b> as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.			
b Looking into the beam path for extended periods using telescope optics may damage the eye's retina. Never look using telescope optics into the beam or in the direction of reflecting beams.			
ScAUTION! The use of operating and adjusting devices other than those specified here or the carrying out of differing procedures may lead to dangerd exposure to radiation!			
The use of optical instruments or devices (e.g., magnifying glasses, binoculars) in combination with the device increases the danger of eye damage.			
$\stackrel{\text{\tiny (b)}}{\to}$ Observe the applicable statutory and local laser protection regulations.			
to The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device.			
Repairs must only be performed by Leuze electronic GmbH + Co. KG.			

#### ATTENTION! LASER RADIATION – CLASS 1 LASER PRODUCT (alignment laser)

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of **laser class 1** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.

<sup>th</sup> The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.

- ♦ Observe the applicable statutory and local laser protection regulations.
- <sup>t</sup> The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device.

Repairs must only be performed by Leuze electronic GmbH + Co. KG.

#### Accessories

## Leuze

### Connection technology - Connection cables

	Part no.	Designation	Article	Description
Ŵ	50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC
Ŵ	50135074	KS ET-M12-4A-P7- 050	Connection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

### Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50137078	KSS ET-M12-4A- M12-4A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

#### Connection technology - Connectors

	Part no.	Designation	Article	Description
-	50020501	KD 095-5A	Connector	Connection: Connector, M12, Axial, Female, A-coded, 5 -pin
	50112155	S-M12A-ET	Connector	Suitable for interface: Ethernet Connection: Connector, M12, Axial, Male, D-coded, 4 -pin

#### Accessories

## Leuze

#### Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
6	✤ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.