

Technical data sheet Throughbeam photoelectric sensor receiver

Part no.: 50143279

LE46C/2N



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Further information
- Accessories













Technical data



Basic data

Series	46C
Operating principle	Throughbeam principle
Device type	Receiver
Optical data	
Operating range	see transmitter
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U _B	10 30 V, DC, Incl. residual ripple
Residual ripple	0 15 %, From U _B
Open-circuit current	0 20 mA
Outputs	
Number of digital switching outputs	2 Piece(s)
Switching outputs	
Type	Digital switching output
Voltage type	DC
Switching current, max.	100 mA
Switching voltage	high: ≥(U _B -2V)
	low: ≤ 2 V
Switching output 1	Transistar NDN
Switching element Switching principle	Transistor, NPN Light switching
Switching principle	Light Switching
Switching output 2	
Switching element	Transistor, NPN
Switching principle	Dark switching
Time behavior	
Switching frequency	500 Hz
Response time	1 ms

Mechanical data

Dimension (W x H x L)	20.5 mm x 76.3 mm x 44 mm
Housing material	Plastic
Plastic housing	PC-PBT
Lens cover material	Plastic / PMMA
Net weight	100 g
Housing color	Red
Type of fastening	Through-hole mounting
	Via optional mounting device
Recommended tightening torque for M3 fastening	0.9 N·m
Recommended tightening torque for M4 fastening	1.4 N·m
Compatibility of materials	ECOLAB
Operation and display	

Type of display

Type of display	LED
Number of LEDs	3 Piece(s)

Environmental data

Ambient temperature, operation	-40 60 °C	
Ambient temperature, storage	-40 70 °C	

Certifications

Degree of protection	IP 67
	IP 69K
Protection class	III
Approvals	c UL US
Standards applied	IEC 60947-5-2

Classification

Customs tariff number	85365019	
ECLASS 5.1.4	27270901	
ECLASS 8.0	27270901	
ECLASS 9.0	27270901	
ECLASS 10.0	27270901	
ECLASS 11.0	27270901	
ECLASS 12.0	27270901	
ECLASS 13.0	27270901	
ECLASS 14.0	27270901	
ECLASS 15.0	27270901	
ETIM 5.0	EC002716	
ETIM 6.0	EC002716	
ETIM 7.0	EC002716	
ETIM 8.0	EC002716	
ETIM 9.0	EC002716	
ETIM 10.0	EC002716	

Switching frequency	500 Hz
Response time	1 ms
Readiness delay	300 ms

Connection

Number of connections	1 Piece(s)


Connection 1

Connection 1	
Function	Signal OUT
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm²

Dimensioned drawings

Leuze

All dimensions in millimeters

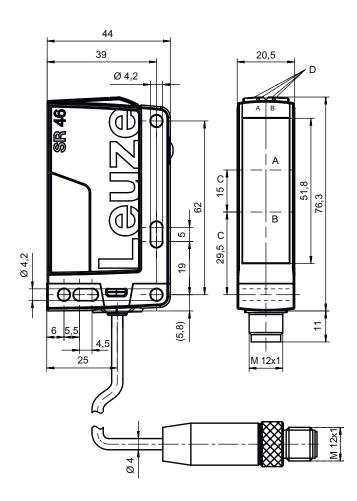

- Receiver
- Yellow LED
- Optical axis
- DA Green LED
- DB Yellow LED

Electrical connection

Connection 1

Function	Signal OUT
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm ²

Conductor color


Conductor assignment

Brown	V+	
White	OUT 2	
Blue	GND	
Black	OUT 1	


Diagrams

Leuze

Typ. response behavior

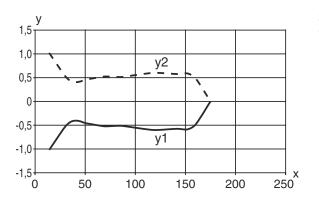

- Distance [m]
- Misalignment [m]



Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
2	Yellow, continuous light	Light path free
	Yellow, flashing	No function reserve
3	Yellow, continuous light (alignment display behind lens cover)	Light path free
	Yellow, flashing (alignment display behind lens cover)	Light path free, minimum function reserve

Suitable transmitters

	Part no.	Designation	Operating range Operating range limit	Description
The same of the sa	50127043	LS46C	0.5 120 m 0 150 m	Operating range limit: 0 150 m Light source: LED, Red Supply voltage: DC Connection: Cable, 2,000 mm, 4 -wire

Part number code

Part designation: AAA46C d EE-f.GG H/i J-K

AAA46C	Operating principle / construction HT46C: Diffuse reflection sensor with background suppression LS46C: Throughbeam photoelectric sensor transmitter LE46C: Throughbeam photoelectric sensor receiver PRK46C: Retro-reflective photoelectric sensor with polarization filter RK46C: Retro-reflective photoelectric sensor
d	Light type n/a: red light I: infrared light

Part number code



ΕE Light source n/a: I FD

L1: laser class 1 L2: laser class 2

Preset range (optional)

n/a: operating range acc. to data sheet

xxxF: Preset range [mm]

GG Equipment

n/a: standard

1: 270° potentiometer

8: activation input (activation with high signal)

01: diffuse reflection sensor with background suppression (HT): HG tape (HighGain tape) is not detected from a distance of 900 mm with a set

operating range of ≤ 450 mm (diffuse reflection: 6%, black)

D: Depolarizing media

E: Diffuse reflection sensor with background suppression (HT): optimized for dusty environments SL: Diffuse reflection sensor with background suppression (HT): slit diaphragm 25 mm x 3 mm

P: throughbeam photoelectric sensor receiver (LE): edge filter for parallel operation

L: Light-band

XL: Extra long light spot

Operating range adjustment & version

n/a with diffuse reflection sensor with background suppression (HT): range adjustment via mechanical adjusting spindle

n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable 1: retro-reflective photoelectric sensors (PRK/RK): sensitivity adjustment via potentiometer

3: teach-in via button P2: resolution 2 mm

Switching output/function OUT 1/IN: Pin 4 or black conductor

2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching

L: IO-Link

G: Push-pull switching output, PNP dark switching, NPN light switching 6: push-pull switching output, PNP light switching, NPN dark switching

Switching output / function OUT 2/IN: pin 2 or white conductor

2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching 8: activation input (activation with high signal) 9: deactivation input (deactivation with high signal)

W: warning output X: pin not used

G: Push-pull switching output, PNP dark switching, NPN light switching 6: push-pull switching output, PNP light switching, NPN dark switching

K **Electrical connection**

n/a: cable, standard length 2000 mm, 4-wire

200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug)

M12: M12 connector, 4-pin (plug)

500-M12: cable, length 500 mm with M12 connector, 4-pin, axial (plug) 1000-M12: cable, length 1000 mm with M12 connector, 4-pin, axial (plug)

Note



A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes



Observe intended use!



\$\text{This product is not a safety sensor and is not intended as personnel protection.}

The product may only be put into operation by competent persons.

Only use the product in accordance with its intended use.

We reserve the right to make technical info@leuze.com • www.leuze.com changes

Notes



For UL applications:



- ♦ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- 🖖 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Further information

• Response time: For short decay times, an ohmic load of approx. 5kOhm is recommended

Accessories

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
£ 13	50105315	BT 46	Mounting device	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Rigid Material: Metal

Mounting technology - Rod mounts

•		0,			
	Part no.	Designation	Article	Description	
	50117252	BTU 300M-D12	Mounting system	Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type, Suited for M4 screws Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal	

Note



🔖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.

We reserve the right to make technical changes