

# **Technical data sheet** Stationary bar code reader

Part no.: 50112759

BCL 601i SM 102



#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Accessories











# **Technical data**



Series	BCL 600i
Functions	
Functions	Alignment mode
	AutoConfig
	AutoControl
	AutoReflAct
	Code fragment technology
	LED indicator
	Reference code comparison
Characteristic parameters	
MTTF	93 years
	•
Read data	
Code types, readable	2/5 Interleaved
	Codabar
	Code 128
	Code 39
	Code 93
	EAN 128
	EAN 8/13
	EAN Addendum
	GS1 Databar Expanded
	GS1 Databar Limited
	GS1 Databar Omnidirectional
	UPC
Scanning rate, typical	1,000 scans/s
ar codes per reading gate, max. umber	64 Piece(s)
Optical data	
Reading distance	400 900 mm
	400 900 mm Laser, Blue
ight source	
ight source Navelength	Laser, Blue
Light source Wavelength Laser class	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous
Light source  Wavelength  Laser class  Transmitted-signal shape  Usable opening angle (reading field	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014
Light source  Navelength  Laser class  Fransmitted-signal shape  Jsable opening angle (reading field opening)	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous
Light source Wavelength Laser class Fransmitted-signal shape Usable opening angle (reading field opening) Bar code contrast (PCS)	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous 60 °
Light source  Navelength  Laser class  Fransmitted-signal shape  Usable opening angle (reading field opening)  Bar code contrast (PCS)  Modulus size	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous 60 °
Light source  Navelength  Laser class  Fransmitted-signal shape  Jsable opening angle (reading field opening)  Bar code contrast (PCS)  Modulus size  Reading method	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous 60 ° 60 % 0.25 0.35 mm
Light source  Wavelength  Laser class  Fransmitted-signal shape  Usable opening angle (reading field opening)  Bar code contrast (PCS)  Wodulus size  Reading method  Beam deflection	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous 60 ° 60 % 0.25 0.35 mm Line scanner
Light source  Wavelength  Laser class  Transmitted-signal shape  Usable opening angle (reading field opening)  Bar code contrast (PCS)  Modulus size  Reading method  Beam deflection  Light beam exit	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous 60 ° 60 % 0.25 0.35 mm Line scanner Via rotating polygon wheel
Reading distance Light source Wavelength Laser class Transmitted-signal shape Usable opening angle (reading field opening) Bar code contrast (PCS) Modulus size Reading method Beam deflection Light beam exit  Electrical data  Protective circuit	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous 60 ° 60 % 0.25 0.35 mm Line scanner Via rotating polygon wheel
Light source  Wavelength  Laser class  Transmitted-signal shape  Usable opening angle (reading field opening)  Bar code contrast (PCS)  Modulus size  Reading method  Beam deflection  Light beam exit  Electrical data	Laser, Blue 405 nm 2, IEC/EN 60825-1:2014 Continuous 60 ° 60 % 0.25 0.35 mm Line scanner Via rotating polygon wheel Front

Inputs/outputs selectable Output current, max.	60 mA
Number of inputs/outputs selectable	
Voltage type, outputs	DC
Switching voltage, outputs	Typ. U <sub>R</sub> / 0 V
Voltage type, inputs	DC
Switching voltage, inputs	Typ. U <sub>R</sub> / 0 V
Input current, max.	8 mA
•	
terface	
pe	RS 485
RS 485	
Function	Process
Transmission speed	4,800 115,400 Bd
Data format	Adjustable
Start bit	1
Data bit	7, 8, 9 data bits
Stop bit	1, 2 stop bits
Parity	Adjustable
Transmission protocol	Adjustable
Data encoding	ASCII
ervice interface	
pe	USB
USB	
Function	Configuration via software
	Service
onnection	
	5 Piggg(a)
onnection umber of connections	5 Piece(s)
umber of connections	5 Piece(s)
	5 Piece(s)  Service interface
umber of connections  Connection 1  Function	
umber of connections  Connection 1  Function  Type of connection	Service interface
umber of connections  Connection 1  Function  Type of connection  Designation on device	Service interface USB
umber of connections  Connection 1  Function  Type of connection	Service interface USB SERVICE
umber of connections  Connection 1  Function  Type of connection  Designation on device	Service interface USB SERVICE
Connection 1 Function Type of connection Designation on device Connector type	Service interface USB SERVICE
Connection 1 Function Type of connection Designation on device Connector type Connection 2	Service interface USB SERVICE USB 2.0 Standard-A
Connection 1 Function Type of connection Designation on device Connector type Connection 2	Service interface USB SERVICE USB 2.0 Standard-A Signal IN
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function Type of connection	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function Type of connection Designation on device Thread size	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Type of connection Designation on device Thread size Type	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded  Signal IN
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded  Signal IN
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded  Signal IN Signal OUT Voltage supply Connector
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded  Signal IN Signal OUT Voltage supply Connector PWR
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded  Signal IN Signal OUT Voltage supply Connector
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3 Function  Type of connection Designation on device	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded  Signal IN Signal OUT Voltage supply Connector PWR
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3 Function  Type of connection Designation on device Thread size	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded  Signal IN Signal OUT Voltage supply Connector PWR M12
Connection 1 Function Type of connection Designation on device Connector type  Connection 2 Function  Type of connection Designation on device Thread size Type Material No. of pins Encoding  Connection 3 Function  Type of connection Designation on device Thread size Type	Service interface USB SERVICE USB 2.0 Standard-A  Signal IN Signal OUT Connector SW IN/OUT M12 Male Metal 5 -pin A-coded  Signal IN Signal OUT Voltage supply Connector PWR M12 Female

# **Technical data**



Connection 4	
Function	BUS IN
Type of connection	Connector
Designation on device	HOST / BUS IN
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	B-coded
Composition F	
Connection 5	DUIC OUT
Function	BUS OUT
Type of connection	Connector
Designation on device	BUS OUT
Thread size	M12
Туре	Male
No. of pins	5 -pin

#### **Mechanical data**

Design	Cubic
Dimension (W x H x L)	123.5 mm x 63 mm x 106.5 mm
Housing material	Metal
Metal housing	Diecast aluminum
Lens cover material	Glass
Net weight	1,100 g
Housing color	Red
	Silver
Type of fastening	Dovetail grooves
	Mounting thread
	Via optional mounting device

#### Operation and display

Type of display	LED
	Monochromatic graphical display, 128x64 pixel, with background lighting
Number of LEDs	2 Piece(s)
Type of configuration	Via web browser
Operational controls	Button(s)

#### **Environmental data**

Ambient temperature, operation	0 40 °C
Ambient temperature, storage	-20 +70 °C
Relative humidity (non-condensing)	90 %
Extraneous light tolerance on the bar code, max.	2,000 lx

#### Certifications

Degree of protection	IP 65
Protection class	III
Approvals	c UL US
Test procedure for EMC in accordance	EN 55022
with standard	EN 61000-4-2, -3, -4, -6
Test procedure for shock in accordance with standard	IEC 60068-2-27, test Ea
Test procedure for continuous shock in accordance with standard	IEC 60068-2-29, test Eb
Test procedure for vibration in accordance with standard	IEC 60068-2-6, test Fc

#### Classification


info@leuze.com • www.leuze.com


Customs tariff number	84719000
ECLASS 5.1.4	27280102
ECLASS 8.0	27280102
ECLASS 9.0	27280102
ECLASS 10.0	27280102
ECLASS 11.0	27280102
ECLASS 12.0	27280102
ECLASS 13.0	27280102
ECLASS 14.0	27280102
ECLASS 15.0	27280102
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550
ETIM 8.0	EC002550
ETIM 9.0	EC002550
ETIM 10.0	EC002550


# **Dimensioned drawings**

All dimensions in millimeters







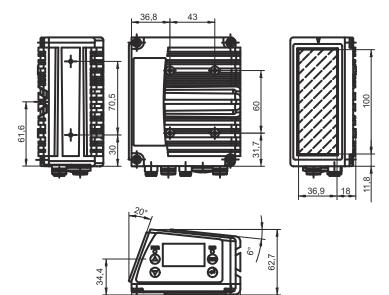

# **Electrical connection**

Connection 1	SERVICE
	CERTICE

104,2

Function	Service interface
Type of connection	USB
Connector type	USB 2.0 Standard-A

Pin	Pin assignment
1	+5 V DC
2	DATA-
3	DATA+
4	GND


info@leuze.com • www.leuze.com

# **Electrical connection**




Connection 2	SW IN/OUT	
Function	Signal IN	
	Signal OUT	
Type of connection	Connector	
Thread size	M12	
Туре	Male	
Material	Metal	
No. of pins	5 -pin	
Encoding	A-coded	

Pin	Pin assignment
1	VOUT
2	SWIO 1
3	GND
4	SWIO 2
5	FE




Connection 3	PWR
Function	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment					
1	VIN					
2	SWIO 3					
3	GND					
4	SWIO 4					
5	FE					



Connection 4	HOST / BUS IN
Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	B-coded

Pin	Pin assignment				
1	Res.				
2	RS 485 B				
3	GND 485				
4	RS 485 A				
5	FE				




### **Electrical connection**



Connection 5	BUS OUT	
Function	BUS OUT	
Type of connection	Connector	
Thread size	M12	
Туре	Male	
Material	Metal	
No. of pins	5 -pin	
Encoding	B-coded	


Pin	Pin assignment
1	V CC485
2	RS 485 B
3	GND 485
4	RS 485 A
5	FE



6/10

# **Diagrams**

Reading field curve - Medium Density

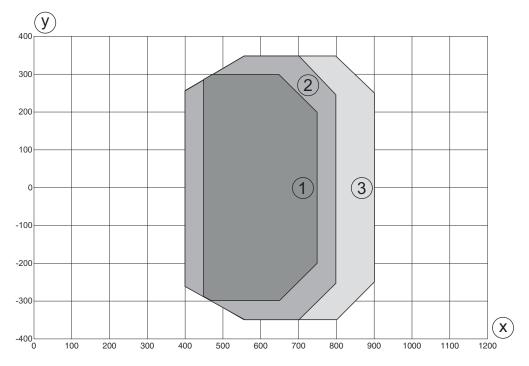


- y Reading field width [mm]
- x Reading field distance [mm]
- 1 Module = 0.25 mm: 450 mm 750 mm (300 mm depth of field)
- 2 Module = 0.3 mm: 400 mm 800 mm (400 mm depth of field)
- 3 Module = 0.35 mm: 400 mm 900 mm (500 mm depth of field)

# **Diagrams**



# Reading field curve - Medium Density

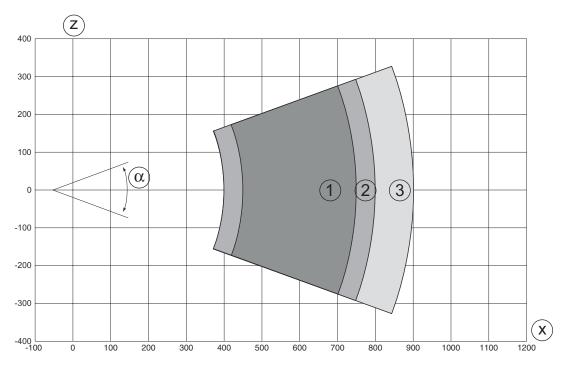

- Reading field height [mm]
- Reading field distance [mm]
- Module = 0.25 mm: 450 mm 750 mm (300 mm depth of field)
- Module = 0.3 mm: 400 mm 800 mm (400 mm depth of field)
- Module = 0.35 mm: 400 mm 900 mm (500 mm depth of field)

# **Operation and display**

LED	Display	Meaning
1 PWR	Off	No supply voltage
	Green, flashing	Initialization
	Green, continuous light	Device OK
	Orange, flashing	Service operation
	Orange, continuous light	Reset
	Red, flashing	Device OK, warning set
	Red, continuous light	Device error
2 NET	Off	No supply voltage
	Green, flashing	BUS initialization
	Green, continuous light	Bus operation ok
	Orange, flashing	Service mode
	Orange, continuous light	Reset
	Red, flashing	Communication error
	Red, continuous light	Network error

info@leuze.com • www.leuze.com

#### Part number code



Part designation: BCL XXXX YYZ AAA B

BCL	Operating principle BCL: bar code reader
XXXX	Series/interface (integrated fieldbus technology) 600i: RS 232/RS 422/ RS 485 (multiNet master) 601i: RS 485 (multiNet slave) 604i: PROFIBUS DP 608i: Ethernet 648i: PROFINET 658i: EtherNet/IP
YY	Scanning principle S: line scanner (single line) O: oscillating-mirror scanner (oscillating mirror)
Z	Optics N: High Density (close) M: Medium Density (medium distance) F: Low Density (remote) L: Long Range (very large distances)
AAA	Beam exit 100: lateral 102: front
ВВ	Special equipment H: with heating

#### Note



A list with all available device types can be found on the Leuze website at www.leuze.com.

#### **Notes**



#### Observe intended use!



- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- by Only use the product in accordance with its intended use.

#### ATTENTION! LASER RADIATION - CLASS 2 LASER PRODUCT



#### Do not stare into beam!

The device satisfies the requirements of IEC/EN 60825-1:2014 safety regulations for a product of laser class 2 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 56 from May 08, 2019.

- 🦫 Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- ♥ Do not point the laser beam of the device at persons!
- 🖖 Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- 🔖 CAUTION! The use of operating and adjusting devices other than those specified here or the carrying out of differing procedures may lead to dangerous exposure to radiation!
- \$ The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

We reserve the right to make technical changes

#### Notes



#### **NOTE**



#### Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- "Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- 🌣 Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- 🔖 Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

### **Accessories**

# Connection technology - Connection cables

Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

# Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
 0.0	50107726	KB USB A - USB A	Interconnection cable	Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,800 mm Sheathing material: PVC
	50135254	KDS PB-M12-4A- M12-4A-P3-050	Interconnection cable	Suitable for interface: PROFIBUS DP Connection 1: Connector, M12, Axial, Female, B-coded, 5-pin Connection 2: Connector, M12, Axial, Male, B-coded, 4-pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

# Connection technology - Terminating resistors

Part no.	Designation	Article	Description
50038539	TS 02-4-SA	Terminator plug	Suitable for: MultiNet Plus, PROFIBUS DP Function: Bus termination Connection 1: Connector, M12, Axial, Male, B-coded, 4 -pin

The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2025-04-03

Leuze electronic GmbH + Co. KG

info@leuze.com • www.leuze.com

We reserve the right to make technical changes

### **Accessories**



# Mounting technology - Other

Part no.	Designation	Article	Description
50111224	BT 59	Mounting bracket	Fastening, at system: Groove mounting Mounting bracket, at device: Clampable Material: Metal Shock absorber: No

# Services

	Part no.	Designation	Article	Description
<u>В</u>	S981020	CS30-E-212	Hourly rate	Details: Compilation of the application data, selection and suggestion of suitable sensor system, drawing prepared as assembly sketch.  Conditions: Completed questionnaire or project specifications with a description of the application have been provided.
	S981014	CS30-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours.  Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981019	CS30-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.
<del>      </del>	S981021	CS30-V-212	Hourly rate	Details: REA evaluation with creation of a test report, evaluation of the code quality.  Conditions: Original bar codes to be provided by the client.

#### Note



🖔 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.