



## Technical data

### Basic data

Series	MSI 430
Application	Monitoring of safety functions
Number of safe I/Os	16 IN, 4 OUT, 4 programmable I/O

### Functions

Functions	Additional I/O extensions available (optional) Configurable safety control Configuration via MSI.designer software Ethernet interface Industrial Ethernet protocols (PROFINET, Ethernet/IP, Modbus TCP) on-board Removable program memory (must be ordered separately, part no. 50132996) Transfer of diagnostic data via external fieldbus modules, e.g. MSI-FB-PROFIBUS (optional) USBmini interface
-----------	---

### Characteristic parameters

SIL	3, IEC 61508
SILCL	3, IEC/EN 62061
Performance Level (PL)	Up to and including e, EN ISO 13849-1
PFH <sub>D</sub>	0.000000043 per hour
Mission time T <sub>M</sub>	20 years, EN ISO 13849-1
Category	4, EN ISO 13849

### Electrical data

<b>Performance data</b>	
Supply voltage U <sub>B</sub>	24 V, DC, -30 ... 25 %
Power consumption, max.	3.3 W
<b>Output circuit</b>	
Number of outputs	8 Piece(s)
Max. number of integrated digital outputs	8 Piece(s)
Type of digital output	Transistor
Short circuit protection, outputs	Yes
Min. voltage permitted at the output	16.2 V
Max. voltage permitted at the output	30 V
Output current	4 A
<b>Control circuit</b>	
Number of inputs	16 Piece(s)
Voltage permitted at the input	30 V
Max. rated control supply voltage at DC	30 V
Min. rated control supply voltage at DC	15.6 V
Input current at signal 1	2.3 mA

### Interface

Type	EtherNet IP Internal bus (SBUS+) Modbus TCP PROFINET
------	---

### Service interface

Type	Ethernet, USB
------	---------------

### Ethernet

Function	Configuration via software
----------	----------------------------

### USB

Function	Configuration via software
----------	----------------------------

### Connection

Number of connections	3 Piece(s)
-----------------------	------------

#### Connection 1

Function	Signal IN Signal OUT Voltage supply
----------	---

Type of connection	Terminal
--------------------	----------

Type of terminal	Spring-cage terminal
------------------	----------------------

No. of pins	32 -pin
-------------	---------

#### Connection 2

Function	Configuration interface
----------	-------------------------

Type of connection	USB
--------------------	-----

Connector type	USB 2.0 Mini-A
----------------	----------------

#### Connection 3

Function	BUS OUT
----------	---------

Type of connection	RJ45
--------------------	------

#### Cable properties

Connection cross sections	2 x 0.2 to 1.5 mm <sup>2</sup> , wire 2 x 0.2 to 1.5 mm <sup>2</sup> , wire 2 x 0.25 to 1.5 mm <sup>2</sup> , wire with wire-end sleeve (pressed in trapezium shape)
---------------------------	--

### Mechanical data

Dimension (W x H x L)	45 mm x 107 mm x 121 mm
Net weight	290 g
Housing color	Gray
Type of fastening	Snap-on mounting

### Operation and display

Type of display	LED indicator
-----------------	---------------

Type of configuration	Software
-----------------------	----------

### Environmental data

Ambient temperature, operation	-25 ... 65 °C
--------------------------------	---------------

Ambient temperature, storage	-25 ... 70 °C
------------------------------	---------------

Relative humidity (non-condensing)	10 ... 95 %
------------------------------------	-------------

### Certifications

Degree of protection	IP 20
----------------------	-------

Protection class	III
------------------	-----

Certifications	c UL US
----------------	---------

	TÜV Rheinland
--	---------------

Vibration resistance	5 ... 150 Hz
----------------------	--------------

Test procedure for oscillation in accordance with standard	EN 60068-2-6
--	--------------

Shock resistance, single shock	30 g, 11 ms, EN 60068-2-27
--------------------------------	----------------------------


Shock resistance, continuous shock	10 g, 16 ms, EN 60068-2-29
------------------------------------	----------------------------

# Technical data

Customs tariff number	85371091
ECLASS 5.1.4	27243001
ECLASS 8.0	27243101
ECLASS 9.0	27243101
ECLASS 10.0	27243101
ECLASS 11.0	27243101
ECLASS 12.0	27243101
ETIM 5.0	EC002538
ETIM 6.0	EC002538
ETIM 7.0	EC002538

# Dimensioned drawings

All dimensions in millimeters

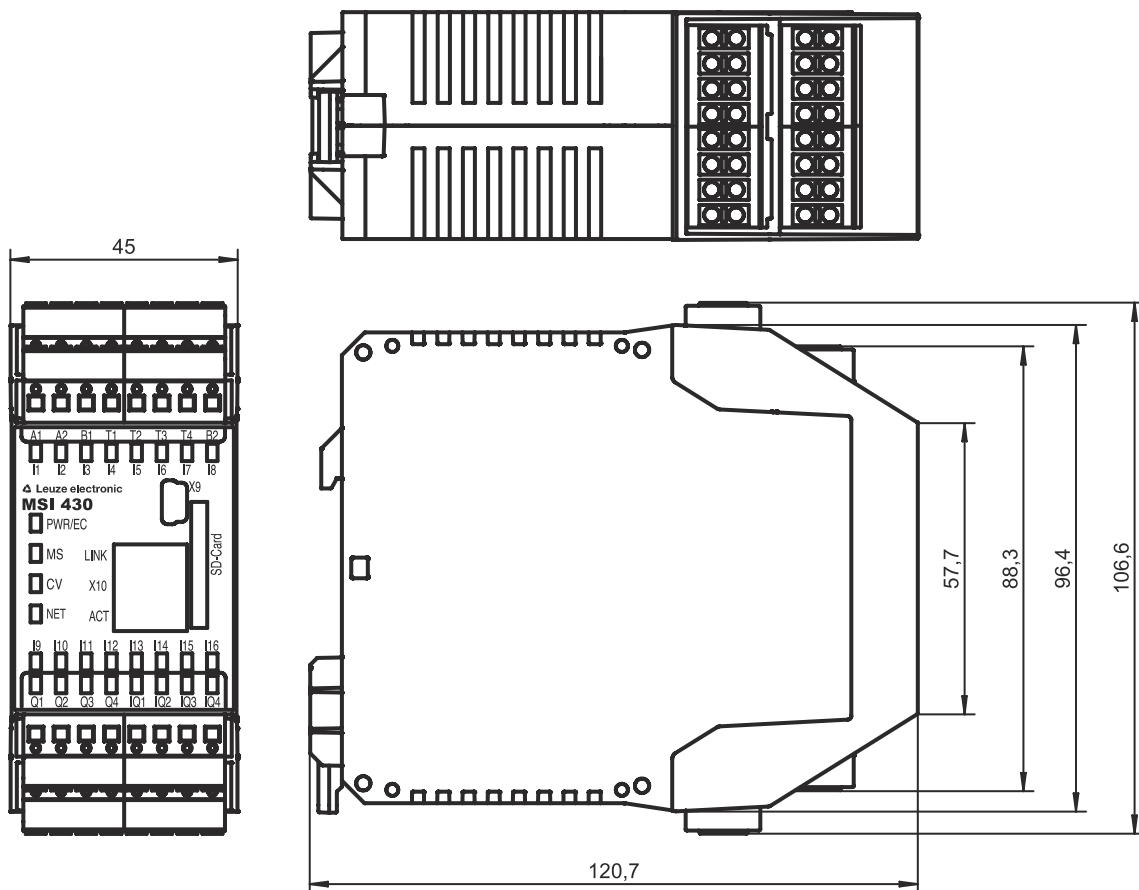

## Electrical connection

### Connection 1

Function	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Terminal
Type of terminal	Spring-cage terminal
No. of pins	32 -pin

Terminal	Assignment
A1	+24V
A2	GND
B1	+24 V (outputs Q1 - Q4)
B2	+24 V (outputs IQ1 - IQ4)
I1	Safe input
I2	Safe input
I3	Safe input
I4	Safe input
I5	Safe input
I6	Safe input
I7	Safe input
I8	Safe input
I9	Safe input
I10	Safe input
I11	Safe input
I12	Safe input
I13	Safe input
I14	Safe input
I15	Safe input
I16	Safe input
IQ1	Safe input/output (configurable)
IQ2	Safe input/output (configurable)
IQ3	Safe input/output (configurable)
IQ4	Safe input/output (configurable)
Q1	Safe output
Q2	Safe output
Q3	Safe output
Q4	Safe output
T1	Test signal output
T2	Test signal output
T3	Test signal output
T4	Test signal output

### Connection 2

### X9


Function	Configuration interface
Type of connection	USB
Connector type	USB 2.0 Mini-A

### Connection 3

### X10

Function	BUS OUT
Type of connection	RJ45

# Circuit diagrams

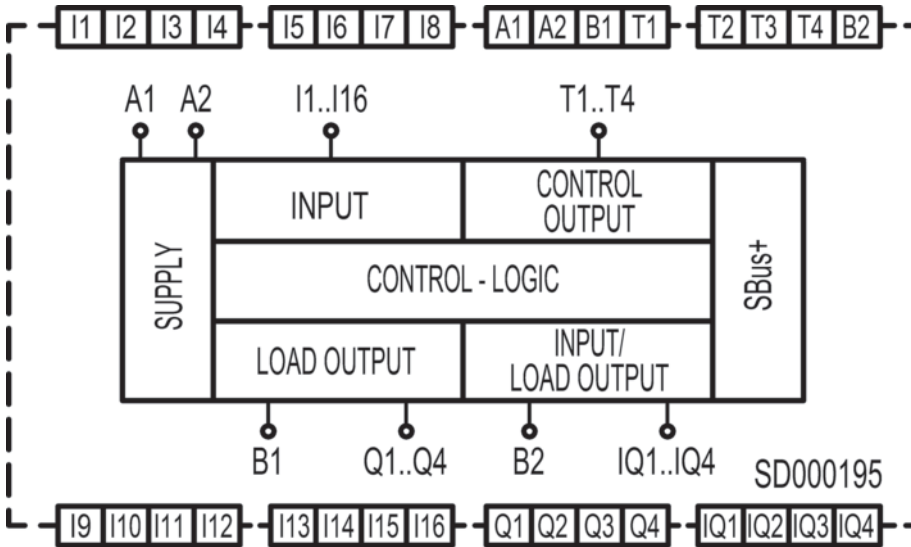

## Notes

**Observe intended use!**

- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.


## Accessories

### Start-up/diagnosis

	Part no.	Designation	Article	Description
	50117011	KB USB A - USB miniB	Service line	Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,500 mm Sheathing material: PVC

# Accessories

## General

	Part no.	Designation	Article	Description
	50132996 *	MSI-SD-CARD	Program memory	
	50133002	MSI-SD-COVER	Cover	Contains: 10x MSI-SD-COVER

\* Necessary accessories, please order separately

## Services

	Part no.	Designation	Article	Description
	S981043	CS40-E-312	Hourly rate	<p>Details: Location and content to be agreed upon.</p> <p>Conditions: Price not including travel costs and, if applicable, accommodation expenses.</p> <p>Restrictions: Travel costs and accommodation expenses charged separately and, if applicable, according to expenditure.</p>
	S981029	CS40-T-110	Product training	<p>Details: Location and content to be agreed upon, duration: max. 10 hours.</p> <p>Conditions: Price not including travel costs and, if applicable, accommodation expenses.</p> <p>Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure. Maximum number of participants: 12 people</p>

### Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.