

## Technical data sheet Stationary 2D-code reader

Part no.: 50135000

DCR50M2/R2

### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Notes
- Accessories



For illustration purposes only



## Technical data

### Basic data

Series	DCR 50
Chip	CMOS (Rolling Shutter)

### Special version

Special version	Scan Engine Module
-----------------	--------------------

### Functions

Software functions	Reading of 1D codes Reading of 2D codes
--------------------	--

### Read data

Code types, readable	2/5 Interleaved Australian Post Aztec Canada Post Codabar Codablock F Code 11 Code 128 Code 32 Code 39 Code 49 Code 93 Data Matrix Code EAN/UPC GS1 Composite GS1 Databar Intelligent Mail Japan Post KIX Code Korea Post Maxicode Micro PDF Micro QR MSI Plessey PDF417 Pharma Code Planet Postnet QR code Telepen UK Royal Mail UPU ID Tags
----------------------	--

### Optical data

Reading distance	30 ... 425 mm
Camera resolution, horizontal	1,280 px
Camera resolution, vertical	960 px
Modulus size	0.127 ... 0.528 mm

### Electrical data

#### Performance data

Supply voltage $U_B$	4.75 ... 5.25 V, DC
Current consumption, max.	300 mA

#### Inputs

Number of digital switching inputs	1 Piece(s)
------------------------------------	------------

### Switching inputs

Type	Digital switching input
------	-------------------------

### Outputs

Number of digital switching outputs	1 Piece(s)
-------------------------------------	------------

### Switching outputs

Type	Digital switching output
Voltage type	DC
Switching current, max.	20 mA

### Switching output 1

Switching element	Transistor, NPN
-------------------	-----------------

### Interface

Type	RS 232
------	--------

### RS 232

Function	Process
Transmission speed	9,600 ... 115,200 Bd
Data format	Adjustable

### Connection

Number of connections	1 Piece(s)
-----------------------	------------

### Connection 1

Function	Configuration interface Data interface Signal IN Signal OUT Voltage supply
Type of connection	Molex connector 53261-0671
No. of pins	6 -pin
Type	Male

### Mechanical data

Design	Cubic
Dimension (W x H x L)	31.6 mm x 12.7 mm x 27.5 mm
Housing material	Metal Plastic
Net weight	10 g
Housing color	Silver
Type of fastening	M2,5 mounting tabs

### Operation and display

Type of display	LED
Type of configuration	Software

### Environmental data


Ambient temperature, operation	0 ... 50 °C
Ambient temperature, storage	-20 ... 60 °C
Relative humidity (non-condensing)	10 ... 90 %

## Technical data

Customs tariff number	84719000
ECLASS 5.1.4	27280103
ECLASS 8.0	27280103
ECLASS 9.0	27280103
ECLASS 10.0	27280103
ECLASS 11.0	27280103
ECLASS 12.0	27280103
ECLASS 13.0	27280103
ECLASS 14.0	27280103
ECLASS 15.0	27280103
ECLASS 16.0	27280103
ETIM 5.0	EC002550
ETIM 6.0	EC002999
ETIM 7.0	EC002999
ETIM 8.0	EC002999
ETIM 9.0	EC002999
ETIM 10.0	EC002999

## Dimensioned drawings

All dimensions in millimeters

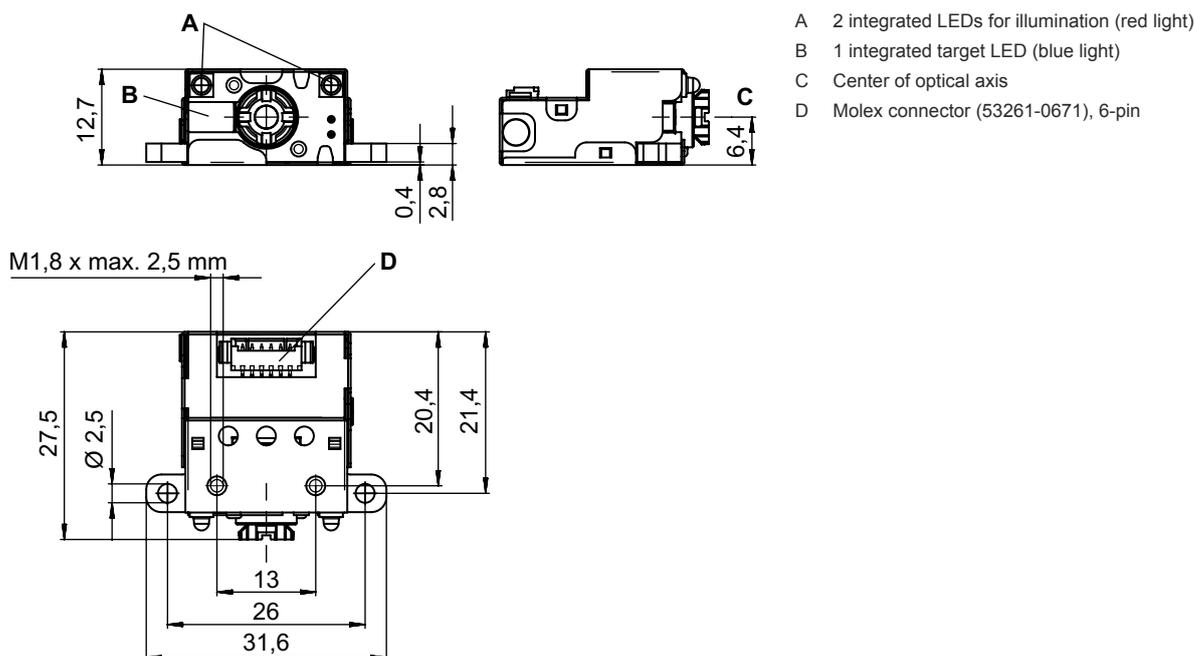

# Electrical connection


## Connection 1

<b>Function</b>	Configuration interface Data interface Signal IN Signal OUT Voltage supply
<b>Type of connection</b>	Molex connector 53261-0671
<b>No. of pins</b>	6 -pin
<b>Type</b>	Male


Pin	Pin assignment
1	V+
2	GND
3	Trigger IN
4	Good read OUT
5	RS 232 TxD
6	RS 232 RxD

## Diagrams

### Vertical opening angle reading field

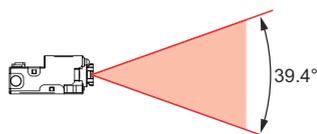

### Horizontal opening angle reading field

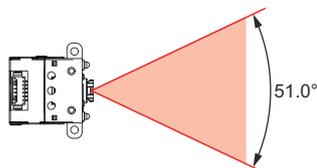

## Reading fields

①	②
Code 39 0,190mm (7,5mil)	50 (2,0) 245 (9,6)
GS1 Databar/ 0,267mm (10,5mil)	35 (1,4) 225 (8,9)
UPQ 0,330mm (13mil)	40 (1,5) 370 (14,6)
PDF417 0,147mm (5,8mil)	85 (3,3) 155 (6,1)
PDF417 0,170mm (6,7mil)	65 (2,6) 175 (6,9)
Data Matrix/ 0,127mm (5mil)	75 (3,0) 90 (3,5)
Data Matrix/ 0,160mm (6,3mil)	70 (2,8) 135 (5,3)
Data Matrix/ 0,254mm (10mil)	50 (2,0) 205 (8,1)
Data Matrix/ 0,528mm (20,8mil)	30 (1,2) 425 (16,7)

- 1 Code type / resolution [m]
- 2 Typical reading distance [mm] ([inch])

## Notes

 <b>Observe intended use!</b>	
	<ul style="list-style-type: none"> <li>⌘ This product is not a safety sensor and is not intended as personnel protection.</li> <li>⌘ The product may only be put into operation by competent persons.</li> <li>⌘ Only use the product in accordance with its intended use.</li> </ul>

## Accessories

### Start-up/diagnosis

	Part no.	Designation	Article	Description
	50128204	MA-CR	Module	Description: Adapter circuit board for laboratory and test purposes Type of interface: RS 232

Note	
	<ul style="list-style-type: none"> <li>⌘ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.</li> </ul>