

Technical data sheet

Fork photoelectric sensor

Part no.: 50146198
GSL08B/1.1-120-M8.3



For illustration purposes only

Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Operation and display
- Part number code
- Notes
- Accessories



Technical data

Basic data

| | |
|----------------------|--------------------------|
| Series | 08B |
| Principle of physics | Optical |
| Application | Detection of small parts |

Characteristic parameters

| | |
|------|-------------|
| MTTF | 547.3 years |
|------|-------------|

Optical data

| | |
|--------------------------|------------------------|
| Light source | Laser, Red |
| Wavelength | 655 nm |
| Laser class | 1, IEC/EN 60825-1:2007 |
| Transmitted-signal shape | Pulsed |

Measurement data

| | |
|-------------------------|---------|
| Repeatability | 0.01 mm |
| Minimum object diameter | 0.1 mm |

Electrical data

| | |
|--------------------|---------------------------------------------------------|
| Protective circuit | Polarity reversal protection Short circuit protected |
|--------------------|---------------------------------------------------------|

Performance data

| | |
|----------------------|------------------------|
| Supply voltage U_B | 10 ... 30 V, DC |
| Residual ripple | 0 ... 15 %, From U_B |
| Open-circuit current | 0 ... 30 mA |
| Switching hysteresis | 20 μ m |

Outputs

| | |
|-------------------------------------|------------|
| Number of digital switching outputs | 1 Piece(s) |
|-------------------------------------|------------|

Switching outputs

| | |
|-------------------------|-----------------------------------------|
| Type | Digital switching output |
| Voltage type | DC |
| Switching current, max. | 100 mA |
| Switching voltage | high: $\geq(U_B-2V)$ low: $\leq 2 V$ |

Switching output 1

| | |
|---------------------|--------------------------------------------------------|
| Assignment | Connection 1, pin 4 |
| Switching element | Transistor, Push-pull |
| Switching principle | IO-Link / light switching (NPN) / dark switching (PNP) |

Time behavior

| | |
|---------------------|----------|
| Switching frequency | 5,000 Hz |
| Response time | 0.1 ms |
| Readiness delay | 150 ms |

Interface

| | |
|------|---------|
| Type | IO-Link |
|------|---------|

IO-Link

| | |
|------------------|------------------------------------------------------------------------------------------------|
| Function | IO-Link operating modes (Standard, Precision, Power, Speed), see IO-Link interface description |
| COM mode | COM2 |
| Profile | Smart sensor profile |
| Min. cycle time | COM2 = 2.3 ms |
| Frame type | 2.2 |
| Specification | V1.1 |
| Device ID | 2524 (0x0009DC) |
| SIO-mode support | Yes |

Connection

| | |
|-----------------------|------------|
| Number of connections | 1 Piece(s) |
|-----------------------|------------|

Connection 1

| | |
|--------------------|------------------------------|
| Function | Signal OUT Voltage supply |
| Type of connection | Connector |
| Thread size | M8 |
| Type | Male |
| Material | Metal |
| No. of pins | 3 -pin |

Mechanical data

| | |
|----------------------------|------------------------|
| Design | Fork |
| Mouth width | 120 mm |
| Mouth depth | 60 mm |
| Dimension (W x H x L) | 12 mm x 144 mm x 90 mm |
| Housing material | Stainless steel |
| Stainless steel housing | V4A |
| Lens cover material | Glass |
| Net weight | 300 g |
| Housing color | Silver |
| Type of fastening | Through-hole mounting |
| Compatibility of materials | ECOLAB |

Operation and display

| | |
|-------------------------------------|------------------------------------------------|
| Type of display | LED |
| Number of LEDs | 1 Piece(s) |
| Operational controls | 270° potentiometer |
| Function of the operational control | Light/dark switching Sensitivity adjustment |

Environmental data

| | |
|--------------------------------|---------------|
| Ambient temperature, operation | -25 ... 60 °C |
|--------------------------------|---------------|

Certifications


| | |
|----------------------|----------------------------------------------------|
| Degree of protection | IP 67 |
| Protection class | III |
| Approvals | c UL US |
| Standards applied | IEC 60947-5-2, DIN EN ISO 1389-1:2016 appendix C,D |

Technical data

| | |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| ECLASS 5.1.4 | 27270909 |
| ECLASS 8.0 | 27270909 |
| ECLASS 9.0 | 27270909 |
| ECLASS 10.0 | 27270909 |
| ECLASS 11.0 | 27270909 |
| ECLASS 12.0 | 27270909 |
| ECLASS 13.0 | 27270909 |
| ECLASS 14.0 | 27270909 |
| ECLASS 15.0 | 27270909 |
| ETIM 5.0 | EC002720 |
| ETIM 6.0 | EC002720 |
| ETIM 7.0 | EC002720 |
| ETIM 8.0 | EC002720 |
| ETIM 9.0 | EC002720 |
| ETIM 10.0 | EC002720 |

Dimensioned drawings

All dimensions in millimeters

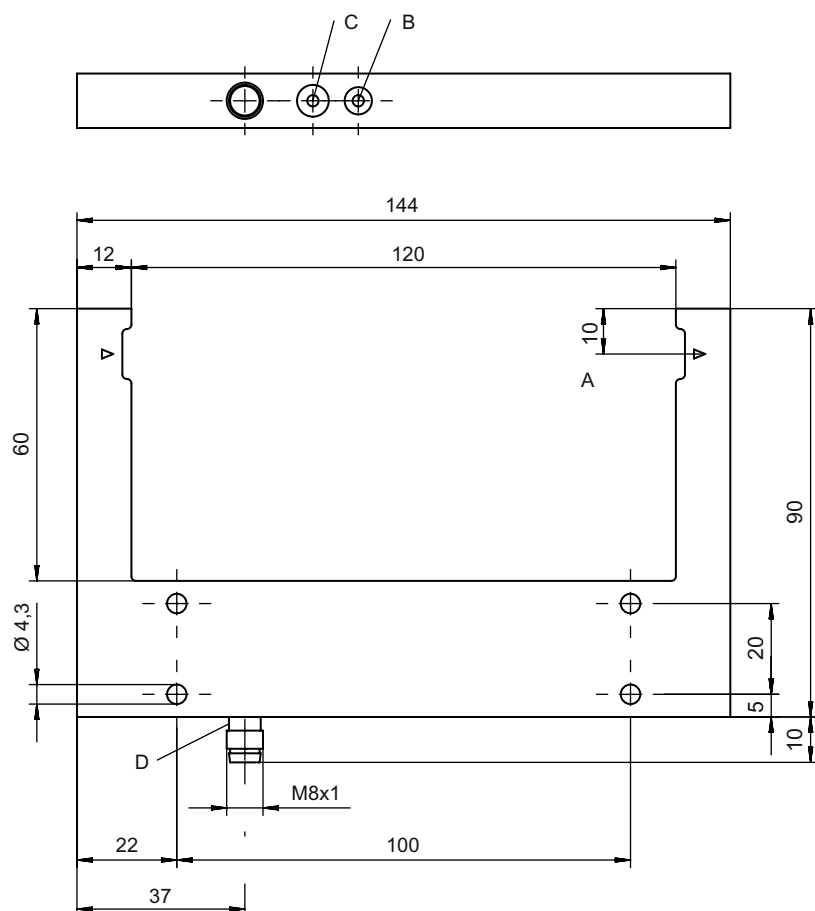

- A Optical axis
- B Sensitivity adjustment
- C Light/dark switching
- D LED indicator

Electrical connection

Connection 1

| | |
|--------------------|----------------|
| Function | Signal OUT |
| | Voltage supply |
| Type of connection | Connector |
| Thread size | M8 |
| Type | Male |
| Material | Metal |
| No. of pins | 3 -pin |

| Pin | Pin assignment |
|-----|----------------|
| 1 | V+ |
| 3 | GND |
| 4 | OUT 1 |



Operation and display

| LED | Display | Meaning |
|-----|--------------------------|-----------------------------------------|
| 1 | Yellow, continuous light | Switching output/switching state active |

Part number code

Part designation: AAA08B/C.D-EEE-FFF

| | |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AAA08B | Operating principle / construction GS08B: Optical fork sensor, LED light source GSL08B: Optical fork sensor, laser light source |
| C | Switching output / Function P: PNP transistor output, dark switching N: NPN transistor output, dark switching 1: IO-Link / light switching (NPN) / dark switching (PNP) |
| D | Equipment 1: 270° potentiometer |
| EEE | Mouth width [mm] Mouth width in millimeters |
| FFF | Electrical connection M8.3: M8 connector, 3-pin (plug) |

| Note | |
|------|--------------------------------------------------------------------------------------------------------------------------------|
| | A list with all available device types can be found on the Leuze website at www.leuze.com . |

Notes

| ⚠ Observe intended use! | |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | <ul style="list-style-type: none"> This product is not a safety sensor and is not intended as personnel protection. The product may only be put into operation by competent persons. Only use the product in accordance with its intended use. |

Notes

| | |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ATTENTION! LASER RADIATION – CLASS 1 LASER PRODUCT | |
| | <p>The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.</p> <ul style="list-style-type: none"> ↳ Observe the applicable statutory and local laser protection regulations. ↳ The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG. |

Accessories

Connection technology - Connection cables

| | Part no. | Designation | Article | Description |
|--|----------|--------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | 50149847 | KD U-M8-3A-T0-050 F+B | Connection cable | Connection 1: Connector, M8, Axial, Female, A-coded, 4 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: TPE |
| | 50130832 | KD U-M8-3A-V1-050 | Connection cable | Connection 1: Connector, M8, Axial, Female, 3 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC |
| | 50130862 | KD U-M8-3W-V1-050 | Connection cable | Connection 1: Connector, M8, Angled, Female, 3 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC |

| Note | |
|------|------------------------------------------------------------------------------------------------------------------------------------|
| | <p>↳ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.</p> |