

## Technical data sheet

### Inductive switch

Part no.: 50109703

ISS 218MM/2NO-8E0-S12

#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Accessories



For illustration purposes only



## Technical data

### Basic data

|                                   |              |
|-----------------------------------|--------------|
| Series                            | 218          |
| type. operating range limit $S_n$ | 8 mm         |
| Operating range $S_a$             | 0 ... 6.4 mm |

### Characteristic parameters

|      |           |
|------|-----------|
| MTTF | 900 years |
|------|-----------|

### Electrical data

|                    |                              |
|--------------------|------------------------------|
| Protective circuit | Inductive protection         |
|                    | Polarity reversal protection |
|                    | Short circuit protected      |

### Performance data

|  |  |
|--|--|
| Supply voltage $U_B$                     | 10 ... 30 V, DC  |
| Residual ripple                          | 0 ... 20 %, From $U_B$   |
| Open-circuit current                     | 0 ... 10 mA  |
| Temperature drift, max. (in % of $S_r$ ) | 10 %, Over the entire operating temperature range  |
| Repeatability, max. (in % of $S_r$ )     | 5 %, For $U_B = 20 ... 30$ VDC, ambient temperature $T_a = 23^\circ\text{C} \pm 5^\circ\text{C}$ |
| Switching hysteresis                     | 10 %   |

### Outputs

|                                     |            |
|-------------------------------------|------------|
| Number of digital switching outputs | 1 Piece(s) |
|-------------------------------------|------------|

### Switching outputs

|                         |            |
|-------------------------|------------|
| Voltage type            | DC         |
| Switching current, max. | 200 mA     |
| Residual current, max.  | 0.1 mA     |
| Voltage drop            | $\leq 2$ V |

### Switching output 1

|                     |                    |
|---------------------|--------------------|
| Switching element   | Transistor, NPN    |
| Switching principle | NO (normally open) |

### Time behavior

|                     |          |
|---------------------|----------|
| Switching frequency | 1,500 Hz |
| Readiness delay     | 60 ms    |

### Connection

|                       |            |
|-----------------------|------------|
| Number of connections | 1 Piece(s) |
|-----------------------|------------|

### Connection 1

|                    |                |
|--------------------|----------------|
| Function           | Signal OUT     |
|                    | Voltage supply |
| Type of connection | Connector      |
| Thread size        | M12            |
| Type               | Male           |
| Material           | Metal          |
| No. of pins        | 4 -pin         |
| Encoding           | A-coded        |

### Mechanical data

|                                |                                 |
|--------------------------------|---------------------------------|
| Design                         | Cylindrical                     |
| Dimension ( $\varnothing$ x L) | 18 mm x 48.5 mm                 |
| Thread size                    | M18 x 1 mm                      |
| Type of installation           | Embedded/flush                  |
| Housing material               | Metal                           |
| Metal housing                  | Nickel-plated brass             |
| Sensing face material          | Plastic, Polybutylene (PBT)     |
| Net weight                     | 43 g                            |
| Housing color                  | Red, RAL 3000                   |
|                                | Silver                          |
| Type of fastening              | Mounting thread                 |
| Standard measuring plate       | 24 x 24 mm <sup>2</sup> , Fe360 |

### Operation and display

|                 |            |
|-----------------|------------|
| Type of display | LED        |
| Number of LEDs  | 1 Piece(s) |

### Environmental data

|                                |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -25 ... 70 °C |
| Ambient temperature, storage   | -25 ... 70 °C |

### Certifications

|  |               |
|--|---------------|
| Degree of protection                               | IP 67         |
| Protection class                                   | II            |
| Approvals  | c UL US       |
| Test procedure for EMC in accordance with standard | IEC 61000-4-2 |
|  | IEC 61000-4-3 |
|  | IEC 61000-4-4 |
| Standards applied                                  | IEC 60947-5-2 |

### Correction factors


|                 |      |
|-----------------|------|
| Aluminum        | 0.35 |
| Stainless steel | 0.7  |
| Copper          | 0.3  |
| Brass           | 0.4  |
| Fe360 steel     | 1    |

### Classification

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| ECLASS 5.1.4          | 27270101 |
| ECLASS 8.0            | 27270101 |
| ECLASS 9.0            | 27270101 |
| ECLASS 10.0           | 27270101 |
| ECLASS 11.0           | 27270101 |
| ECLASS 12.0           | 27274001 |
| ECLASS 13.0           | 27274001 |
| ECLASS 14.0           | 27274001 |
| ECLASS 15.0           | 27274001 |
| ECLASS 16.0           | 27274001 |
| ETIM 5.0              | EC002714 |
| ETIM 6.0              | EC002714 |
| ETIM 7.0              | EC002714 |
| ETIM 8.0              | EC002714 |
| ETIM 9.0              | EC002714 |
| ETIM 10.0             | EC002714 |
| UNSPSC 26.08          | 39122230 |

# Dimensioned drawings

All dimensions in millimeters

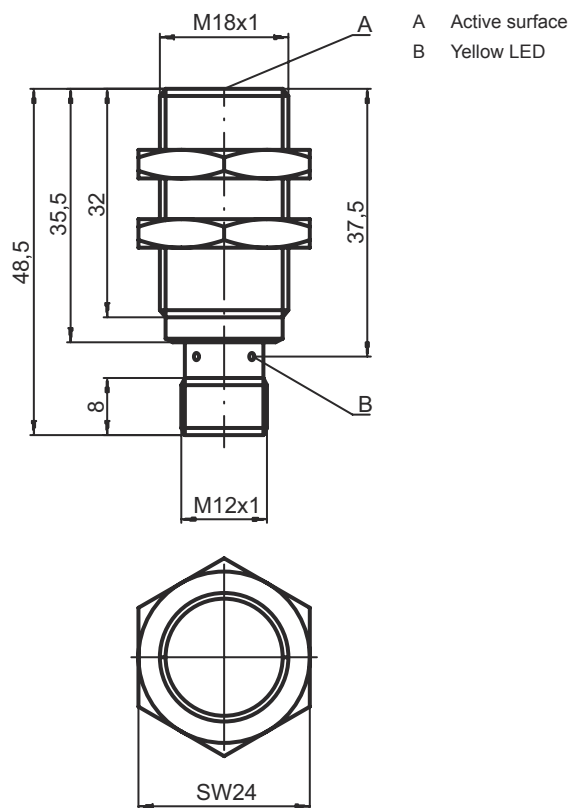


## Electrical connection

### Connection 1


|                           |                              |
|---------------------------|------------------------------|
| <b>Function</b>           | Signal OUT<br>Voltage supply |
| <b>Type of connection</b> | Connector                    |
| <b>Thread size</b>        | M12                          |
| <b>Type</b>               | Male                         |
| <b>Material</b>           | Metal                        |
| <b>No. of pins</b>        | 4 -pin                       |
| <b>Encoding</b>           | A-coded                      |

| Pin | Pin assignment |
|-----|----------------|
| 1   | V+             |
| 2   | n.c.           |
| 3   | GND            |
| 4   | OUT 1          |




## Diagrams

### Embedded/flush installation

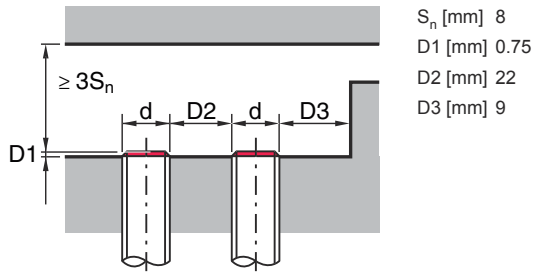

### Types with $S_n = 8.0$ mm

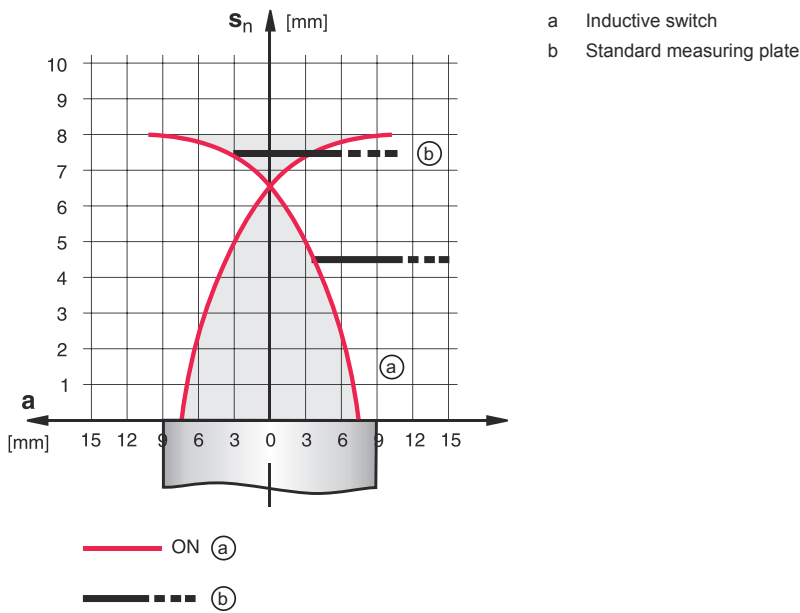

## Operation and display

| LED | Display                  | Meaning                          |
|-----|--------------------------|----------------------------------|
| 1   | Yellow, continuous light | Switching output/switching state |

## Part number code

Part designation: **ISX** YYY ZZ/AAA.BB-CCC-DDD-DDD

| ISX | Operating principle / construction   |
|-----|--|
|     | IS: inductive switch, standard design<br>ISS: inductive switch, short construction |

## Part number code

|            |   |
|------------|---|
| <b>YYY</b> | <p><b>Series</b></p> <p>203: series with Ø 3 mm<br/>                 204: series with Ø 4 mm<br/>                 205: series with M5 x 0.5 external thread<br/>                 206: series with Ø 6.5 mm<br/>                 208: series with M8 x 1 external thread<br/>                 212: series with M12 x 1 external thread<br/>                 218: series with M18 x 1 external thread<br/>                 230: series with M30 x 1.5 external thread<br/>                 240: series in cubic design<br/>                 244: series in cubic design<br/>                 255: series with 5 x 5 mm<sup>2</sup> cross section<br/>                 288: series with 8 x 8 mm<sup>2</sup> cross section</p>   |
| <b>ZZ</b>  | <p><b>Housing / thread</b></p> <p>MM: metal housing (active surface: plastic) / metric thread<br/>                 FM: Full-metal housing (active surface: stainless steel AISI 316L) / metric thread<br/>                 MP: metal housing (active surface: plastic) / smooth (without thread)<br/>                 .2: New version</p>   |
| <b>AAA</b> | <p><b>Output current / supply</b></p> <p>4NO: PNP transistor, NO contact<br/>                 4NC: PNP transistor, NC contact<br/>                 2NO: NPN transistor, NO contact<br/>                 2NC: NPN transistor, NC contact<br/>                 1NO: relay, NO contact / AC/DC<br/>                 1NC: Relay, NC contact / AC/DC<br/>                 44: 2 PNP transistor switching outputs, antivalent (NO + NC)<br/>                 22: 2 NPN transistor switching outputs, antivalent (NO + NC)<br/>                 L: IO-Link interface<br/>                 X: pin not used</p>  |
| <b>BB</b>  | <p><b>Special equipment</b></p> <p>n/a: no special equipment<br/>                 5F: Food version<br/>                 5: housing material V2A (1.4305, AISI 303)</p>  |
| <b>CCC</b> | <p><b>Measurement range / type of installation</b></p> <p>1E0: typ. range limit 1.0 mm / embedded/flush installation<br/>                 1E5: typ. range limit 1.5 mm / embedded/flush installation<br/>                 2E0: typ. range limit 2.0 mm / embedded/flush installation<br/>                 3E0: typ. range limit 3.0 mm / embedded/flush installation<br/>                 4E0: typ. range limit 4.0 mm / embedded/flush installation<br/>                 5E0: typ. range limit 5.0 mm / embedded/flush installation<br/>                 6E0: typ. range limit 6.0 mm / embedded/flush installation<br/>                 8E0: typ. range limit 8.0 mm / embedded/flush installation<br/>                 10E: typ. range limit 10.0 mm / embedded/flush installation<br/>                 12E: typ. range limit 12.0 mm / embedded/flush installation<br/>                 15E: typ. range limit 15.0 mm / embedded/flush installation<br/>                 20E: typ. range limit 20.0 mm / embedded/flush installation<br/>                 22E: typ. range limit 22.0 mm / embedded/flush installation<br/>                 2N5: typ. range limit 2.5 mm / non-embedded/non-flush installation<br/>                 4N0: typ. range limit 4.0 mm / non-embedded/non-flush installation<br/>                 8N0: typ. range limit 8.0 mm / non-embedded/non-flush installation<br/>                 10N: typ. range limit 10.0 mm / non-embedded/non-flush installation<br/>                 12N: typ. range limit 12.0 mm / non-embedded/non-flush installation<br/>                 14N: typ. range limit 14.0 mm / non-embedded/non-flush installation<br/>                 15N: typ. range limit 15.0 mm / non-embedded/non-flush installation<br/>                 20N: typ. range limit 20.0 mm / non-embedded/non-flush installation<br/>                 22N: typ. range limit 22.0 mm / non-embedded/non-flush installation<br/>                 25N: typ. range limit 25.0 mm / non-embedded/non-flush installation<br/>                 40N: typ. range limit 40.0 mm / non-embedded/non-flush installation</p> |
| <b>DDD</b> | <p><b>Electrical connection</b></p> <p>n/a: cable, standard length 2000 mm<br/>                 S12: M12 connector, 4-pin, axial<br/>                 200-S12: cable, length 200 mm with M12 connector, 4-pin, axial<br/>                 200-S8.3: cable, length 200 mm with M8 connector, 3-pin, axial<br/>                 S8.3: M8 connector, 3-pin, axial<br/>                 005-S8.3: cable, length 500 mm with M8 connector, 3-pin, axial<br/>                 050: cable, standard length 5000 mm, 3-wire</p>   |

**Note**



A list with all available device types can be found on the Leuze website at [www.leuze.com](http://www.leuze.com).

# Notes

**⚠ Observe intended use!**

⚠ This product is not a safety sensor and is not intended as personnel protection.  
 ⚠ The product may only be put into operation by competent persons.  
 ⚠ Only use the product in accordance with its intended use.

**⚠ For UL applications:**

⚠ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).


## Accessories

### Connection technology - Connection cables

|  | Part no. | Designation        | Article          | Description   |
|--|----------|--------------------|------------------|---|
|  | 50130654 | KD U-M12-4A-P1-020 | Connection cable | Application: Oil and lubricant resistant<br>Connection 1: Connector, M12, Axial, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 2,000 mm<br>Sheathing material: PUR |
|  | 50130657 | KD U-M12-4A-P1-050 | Connection cable | Application: Oil and lubricant resistant<br>Connection 1: Connector, M12, Axial, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PUR |
|  | 50130648 | KD U-M12-4A-V1-020 | Connection cable | Application: Chemical resistant<br>Connection 1: Connector, M12, Axial, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 2,000 mm<br>Sheathing material: PVC          |
|  | 50130688 | KD U-M12-4W-V1-020 | Connection cable | Application: Chemical resistant<br>Connection 1: Connector, M12, Angled, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 2,000 mm<br>Sheathing material: PVC         |

## Accessories

### Mounting technology - Other

|  | Part no. | Designation | Article | Description   |
|--|----------|-------------|---------|---|
|  | 50111501 | MC 018K     | Clamp   | Diameter, inner: 18 mm<br>Design of mounting device: Mounting clamp<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Clampable<br>Type of mounting device: Rigid<br>Material: Plastic |

#### Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.