

Hoja técnica

Información sobre la serie de encoders

Código: 90000110

EI30-M 058 CL

Contenido

- Datos técnicos
- Código de producto



La figura puede variar

Encoder_Serie	EI 058 CL
Encoder_Principio básico	incremental
Encoder_Principio de funcionamiento	magnético
Encoder_Diámetro de la brida	Ø 58 mm
Encoder_Tipo de brida	Brida de sujeción
Encoder_Eje macizo/Eje hueco	Eje hueco
Encoder_Diámetro del eje	Ø 10 mm
	Ø 6 mm
	Ø 8 mm
Encoder_Tensión de alimentación	4,75 ... 30 V CC
Encoder_Conmutación de salida	HTL (TTL con 5 V CC)
	HTL, inv. (compatible con TTL/RS422 con 5 V CC)
Encoder_Número de impulsos	1 ... 16384 imp./rev.

Datos técnicos

Encoder EI30 M 058 CL

Resolution

Pulses per revolution PPR	1 PPR up to 16384 PPR
---------------------------	-----------------------

Mechanical Data

Flange	clamping flange
Flange material	aluminum
Housing material	Stainless steel or die cast aluminum, powder coated (only M16 and M23 plugs)
Flange diameter	Ø 58 mm [Ø 2.283"]
Cam mounting	pitch 69 mm [2.717 inches]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature

Shaft	Ø 6 mm [Ø 0.236"]
	Attention: No option IP = full IP67 version
Shaft length	L: 12 mm [0.472"]
Max. Permissible shaft loading radial	125 N [12.746 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Shaft	Ø 8 mm [Ø 0.315"]
	Attention: No option IP = full IP67 version
Shaft length	L: 19 mm [0.748"]
Max. Permissible shaft loading radial	125 N [12.746 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Shaft	Ø 9.525 mm [Ø 3/8"] Order No: 4Z
	Attention: No option IP = full IP67 version
Shaft length	L: 20 mm [0.787"]
Max. Permissible shaft loading radial	220 N [22.433 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 20 mm [0.787"]
Max. Permissible shaft loading radial	220 N [22.433 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Bearings

Bearings type	2 precision ball bearings
Nominal service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	8000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	2200 a
Mission time (TM)	25 a
Nominal service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 8000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4.75 VDC up to 30 VDC: typ. 40 mA
Operating principle	magnetic
Output circuit	HTL (TTL at 5 VDC) HTL, inv. (TTL/RS422 comp. at 5 VDC)
Pulse frequency	HTL up to 16384 ppr: max. 600 kHz TTL up to 16384 ppr: max. 1 MHz
Channels	B N and inverted signals
Load	max. 40 mA / channel
Circuit protection	yes

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	50 % ± max. 7 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany


General Data

Weight	approx. 250 g [8.818 oz]
Connections	cable or connector outlet
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65
Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C (Option LT: -40 °C up to +85 °C). Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F, Option LT: -40 °F up to +185 °F
Storage temperature	Connector: -40 °C up to +85 °C, Cable: -30 °C up to +80 °C (Option LT: -40 °C up to +85 °C) Connector: -40 °F up to +185 °F, cable: -22 °F up to +176 °F, (Option LT: -40 °F up to +185 °F)

Datos técnicos

Encoder EI30 M 058 CL

Cable connection A-C axial with 2 m cable

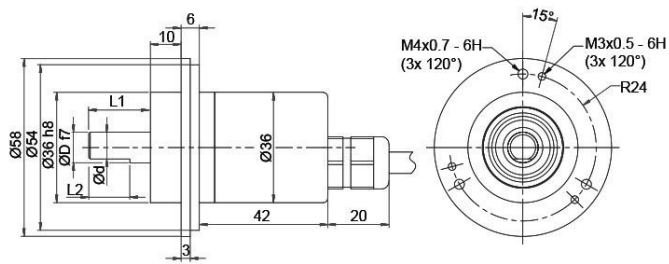


D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

All dimensions in mm

Description	N inv. poss.
A-C axial, shield connected to encoder housing	•

Assignments	A-C	A-C
Circuit	D2	D1
GND	WH	WH
(+) Vcc	BN	BN
A	GN	GN
B	YE	YE
N	GY	GY
—	—	—
A inv.	—	RD
B inv.	—	BK, (BU at LT)
N inv.	—	VT
Shield	flex	flex





Cable connection R-C radial with 2 m cable

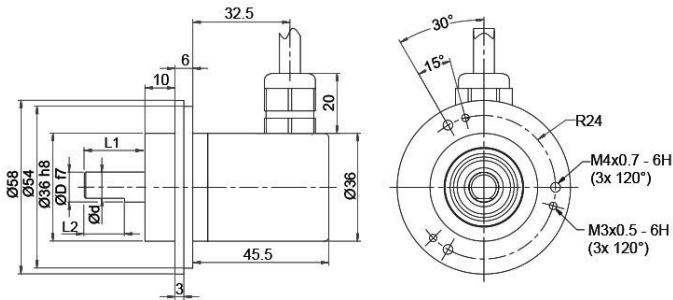

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

All dimensions in mm


	R-IP	R-IP
Circuit	D2	D1
GND	WH	WH
(+) Vcc	BN	BN
A	GN	GN
B	YE	YE
N	GY	GY
–	–	
A inv.	–	RD
B inv.	–	BK

	A5	A6	A8	A8	A12	A12
	5-pin	6-pin	8-pin	8-pin	12-pin	12-pin
						
Circuit	D2	D2	D2	D1	D2	D1
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	5	C	C
—	—	—	—	—	—	—
A inv.	—	—	—	6	—	F
B inv.	—	—	—	7	—	A
N inv.	—	—	—	8	—	D
n. c.	—	5	6, 7, 8	—	A, D, F, G, J	G, J
Shield	—	—	—	—	—	—

Datos técnicos

Encoder EI30 M 058 CL

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

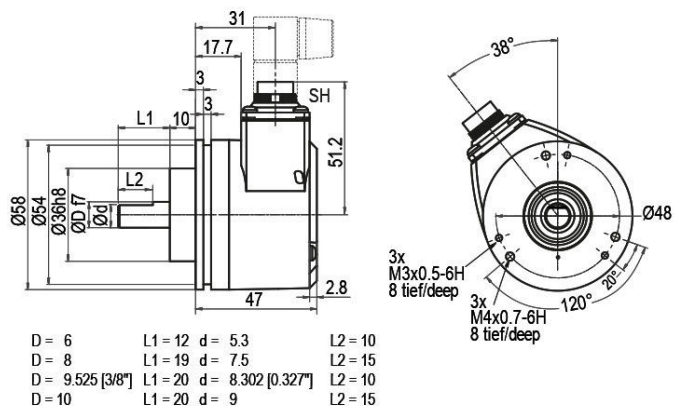

All dimensions in mm


Description


N inv. poss.

R5	radial, 5-pin, Connector connected to encoder housing	—
R6	radial, 6-pin, Connector connected to encoder housing	—
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	R5	R6	R8	R8	R12	R12
	5-pin	6-pin	8-pin	8-pin	12-pin	12-pin
Circuit	D2	D2	D2	D1	D2	D1
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	5	C	C
—	—	—	—	—	—	—
A inv.	—	—	—	6	—	F
B inv.	—	—	—	7	—	A
N inv.	—	—	—	8	—	D
n. c.	—	5	6, 7, 8	—	A, D, F, G, J	G, J
Shield	—	—	—	—	—	—


	A7
	7-pin
	
Circuit	D2
GND	1
(+) Vcc	2
A	3
B	4
N	5
—	—
A inv.	—
B inv.	—
N inv.	—
n. c.	6, 7
Shield	—

	R7
	7-pin
	
Circuit	D2
GND	1
(+) Vcc	2
A	3
B	4
N	5
–	–
A inv.	–
B inv.	–
N inv.	–
n. c.	6, 7
Shield	–

Datos técnicos

Encoder EI30 M 058 CL

Connector (M23) A12M, axial, 12-pin

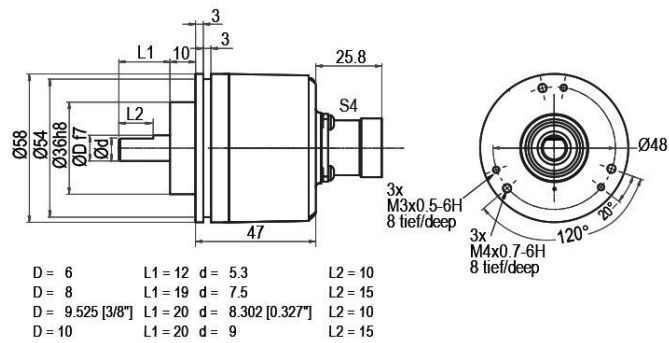

All dimensions in mm

Description

N inv. poss.

A12M axial, 12-pin, Connector connected to encoder housing


Assignments

	A12M	A12M
	12-pin	12-pin
Circuit	D2	D1
GND	10	10
(+) Vcc	12	12
A	5	5
B	8	8
N	3	3
—	—	—
A inv.	—	6
B inv.	—	1
N inv.	—	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11
Shield	—	—

Datos técnicos

Encoder EI30 M 058 CL

Connector (M23) R12M, radial, 12-pin

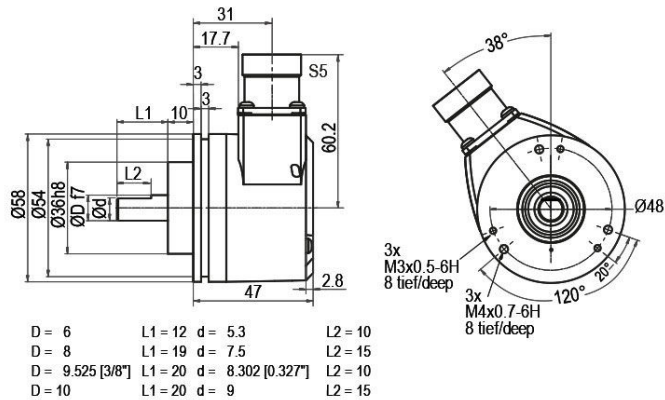

All dimensions in mm

Description

N inv. poss.

R12M radial, 12-pin, Connector connected to encoder housing


Assignments

	R12M	R12M
	12-pin	12-pin
Circuit	D2	D1
GND	10	10
(+) Vcc	12	12
A	5	5
B	8	8
N	3	3
—	—	—
A inv.	—	6
B inv.	—	1
N inv.	—	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11
Shield	—	—

Datos técnicos

Encoder EI30 M 058 CL

Connector (M23) AC12, axial, 12-pin (clockwise)

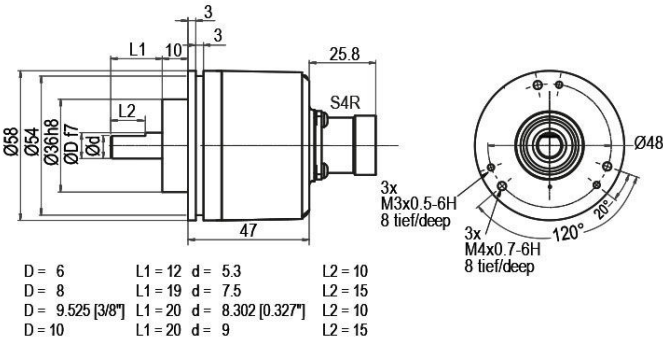

All dimensions in mm

Description

N inv. poss.

AC12 axial, 12-pin, Connector connected to encoder housing


Assignments

	AC12 12-pin	AC12 12-pin
Circuit	D2	D1
GND	10	10
(+) Vcc	12	12
A	5	5
B	8	8
N	3	3
—	—	—
A inv.	—	6
B inv.	—	1
N inv.	—	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11
Shield	—	—

Datos técnicos

Encoder EI30 M 058 CL

Connector (M23) RC12, radial, 12-pin (clockwise)

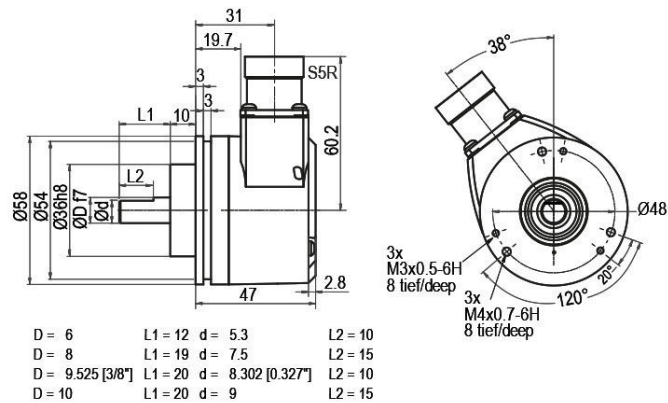

All dimensions in mm

Description N inv. poss.

RC12 radial, 12-pin, Connector connected to encoder housing


Assignments

	RC12	RC12
	12-pin	12-pin
Circuit	D2	D1
GND	10	10
(+) Vcc	12	12
A	5	5
B	8	8
N	3	3
—	—	—
A inv.	—	6
B inv.	—	1
N inv.	—	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11
Shield	—	—

Datos técnicos

Encoder EI30 M 058 CL

Sensor-connector (M12x1) AS axial, 5-, 8-pin

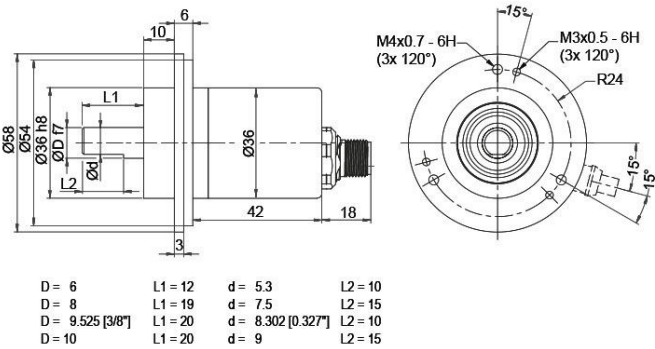

All dimensions in mm


Description		N inv. poss.
AS5	axial, 5-pin, Connector connected to encoder housing	—
AS8	axial, 8-pin, Connector connected to encoder housing	•

	RS5	RS8
	5-pin	8-pin
Circuit	D2	D1
GND	3	1
(+) Vcc	1	2
A	4	3
B	2	4
N	5	5
—	—	—
A inv.	—	6
B inv.	—	7
N inv.	—	8
n. c.	—	—
Shield	—	—

Datos técnicos

Encoder EI30 M 058 CL

Sensor-connector (M12x1) RS radial, 5-, 8-pin

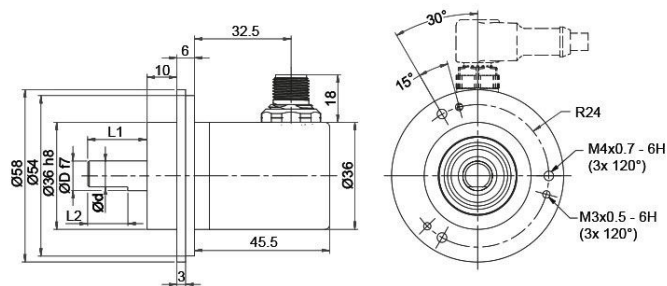

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

All dimensions in mm

Description

N inv. poss.

RS5	radial, 5-pin, Connector connected to encoder housing	—
RS8	radial, 8-pin, Connector connected to encoder housing	•

Assignments

	RS5 5-pin	RS8 8-pin
Circuit	D2	D1
GND	3	1
(+) Vcc	1	2
A	4	3
B	2	4
N	5	5
—	—	—
A inv.	—	6
B inv.	—	7
N inv.	—	8
n. c.	—	—
Shield	—	—

Datos técnicos

Encoder EI30 M 058 CL

Options

Low-friction bearings

Order key

The encoder EI30 M 058 CL is also available as a particularly smooth- running low-friction encoder. The starting torque is thereby changed to ≤ 0.5 Ncm [0.708 in-ozf] and the protection class at the shaft input to IP50.

LB

Shafts sealed to IP67, only with 10 mm [0.394"] shaft

Order key

The encoder EI30 M 058 CL can be supplied in a IP67 version. (full IP67 only connection AS, RS, A-C or R-C version; not cable connection R-IP = IP40).

IP

Max. RPM: 3500 min⁻¹
 Permitted Shaft-Loading: axial 100 N [10.197 kp]; radial 110 N [11.216 kp]
 Starting-torque: approx. 4 Ncm [5.664 in-ozf] at ambient temperature

Low temperature

Order key

The encoder EI30 M 058 CL with the output circuit types D2, D1 is also available with the extended temperature range -40 °C up to +85 °C [-40 °F up to +185 °F] (measured at the flange).

LT

Pressure equalising membrane

Order key

The EI30 M 058 CL shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity.

PE

The IP67 protection level, temperature range and salt spray resistance are maintained.
 Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1.

Cable length

Order key

The encoder EI30 M 058 CL can be supplied with more than 2 m cable.
 The maximum cable length depends on the supply voltage and the frequency.

XXX = Decimeter

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.
 Example: 5 m cable = 050

Datos técnicos

Encoder EI30 M 058 CL

Example Order No.	Type				
EI30 M 058 CL	EI30 M 058 CL	EI30 M 058 CL			
Shaft					
10	06; 08; 4Z; 10				
Pulses per revolution PPR:					
16384	1-16384 Other PPRs on request				
Channels:					
N	B, N				
Output circuit					
D1	Resolution PPR	Power supply VDC	Output circuit	—	Order key
	1-16384	4.75 - 30	HTL (TTL at 5 VDC)	—	D2
		4.75 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D1

Datos técnicos

Encoder EI30 M 058 CL

Electrical connections

Description		N inv. poss.	Order key
Cable: length (2 m standard)			
A-C	radial, shield not connected (IP40)	•	R-IP
	axial, shield connected to encoder housing	•	A-C
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, axial	–	A5
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, axial	–	A6
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, axial	•	A8
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, axial	•	A12
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, axial	–	A7
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, axial	•	A12M
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, axial	•	AC12
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 5-pin, axial	–	AS5
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, axial	•	AS8
	sensor-connector, M12x1, 8-pin, radial	•	RS8

Options

Description	Order key
Low-friction bearings	LB
Shafts sealed to IP67, only with 10 mm [0.394"] shaft	IP
Low temperature	LT
Pressure equalising membrane	PE
Without option	Empty
Cable length	XXX = Decimeter

Example Order No.:							Your encoder	
EI30 M 058 CL	10	16384	N	D1	A-C	EI30 M 058 CL		

Código de producto

Denominación del artículo: EABB CCCDDEE FFFFFFF GHJJKK LLMNNOPPP RR

A	Tipo de codificador rotatorio I: Incremental S: Absoluto, Singleturn M: Absoluto, Multiturn
BB	Serie 10: Entry 30: Basic 50: Extended 70: Advanced
CCC	Diámetro de la brida 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	Tipo de brida BB: Eje hueco con orificio ciego CC: Brida de sujeción (diseño compacto) CF: Brida de sujeción (alimentos y bebidas) CH: Brida de sujeción (ejecución para carga pesada) CL: Brida de sujeción HI: Eje hueco (aislado) HO: Eje hueco HT: Eje hueco (brazo de torsión especial) RC: Brida redonda (36/40 brida de sujeción, 58 con eje de 6 mm) RE: Brida redonda (orificios ampliados) RN: Brida redonda SC: Acoplamiento de estátor SF: Brida roscada (53 brida de sujeción, 58 alimentos y bebidas) SI: Brida servo (carga del eje y protección IP ampliadas) SQ: Brida cuadrada SR: Brida roscada (36/40 brida de sujeción, 58 resistente a la corrosión) SY: Synchro (incremental), Servo (36), Synchro (58) (absoluto) TM: Tacómetro (115 con eje de 1 mm, 58 retroalimentación del motor) TS: Tacómetro (eje de 10 mm)
EE	Diámetro del eje/orificio 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: Orificio hueco/ciego (6 ... 72 mm)
FFFFFF	Señal/Resolución Axxxx: A Bxxxx: AB Nxxxx: ABN P16384: Programable xx: Singleturn, 1 ... 16 bits xx: Multiturn, 0 ... 43 bits (00 con Singleturn)
G	Separación galvánica (solo absoluto) 0: sin 1: con
HH	Alimentación de tensión (solo absoluto) 0: 10 ... 32 V CC/con separación galvánica 1: 4,75 ... 5,5 V CC 2: 18 ... 30 V CC
J	Principio de funcionamiento M: magnético O: óptico P: interpolado ópticamente

Código de producto

KK	Interfaz 01: RS485 07: SSI binario 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	Conexión eléctrica M08: Conector redondo M8 M12: Conector redondo M12 M16: Conector redondo M16 M23: Conector redondo M23 M12BC: Conector de cubierta de bus
M	Salida de cable A: Axial R: Radial T: Tangencial
NN	Número de polos xx: Número de polos
O	Conexión de blindaje (cable de 2 m) (opcional) C: conectado N: no conectado
PPP	Longitud de cable xxx: Longitud de cable (en dm)

Nota



Encontrará una lista con todos los tipos de equipo disponibles en el sitio web de Leuze: www.leuze.com.

