


## **Technical data sheet** Light curtain receiver Part no.: 50123349 CML730i-R40-1890.A/D3-M12

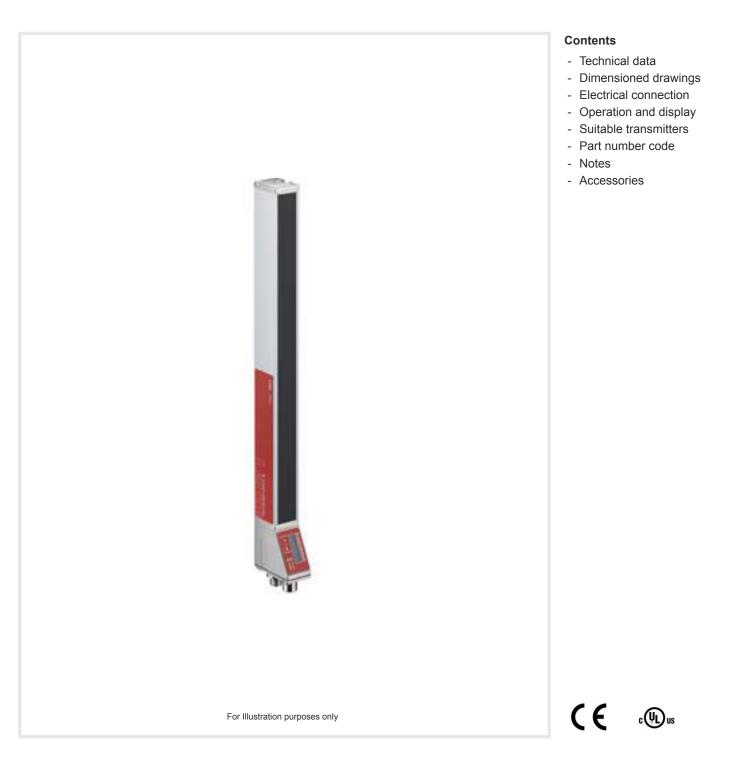

Leuze electronic GmbH + Co. KG

info@leuze.com • www.leuze.com changes 
 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2024-06-21

We reserve the right to make technical

## **Technical data**

# Leuze

#### Basic data

Basic data		
Series	730	
Operating principle	Throughbeam principle	
Device type	Receiver	
Contains	2x BT-NC sliding block	
Application	Detection of transparent objects	
	Object measurement	
Special version		
Special version	Crossed-beam scanning	
	Diagonal-beam scanning	
	Parallel-beam scanning	
Optical data		
Operating range	0.3 9.5 m	
Operating range	Guaranteed operating range	
Operating range, transparent media	0.3 3.5 m	
Operating range limit	0.2 12 m	
Operating range limit	Typical operating range	
Measurement field length	1,890 mm	
Number of beams	47 Piece(s)	
Beam spacing	40 mm	
Measurement data		
Minimum object diameter	50 mm	
Electrical data		
Protective circuit	Polarity reversal protection	
	Short circuit protected	
	Transient protection	
Performance data		
Supply voltage U <sub>B</sub>	18 30 V, DC	
Residual ripple	0 15 %, From U <sub>B</sub>	
Open-circuit current	0 350 mA, The specified values refer to the entire package consisting of transmitter and receiver.	
Inputs/outputs selectable		
Number of inputs/outputs selectable		
Туре	Inputs/outputs selectable	
Voltage type, outputs	DC	
Switching voltage, outputs	Typ. U <sub>B</sub> / 0 V	
Switching voltage, inputs	high: ≥6V Iow: ≤ 4 V	
	IOW: $\leq 4 V$	
Input/output 1		
Time behavior		
Cycle time	1 ms	
Response time per beam	10 µs	
Interface		
Туре	RS 485 Modbus	
RS 485		
Function	Process	
Service interface		
Туре	IO-Link	

	IO-Link Function	Configuration via software
		Service
0	nnection	
J	mber of connections	2 Piece(s)
	ug outlet	Axial
	Connection 1 Function	Configuration interface
	Function	Configuration interface Connection to transmitter
		Signal IN
		Signal OUT
		Voltage supply
	Type of connection	Connector
	Thread size	M12
	Туре	Male
	Material	Metal
	No. of pins	8 -pin
	Encoding	A-coded
	Connection 2	
	Function	BUS IN
		BUS OUT
	Type of connection	Connector
	Thread size	M12 Female
	Type	
	Material	Metal
	No. of pins	5 -pin B-coded
	Encoding	D-COURD
	echanical data	
	esign	Cubic
i	mension (W x H x L)	29 mm x 35.4 mm x 1,995 mm
	ousing material	Metal
	etal housing	Aluminum
	ens cover material	Plastic
e	et weight	2,050 g
	ousing color	Silver
y	pe of fastening	Groove mounting
		Via optional mounting device
	peration and display	
	vpe of display	LED
		OLED display
	umber of LEDs	2 Piece(s)
	vpe of configuration	Software
		Teach-in
		Membrane keyboard
	perational controls	Membrane Reyboard
	perational controls	Wembrane Reyboard
	nvironmental data	
	nvironmental data mbient temperature, operation	-30 60 °C
1	nvironmental data	
	nvironmental data mbient temperature, operation	-30 60 °C
	nvironmental data mbient temperature, operation mbient temperature, storage ertifications egree of protection	-30 60 °C -40 70 °C IP 65
	nvironmental data mbient temperature, operation mbient temperature, storage ertifications egree of protection rotection class	-30 60 °C -40 70 °C IP 65 III
	nvironmental data mbient temperature, operation mbient temperature, storage ertifications egree of protection	-30 60 °C -40 70 °C IP 65

## **Technical data**


Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549

#### 3/8

## Leuze

## **Dimensioned drawings**

All dimensions in millimeters

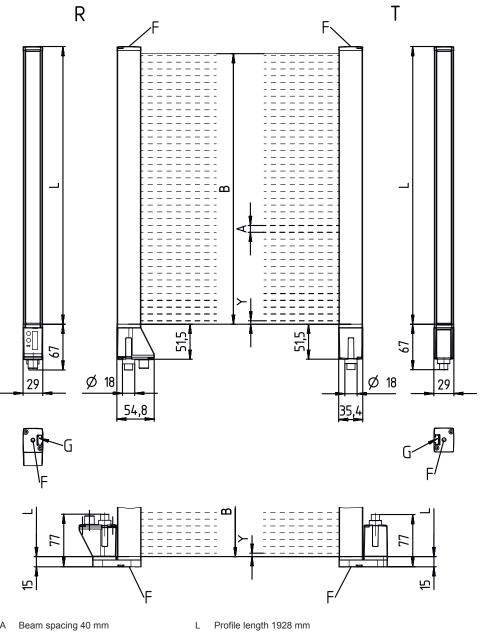

Beam spacing 40 mm А

Fastening groove

- В Measurement field length 1890 mm
- F M6 thread

G

R Receiver

Т


5 mm Υ

Transmitter

## Leuze

## **Dimensioned drawings**



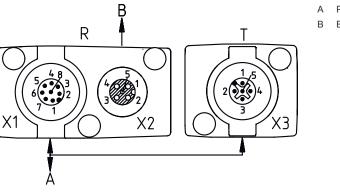

A PWR / SW IN / OUTB BUS IN / OUT


## A Electrical connection

#### **Connection 1**

Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	RS 485 Tx+		
7	RS 485 Tx+		
8	FE/SHIELD		



#### **Connection 2**

Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	B-coded

## **Electrical connection**


1 2

3

4

5

#### Pin Pin assignment V+ Tx-PB GND Tx+ FE/SHIELD



LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

## Suitable transmitters

 Part no.	Designation	Article	Description
50118652	CML730i-T40- 1890.A-M12	Light curtain transmitter	Operating range: 0.3 9.5 m Connection: Connector, M12, Axial, 5 -pin

## Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series           720i: 720i series           730i: 730i series
Y	Device type T: transmitter R: receiver
22	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus

#### 6/8

Leuze

## Part number code



DDD	Special equipment -PS: Power Setting		
EEE	Electrical connection M12: M12 connector		
FFF -EX: Explosion protection			
	Note		
A	A list with all available device types can be found on the Leuze website at www.leuze.com.		

## Notes

Observe intended use!
this product is not a safety sensor and is not intended as personnel protection.         the product may only be put into operation by competent persons.         the product in accordance with its intended use.



#### For UL applications:

 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

### Accessories

## Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

## Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR

## Accessories

# Leuze

## Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

### Services

	Part no.	Designation	Article	Description
ц. С	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
6	✤ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.