

Technical data sheet Light curtain receiver Part no.: 50123170 CML730i-R20-1110.A/PB-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

Technical data

Leuze

Basic data Series 730 **Operating principle** Throughbeam principle Device type Receiver Contains 2x BT-NC sliding block Application Detection of transparent objects Object measurement **Special version** Special version Crossed-beam scanning Diagonal-beam scanning Parallel-beam scanning **Optical data Operating range** 0.3 ... 9.5 m **Operating range** Guaranteed operating range Operating range, transparent media 0.3 ... 3.5 m **Operating range limit** 0.2 ... 12 m Operating range limit Typical operating range Measurement field length 1,110 mm Number of beams 56 Piece(s) Beam spacing 20 mm **Measurement data** Minimum object diameter 30 mm **Electrical data** Protective circuit Polarity reversal protection Short circuit protected Transient protection Performance data Supply voltage U_B 18 ... 30 V, DC 0 ... 15 %, From U_B **Residual ripple** 0 ... 270 mA, The specified values refer **Open-circuit current** to the entire package consisting of transmitter and receiver. Inputs/outputs selectable 100 mA Output current, max.

	Input resistance	6,000 Ω
	Number of inputs/outputs selectable	2 Piece(s)
	Туре	Inputs/outputs selectable
	Voltage type, outputs	DC
	Switching voltage, outputs	Typ. U _B / 0 V
	Voltage type, inputs	DC
	Switching voltage, inputs	high: ≥6V
		low: $\leq 4 \text{ V}$
	Input/output 1	
	Activation/disable delay	1 ms
_		
	ime behavior	
С	ycle time	1 ms
R	esponse time per beam	10 µs
Ir	iterface	
Ту	уре	PROFIBUS DP

	PROFIBUS DP Function	Process
S	ervice interface	
Туре		IO-Link
	10 link	
	IO-Link Function	Configuration via software
	T unction	Service
		Service
C	onnection	
N	umber of connections	2 Piece(s)
PI	ug outlet	Axial
	Connection 1	
	Function	Configuration interface
		Connection to transmitter
		Signal IN
		Signal OUT
		-
	Town of commontion	Voltage supply Connector
	Type of connection	
	Thread size	M12
	Туре	Male
	Material	Metal
	No. of pins	8 -pin
	Encoding	A-coded
	Connection 2	
	Function	BUS IN
		BUS OUT
	Type of connection	Connector
	Thread size	M12
	Type	Female
	Material	Metal
	No. of pins	5 -pin B-coded
	Encoding	B-coded
М	echanical data	
De	esign	Cubic
Di	mension (W x H x L)	29 mm x 35.4 mm x 1,195 mm
Ho	ousing material	Metal
M	etal housing	Aluminum
Le	ens cover material	Plastic
Ne	et weight	1,300 g
Ho	ousing color	Silver
Ту	pe of fastening	Groove mounting
		Via optional mounting device
ο	peration and display	
Тν	pe of display	LED
		OLED display
N	umber of LEDs	2 Piece(s)
	pe of configuration	Software
- 1	<u></u>	Teach-in
O	perational controls	Membrane keyboard
	nvironmental data	
_		
	nbient temperature, operation	-30 60 °C
A	nbient temperature, storage	-40 70 °C

Technical data

Certifications

Degree of protection	IP 65
Protection class	III
Approvals	c UL US
Standards applied	IEC 60947-5-2


Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ECLASS 15.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549



Dimensioned drawings

All dimensions in millimeters

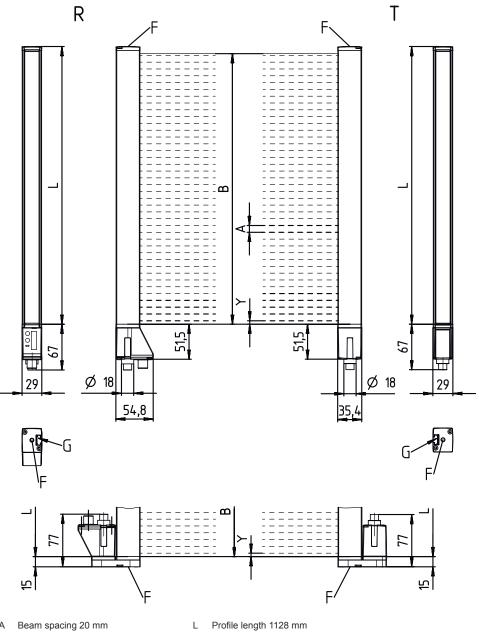

Beam spacing 20 mm А

Fastening groove

- В Measurement field length 1110 mm
- F M6 thread

G

- R
 - Υ 5 mm

Transmitter

Receiver


Т

We reserve the right to make technical Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com changes The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2025-04-04



Dimensioned drawings





A PWR / SW IN / OUTB BUS IN / OUT

Electrical connection

Connection 1

Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	RS 485 Tx+		
7	RS 485 Tx+		
8	FE/SHIELD		



Connection 2

Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	B-coded

Electrical connection

Pin Pin assignment 1 V+ 2 Tx 3 PB GND 4 Tx+ 5 FE/SHIELD

Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

 Part no.	Designation	Article	Description
50118635	CML730i-T20-1110.A- M12	Light curtain transmitter	Operating range: 0.3 9.5 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series 720i: 720i series 730i: 730i series
Y	Device type T: transmitter R: receiver
22	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus



Part number code



DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
	Note
A	∜ A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes

Observe intended use!
 This product is not a safety sensor and is not intended as personnel protection. The product may only be put into operation by competent persons. Only use the product in accordance with its intended use.



For UL applications:

 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR

Leuze

Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Configuration devices

Accessories

	Part no.	Designation	Article	Description
165	50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

Note

以 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.