

## Technical data sheet

### Safety light curtain transmitter

Part no.: 68006109  
MLC500T14-900/A



For illustration purposes only

#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Operation and display
- Suitable receivers
- Part number code
- Notes
- Accessories



Technical data

Basic data

|             |                        |
|-------------|------------------------|
| Series      | MLC 500                |
| Device type | Transmitter            |
| Contains    | 2x BT-NC sliding block |
| Application | Finger protection      |

Characteristic parameters

|                             |                          |
|-----------------------------|--------------------------|
| Type                        | 4, IEC/EN 61496          |
| SIL                         | 3, IEC 61508             |
| SILCL                       | 3, IEC/EN 62061          |
| Mission time T <sub>M</sub> | 20 years, EN ISO 13849-1 |

Protective field data

|                         |           |
|-------------------------|-----------|
| Resolution              | 14 mm     |
| Protective field height | 900 mm    |
| Operating range         | 0 ... 6 m |

Optical data

|                          |                                           |
|--------------------------|-------------------------------------------|
| Synchronization          | Optical between transmitter and receiver  |
| Light source             | LED, Infrared                             |
| Wavelength               | 940 nm                                    |
| Transmitted-signal shape | Pulsed                                    |
| LED risk group           | Exempt group (in acc. with EN 62471:2008) |

Electrical data

|                    |                                                   |
|--------------------|---------------------------------------------------|
| Protective circuit | Overvoltage protection<br>Short circuit protected |
|--------------------|---------------------------------------------------|

Performance data

|                                       |                 |
|---------------------------------------|-----------------|
| Supply voltage U <sub>B</sub>         | 26.5 ... 31.6 V |
| Current consumption from AS-i circuit | 50 mA           |

Inputs

|                                    |            |
|------------------------------------|------------|
| Number of digital switching inputs | 1 Piece(s) |
|------------------------------------|------------|

Switching inputs

|                              |                         |
|------------------------------|-------------------------|
| Type                         | Digital switching input |
| Switching voltage high, min. | 18 V                    |
| Switching voltage low, max.  | 2.5 V                   |
| Switching voltage, typ.      | 22.5 V                  |
| Voltage type                 | DC                      |

Interface

|      |                             |
|------|-----------------------------|
| Type | AS-Interface Safety at Work |
|------|-----------------------------|

AS-i

|                                        |                               |
|----------------------------------------|-------------------------------|
| Function                               | Process                       |
| AS-i profile                           | S-0.B.F                       |
| Slave address                          | 1..31 programmable, default=0 |
| Cycle time acc. to AS-i specifications | Max. 5 ms ms                  |

Connection

|                       |            |
|-----------------------|------------|
| Number of connections | 1 Piece(s) |
|-----------------------|------------|

Connection 1

|                    |                   |
|--------------------|-------------------|
| Function           | Machine interface |
| Type of connection | Connector         |
| Thread size        | M12               |
| Material           | Metal             |
| No. of pins        | 5 -pin            |

Cable properties

|                                            |                      |
|--------------------------------------------|----------------------|
| Permissible conductor cross section, typ.  | 0.25 mm <sup>2</sup> |
| Length of connection cable, max.           | 100 m                |
| Permissible cable resistance to load, max. | 200 Ω                |

Mechanical data

|                       |                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------|
| Dimension (W x H x L) | 29 mm x 966 mm x 35.4 mm                                                          |
| Housing material      | Metal                                                                             |
| Metal housing         | Aluminum                                                                          |
| Lens cover material   | Plastic / PMMA                                                                    |
| Material of end caps  | Diecast zinc                                                                      |
| Net weight            | 1,050 g                                                                           |
| Housing color         | Yellow, RAL 1021                                                                  |
| Type of fastening     | Groove mounting<br>Mounting brackets<br>Mounting on Device Column<br>Swivel mount |

Operation and display

|                 |            |
|-----------------|------------|
| Type of display | LED        |
| Number of LEDs  | 2 Piece(s) |

Environmental data

|                                    |               |
|------------------------------------|---------------|
| Ambient temperature, operation     | 0 ... 55 °C   |
| Ambient temperature, storage       | -30 ... 70 °C |
| Relative humidity (non-condensing) | 0 ... 95 %    |

Certifications

|                      |                                     |
|----------------------|-------------------------------------|
| Degree of protection | IP 65                               |
| Protection class     | III                                 |
| Certifications       | c TÜV NRTL US<br>c UL US<br>TÜV Süd |
| Vibration resistance | 50 m/s <sup>2</sup>                 |
| Shock resistance     | 100 m/s <sup>2</sup>                |
| US patents           | US 6,418,546 B                      |


Technical data

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| ECLASS 5.1.4          | 27272704 |
| ECLASS 8.0            | 27272704 |
| ECLASS 9.0            | 27272704 |
| ECLASS 10.0           | 27272704 |
| ECLASS 11.0           | 27272704 |
| ECLASS 12.0           | 27272704 |
| ECLASS 13.0           | 27272704 |
| ECLASS 14.0           | 27272704 |
| ETIM 5.0              | EC002549 |
| ETIM 6.0              | EC002549 |
| ETIM 7.0              | EC002549 |
| ETIM 8.0              | EC002549 |
| ETIM 9.0              | EC002549 |

Dimensioned drawings

All dimensions in millimeters

Calculation of the effective protective field height  $H_{PFE} = H_{PFN} + B + C$

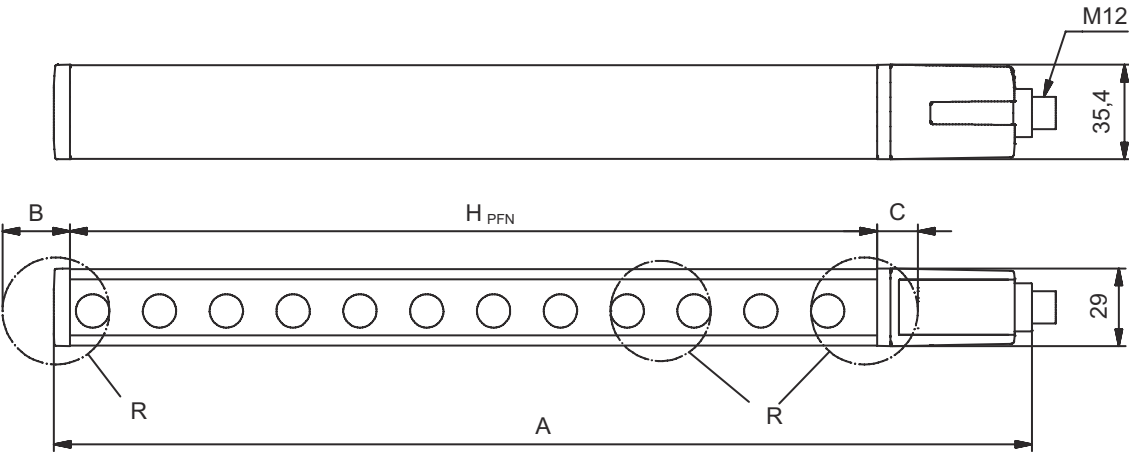

- $H_{PFE}$  Effective protective field height = 912 mm

$H_{PFN}$  Nominal protective field height = 900 mm

$A$  Total height = 966 mm

$B$  6 mm
- $C$  6 mm

$R$  Effective protective field height  $H_{PFE}$  goes beyond the dimensions of the optics area to the outer borders of the circles labeled with  $R$ .


Electrical connection

Connection 1

|                    |                   |
|--------------------|-------------------|
| Function           | Machine interface |
| Type of connection | Connector         |
| Thread size        | M12               |
| Type               | Male              |
| Material           | Metal             |
| No. of pins        | 5 -pin            |
| Encoding           | A-coded           |

Electrical connection

| Pin | Pin assignment |
|-----|----------------|
| 1   | AS-i+          |
| 2   | n.c.           |
| 3   | AS-i-          |
| 4   | n.c.           |
| 5   | n.c.           |



Operation and display

| LED | Display                 | Meaning             |
|-----|-------------------------|---------------------|
| 1   | Off                     | Device switched off |
|     | Red, continuous light   | Device error        |
|     | Green, continuous light | Normal operation    |

Suitable receivers

|                                                                                    | Part no. | Designation     | Article                       | Description                                                                                                                                                         |
|------------------------------------------------------------------------------------|----------|-----------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 68007109 | MLC510R14-900/A | Safety light curtain receiver | Resolution: 14 mm<br>Protective field height: 900 mm<br>Response time: 20 ms<br>Interface: AS-Interface Safety at Work<br>Connection: Connector, M12, Metal, 5 -pin |

Part number code

Part designation: MLCxyy-za-hhhhei-ooo

| MLC  | Safety light curtain                                                                                                                                                                                                                                                                        |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| x    | <b>Series</b><br>3: MLC 300<br>5: MLC 500                                                                                                                                                                                                                                                   |
| yy   | <b>Function classes</b><br>00: transmitter<br>01: transmitter (AIDA)<br>02: transmitter with test input<br>10: basic receiver - automatic restart<br>11: basic receiver - automatic restart (AIDA)<br>20: standard receiver - EDM/RES selectable<br>30: extended receiver - blanking/muting |
| z    | <b>Device type</b><br>T: transmitter<br>R: receiver                                                                                                                                                                                                                                         |
| a    | <b>Resolution</b><br>14: 14 mm<br>20: 20 mm<br>30: 30 mm<br>40: 40 mm<br>90: 90 mm                                                                                                                                                                                                          |
| hhhh | <b>Protective field height</b><br>150 ... 3000: from 150 mm to 3000 mm                                                                                                                                                                                                                      |
| e    | <b>Host/Guest (optional)</b><br>H: Host<br>MG: Middle Guest<br>G: Guest                                                                                                                                                                                                                     |

## Part number code

**MLC**      **Safety light curtain**

|                                                                                                                                                                                                                                |                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| i                                                                                                                                                                                                                              | <b>Interface (optional)</b><br>/A: AS-i                                                                            |
| ooo                                                                                                                                                                                                                            | <b>Option</b><br>/V: high Vibration-proof<br>EX2: explosion protection (zones 2 + 22)<br>SPG: Smart Process Gating |
| <b>Note</b><br> A list with all available device types can be found on the Leuze website at <a href="http://www.leuze.com">www.leuze.com</a> . |                                                                                                                    |

## Notes

|                                                                                                                |                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>Observe intended use!</b> |                                                                                                                                                                                       |
|                                | <ul style="list-style-type: none"> <li>The product may only be put into operation by competent persons.</li> <li>Only use the product in accordance with its intended use.</li> </ul> |

## Accessories

### Mounting technology - Swivel mounts

|                                                                                    | Part no. | Designation | Article              | Description                                                                                                                                                 |
|------------------------------------------------------------------------------------|----------|-------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 429393   | BT-2HF      | Mounting bracket set | Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Clampable<br>Type of mounting device: Turning, 360°<br>Material: Metal, Plastic |

### Alignment aids

|                                                                                    | Part no. | Designation | Article       | Description               |
|------------------------------------------------------------------------------------|----------|-------------|---------------|---------------------------|
|  | 520101   | AC-ALM-M    | Alignment aid | Housing material: Plastic |

## Services

|                                                                                    | Part no. | Designation | Article           | Description                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------|----------|-------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | S981050  | CS40-I-140  | Safety inspection | Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application.<br>Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. |

Accessories

|                                                                                  | Part no. | Designation | Article          | Description                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------|----------|-------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | S981046  | CS40-S-140  | Start-up support | Details: For safety devices including stopping time measurement and initial inspection.<br>Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. |

| Note                                                                             |                                                                                                                                  |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
|  | <p>A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.</p> |