

# **Technical data sheet** Light curtain receiver

Part no.: 50123153

CML730i-R10-2080.A/PB-M12



### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories





### **Technical data**



#### Basic data

Series	730
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Detection of transparent objects
	Object measurement

#### **Special version**

Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning

### **Optical data**

Operating range	0.3 9.5 m
Operating range	Guaranteed operating range
Operating range, transparent media	0.3 3.5 m
Operating range limit	0.2 12 m
Operating range limit	Typical operating range
Measurement field length	2,080 mm
Number of beams	208 Piece(s)
Beam spacing	10 mm

#### Measurement data

Minimum object diameter 20	mn
----------------------------	----

#### **Electrical data**

Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection

### Performance data

Supply voltage U <sub>B</sub>	18 30 V, DC
Residual ripple	0 15 %, From U <sub>B</sub>
A	0 405 · A Th

435 mA, The specified values refer Open-circuit current to the entire package consisting of transmitter and receiver.

### Inputs/outputs selectable

Output current, max.	100 mA
Input resistance	6,000 Ω
Number of inputs/outputs selectable	2 Piece(s)
Type	Inputs/outputs selectable
Voltage type, outputs	DC
Switching voltage, outputs	Typ. U <sub>B</sub> / 0 V
Voltage type, inputs	DC
Switching voltage, inputs	high: ≥6V
	low: ≤ 4 V

### Time behavior

Input/output 1 Activation/disable delay

Cycle time	2.23 ms
Response time per beam	10 μs

Leuze electronic GmbH + Co. KG

### Interface

Туре	PROFIBUS DP
Type	FROFIBUS DF

PROFIBUS DP		
Function	Process	
lamilas listaufasa		

### Service interface

IO-Link	
Function	Configuration via software
	Service

IO-Link

#### Connection

Type

Number of connections	2 Piece(s)
Plug outlet	Axial

Connection '	1
--------------	---

Connection 1	
Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Connection 2

Connection 2	
Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	B-coded

### **Mechanical data**

Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 2,155 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic
Net weight	2,200 g
Housing color	Silver
Type of fastening	Groove mounting
	Via optional mounting device

### Operation and display

Type of display	LED
	OLED display
Number of LEDs	2 Piece(s)
Type of configuration	Software
	Teach-in
Operational controls	Membrane keyboard

### **Environmental data**

Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C

# **Technical data**



### Certifications

Degree of protection	IP 65
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2


### Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549

# **Dimensioned drawings**

Leuze


All dimensions in millimeters

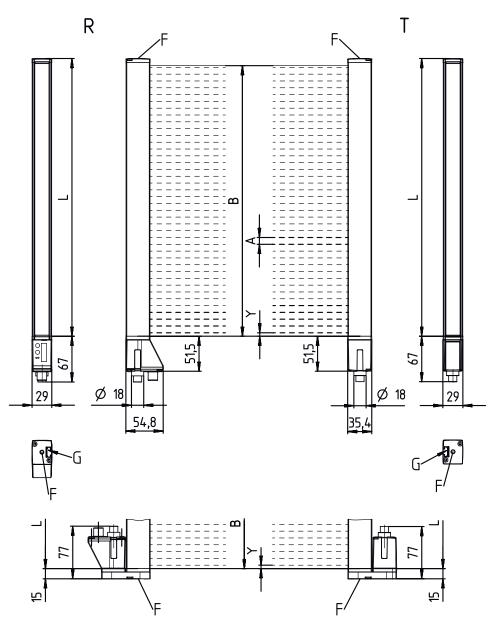

- Beam spacing 10 mm
- В Measurement field length 2080 mm
- M6 thread
- Fastening groove
- Profile length 2088 mm
- Transmitter
- Receiver
- 5 mm

# **Dimensioned drawings**



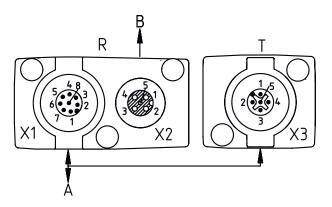


- PWR / SW IN / OUT
- BUS IN / OUT

# **Electrical connection**

### Connection 1

Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin	Pin assignment
1	V+
2	I/O 1
3	GND
4	IO-Link
5	I/O 2
6	RS 485 Tx+
7	RS 485 Tx+
8	FE/SHIELD



### **Connection 2**

Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	B-coded

info@leuze.com • www.leuze.com

# **Electrical connection**



Pin	Pin assignment
1	V+
2	Tx-
3	PB GND
4	Tx+
5	FE/SHIELD



# **Operation and display**

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

# Suitable transmitters

Part no.	Designation	Article	Description
50118623	CML730i-T10- 2080.A-M12	Light curtain transmitter	Operating range: 0.3 9.5 m Connection: Connector, M12, Axial, 5 -pin

# Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain			
7XXi	<b>Series</b> 720i: 720i series 730i: 730i series			
Υ	Device type T: transmitter R: receiver			
ZZ	Beam spacing         05: 5 mm         10: 10 mm         20: 20 mm         40: 40 mm			
AAAA	Measurement field length [mm], dependent on beam spacing			
В	Equipment A: Axial connector outlet R: Rear connector outlet			
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus			

info@leuze.com • www.leuze.com

### Part number code



DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection

#### Note



 $\$  A list with all available device types can be found on the Leuze website at www.leuze.com.

### **Notes**



#### Observe intended use!



- This product is not a safety sensor and is not intended as personnel protection.
- Only use the product in accordance with its intended use.

### For UL applications:



- 🕏 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- 🖖 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

### **Accessories**

# Connection technology - Connection cables

Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

# Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR

### **Accessories**



# Mounting technology - Mounting brackets

Part no.	Designation	Article	Description
50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

# Configuration devices

	Part no.	Designation	Article	Description
IG	50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

# Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours.  Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

### Note



⋄ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.