

Fiche technique

Informations sur la gamme de codeurs rotatifs

Art. n°: 90000370

EI30-P 058 TM

Contenu

- Caractéristiques techniques
- Code d'article



Figure pouvant varier

Série d'encodeurs	EI 058 TM
Principe de base encodeur	incrémental
Principe de fonctionnement encodeur	optiquement interpolé
Diamètre de bride encodeur	Ø 58 mm
Type de bride encodeur	Bride de compteur de vitesse
Arbre plein/arbre creux encodeur	Arbre plein
Tension d'alimentation encodeur	10 ... 30 V DC
	4,75 ... 5,5 V CC
	5 ... 30 V CC
Commande de sortie encodeur	1 Vss Sin/Cos
	HTL
	HTL, inv.
	TTL
	TTL, RS422 compatible, inv.
Nombre d'impulsions encodeur	10000 I/U
	10240 I/U
	12000 I/U
	12500 I/U
	1440 I/U
	15000 I/U
	16384 I/U
	20000 I/U
	20480 I/U
	25000 I/U
	2880 I/U
	3000 I/U
	3600 I/U
	4000 I/U
	5760 I/U
	6000 I/U
	7200 I/U
	7500 I/U
	8000 I/U
	9182 I/U

Caractéristiques techniques

Encoder EI30 P 058 TM

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	motorfeedback flange
Flange material	aluminum
Housing material	aluminum
Flange diameter	Ø 58 mm [Ø 2.283"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature

Shaft	Ø Conus 1/10; 9.25 mm [Ø 3/8"] Order No. 10
--------------	--

Shaft length	L: 16.5 mm [0.65"]
--------------	--------------------

Max. Permissible shaft loading radial	80 N [8.157 kp]
---------------------------------------	-----------------

Max. Permissible shaft loading axial	60 N [6.118 kp]
--------------------------------------	-----------------

Bearings

Bearings type	2 precision ball bearings
Nomiale service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nomiale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrial Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany


General Data

Weight	approx. 220 g [7.76 oz]
Connections	cable output, 2 m, tangential
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-20 °C up to +80 °C [-4 °F up to +176 °F]

Caractéristiques techniques

Encoder EI30 P 058 TM

Cable connection T-C, tangential, with 2 m cable

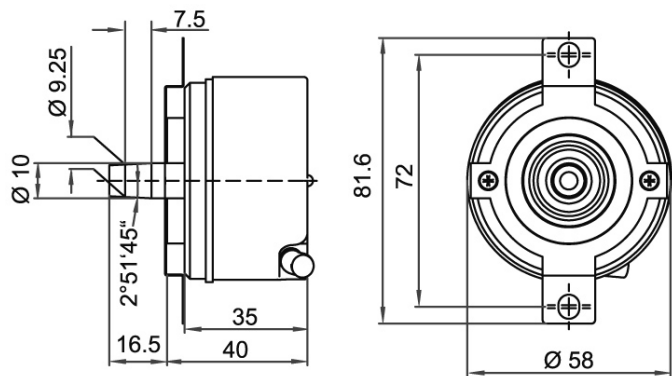

All dimensions in mm

Description		N inv. poss.
T-C	tangential, shield connected to encoder housing	•

Assignments			
Circuit	T-C	T-C	T-C
	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	-
-	-	-	-
A inv.	-	RD	YE
B inv.	-	BK, (BU at LT)	PK
N inv.	-	VT	-
Shield	flex	flex	flex

Caractéristiques techniques

Encoder EI30 P 058 TM

Options

Low-friction bearings	Order key
The encoder EI30 P 058 TM is also available as a particularly smooth- running low-friction encoder. The starting torque is thereby changed to ≤ 0.5 Ncm [0.708 in-ozf] and the protection class at the shaft input to IP50.	LB
Cable length	Order key
The encoder EI30 P 058 TM can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

Caractéristiques techniques

Encoder EI30 P 058 TM

Example Order No.	Type
EI30 P 058 TM	EI30 P 058 TM

Pulses per revolution PPR:

1024	4, 6, 25, 36, 50, 60, 64, 70, 88, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 360, 400, 500, 512, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000, 8000, 8192, 10000, 10240, 12500, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request
------	---

Channels:

N	N, B (SIN: B)
---	---------------

Output circuit

	Resolution PPR	Power supply VDC	Output circuit	-	Order key
C6	up to 2500	5 - 30	HTL (TTL at 5 VDC)	–	C7
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	–	D7
	up to 5000	4.75 - 5.5	TTL	–	C5
		4.75 - 5.5	TTL, RS422 comp., inverted	–	D5
		10 - 30	HTL	–	C6
		10 - 30	HTL inverted	–	D6
		10 - 30	TTL, RS422 comp., inverted	–	C1
		10 - 30	TTL, RS422 comp., inverted	–	D3
	(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	–	C3
		4.75 - 5.5	TTL, RS422 comp., inverted	–	D3
		10 - 30	HTL	–	C4
		10 - 30	HTL inverted	–	D4
		10 - 30	TTL, RS422 comp., inverted	–	C2
	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	–	D8

Electrical connections

	Description	N inv. poss.	Order key
T-C	Cable: length (2 m standard) tangential, shield connected to encoder housing	•	T-C

Options

Description	Order key
Low-friction bearings	LB
Without option	Empty
Cable length	XXX = Decimeter

Example Order No.:	EI30 P 058 TM	1024	N	C6	T-C	EI30 P 058 TM	Your encoder
--------------------	---------------	------	---	----	-----	---------------	--------------

Code d'article

Désignation d'article : **EABB CCCDDEE FFFFFFF GHJJKK LLMNOPPP RR**

A	Type de codeur rotatif I : Incrémental S : Absolu, mono-tour M : Absolu, multi-tour
BB	Série 10 : Entry 30 : Basic 50 : Extended 70 : Advanced
CCC	Diamètre de bride 024 : 24 mm 036 : 36 mm 058 : 58 mm 063 : 63 mm 067 : 67 mm 070 : 70 mm 080 : 80 mm 100 : 100 mm 115 : 115 mm
DD	Type de bride BB : Arbre creux avec alésage Sackloch CC : Bride de serrage (forme compacte) CF : Bride de serrage (aliments et boissons) CH : Bride de serrage (exécution pour charges lourdes) CL : Bride de serrage HI : Arbre creux (isolé) HO : Arbre creux HT : Arbre creux (supports de couple spéciaux) RC : Bride ronde (bride de serrage 36/40, 58 avec arbre de 6 mm) RE : Bride ronde (alésages étendus) RN : Bride ronde SC : Accouplement statorique SF : Bride à vis (bride de serrage 53, 58 Aliments et boissons) SI : Bride synchro (charge sur l'arbre étendue et protection IP) SQ : Bride carrée SR : Bride à vise (bride de serrage 36/40, 58 résistante à la corrosion) SY : Synchro (incrémental), Servo (36), Synchro (58) (absolu) TM : Tacho (115 avec arbre de 1 mm, rétroaction moteur 58) TS : Tacho (arbre de 10 mm)
EE	Diamètre arbre/alésage 06 : 6 mm 07 : 7 mm 08 : 8 mm 08 : 8 mm 10 : 10 mm 11 : 11 mm 12 : 12 mm 14 : 14 mm 15 : 15 mm 06-72 : Alésage creux/Sackloch (6 ... 72 mm)
FFFFFF	Signal/résolution Axxxxx : A Bxxxxx : AB Nxxxxx : ABN P16384 : programmable xx : Mono-tour, 1 ... 16 bit xx : Multi-tour, 0 ... 43 bit (00 pour mono-tour)
G	Isolation galvanique (absolu uniquement) 0 : sans 1 : avec
HH	Alimentation en tension (absolu uniquement) 0 : 10 ... 32 V CC/avec isolation galvanique 1 : 4,75 ... 5,5 V CC 2 : 18 ... 30 V CC
J	Principe de fonctionnement M : magnétique O : Optique P : optiquement interpolé

Code d'article

KK	Interface 01 : RS485 07 : SSI binaire 08 : SSI Gray 35 : CANopen 38 : EtherCAT 48 : PROFINET 58 : EtherNET/IP
LL	Raccordement électrique M08 : Connecteur rond M8 M12 : Connecteur rond M12 M16 : Connecteur rond M16 M23 : Connecteur rond M23 M12BC : Connecteur boîtier réseau
M	Sortie de câble A : Axial R : Radial T : Tangentiel
NN	Nombre de pôles xx : Nombre de pôles
O	Connexion blindage (câble 2 m) (en option) C : raccordé N : non raccordé
PPP	Longueur de câble xxx : Longueur de câble (en dm)

Remarque



Vous trouverez une liste de tous les types d'appareil disponibles sur le site Internet de Leuze à l'adresse www.leuze.com.

