

## **Technical data sheet Light curtain receiver** Part no.: 50131894 CML720i-R05-2960.A/PN-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-05

We reserve the right to make technical changes

## **Technical data**

# Leuze

Series	720	
Operating principle	Throughbeam principle	
Device type	Receiver	
Contains	2x BT-NC sliding block	
Application	Object measurement	
Special version		
Special version	Crossed-beam scanning	
	Diagonal-beam scanning	
	Parallel-beam scanning	
Optical data		
perating range	0.1 3.5 m	
Operating range	Guaranteed operating range	
Dperating range limit	0.1 4.5 m	
Dperating range limit	Typical operating range	
Measurement field length	2,960 mm	
Number of beams	592 Piece(s)	
Beam spacing	5 mm	
leasurement data		
Minimum object diameter	10 mm	
Electrical data		
Protective circuit	Polarity reversal protection	
	Short circuit protected	
	Transient protection	
	· · · · · · · · · · · · · · · · · · ·	
Performance data		
Supply voltage U <sub>B</sub>	18 30 V, DC	
Residual ripple	0 15 %, From U <sub>B</sub>	
Open-circuit current	0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.	
Inputs/outputs selectable		
Output current, max.	100 mA	
Input resistance	6,000 Ω	
Number of inputs/outputs selectable Type	Inputs/outputs selectable	
IVDe	inputs/outputs selectable	
	DC	
Voltage type, outputs		
Voltage type, outputs Switching voltage, outputs	Typ. U <sub>B</sub> / 0 V	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs	Typ. U <sub>B</sub> / 0 V DC	
Voltage type, outputs Switching voltage, outputs	Typ. U <sub>B</sub> / 0 V DC high: ≥6V	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs	Typ. U <sub>B</sub> / 0 V DC	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	Typ. U <sub>B</sub> / 0 V DC high: ≥6V	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs	Typ. U <sub>B</sub> / 0 V DC high: ≥6V	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	Typ. U <sub>B</sub> / 0 V DC high: ≥6V Iow: ≤ 4 V	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior	Typ. $U_B / 0 V$ DC high: $\ge 6V$ low: $\le 4 V$ 1 ms	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior Readiness delay	Typ. U <sub>B</sub> / 0 V DC high: ≥6V low: ≤ 4 V 1 ms	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior Readiness delay Cycle time	Typ. U <sub>B</sub> / 0 V DC high: ≥6V low: ≤ 4 V 1 ms 1,500 ms 18.16 ms	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior Readiness delay Cycle time Response time per beam	Typ. U <sub>B</sub> / 0 V DC high: ≥6V low: ≤ 4 V 1 ms	
Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Fime behavior Readiness delay Cycle time	Typ. U <sub>B</sub> / 0 V DC high: ≥6V low: ≤ 4 V 1 ms 1,500 ms 18.16 ms	

Process
В
PROFINET RT
Integrated
10 Mbit/s
100 Mbit/s
IO-Link
Configuration via software
Service
3 Piece(s)
Axial
Configuration interface
Connection to transmitter
Signal IN
Signal OUT
Voltage supply
Connector
M12
Male
Metal
8 -pin
A-coded
BUS IN
Connector
M12
Female
Metal
4 -pin
D-coded
BUS OUT
Connector
M12
Female
Metal
4 -pin
D-coded
Cubic
29 mm x 35.4 mm x 3,035 mm
Metal
Aluminum
Plastic
3,000 g
3,000 g Silver Groove mounting

## **Technical data**

# Leuze


### **Operation and display**

Type of display	LED
	OLED display
Number of LEDs	4 Piece(s)
Type of configuration	Software
	Teach-in
Operational controls	Membrane keyboard
Environmental data	
Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C
. , .	-40 70 °C
Ambient temperature, storage Certifications	-40 70 °C
. , .	-40 70 °C IP 65
Certifications	
Certifications Degree of protection	IP 65
Certifications Degree of protection Protection class	IP 65 III

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ECLASS 15.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549

## **Dimensioned drawings**

All dimensions in millimeters

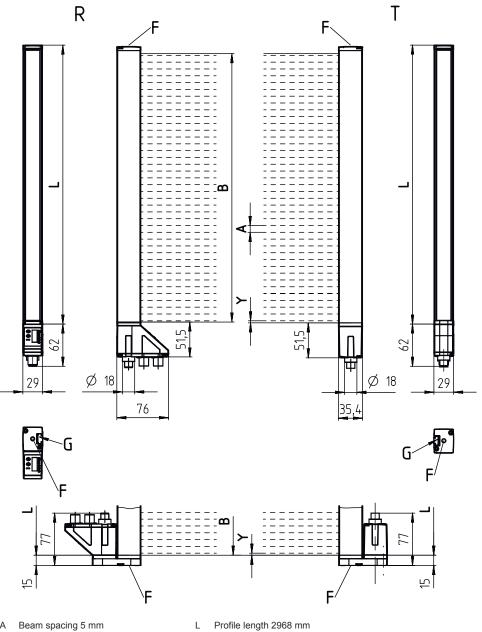

Beam spacing 5 mm А

Fastening groove

- В Measurement field length 2960 mm
- F M6 thread

G

- Transmitter Т R Receiver
- 2.5 mm Υ

# Leuze

## **Dimensioned drawings**

R

A

### В С А В BUS IN С $\cap$

- PWR / SW IN / OUT
- BUS OUT

### **Electrical connection Connection 1**

Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

**X1** 


### Pin Pin assignment


1	V+
2	I/O 1
3	GND
4	IO-Link
5	I/O 2
6	RS 485 Tx+
7	RS 485 Tx+
8	FE/SHIELD

### **Connection 2** X2A Function BUS IN Type of connection Connector Thread size M12 Female Туре Material Metal No. of pins 4 -pin Encoding D-coded

#### Pin Pin assignment

1	TD0+	
2	RD0+	
3	TD0-	
4	RD0-	








## **Electrical connection**

### Connection 3

Function	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded
Encoding	D-coded

X2B

Pin	Pin assignment
1	TD0+
2	RD0+
3	TD0-
4	RD0-



Leuze

## Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected
3	Green, continuous light (at the X2A / X2B connector)	Link
4	Yellow, continuous light (at the X2A / X2B connector)	Activity

## Suitable transmitters

 Part no.	Designation	Article	Description
50119404	CML720i-T05- 2960.A-M12	Light curtain transmitter	Operating range: 0.1 3.5 m Connection: Connector, M12, Axial, 5 -pin

## Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

berating principle easuring light curtain
<b>rries</b> 0i: 720i series 0i: 730i series
transmitter receiver
<b>xam spacing</b> : 5 mm : 10 mm : 20 mm : 40 mm
easurement field length [mm], dependent on beam spacing
<b>juipment</b> Axial connector outlet Rear connector outlet

## Part number code



CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Not	le
	A list with all available device types can be found on the Leuze website at www.leuze.com.

## Notes

Observe intended use!					
<ul> <li>This product is not a safety sensor and is not intended as personnel protection.</li> <li>The product may only be put into operation by competent persons.</li> <li>Only use the product in accordance with its intended use.</li> </ul>					

For UL applications:
----------------------

✤ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).

These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

## Accessories

## Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC
50135074	KS ET-M12-4A-P7- 050	Connection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

## Accessories

# Leuze

## Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

## Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR

## Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

## Configuration devices

	Part no.	Designation	Article	Description
165	50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

## Services

	Part no.	Designation	Article	Description
с. С	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

## Accessories





♦ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.