

# Technical data sheet Optical distance sensor

Part no.: 50137817

ODS9L2.8/LAK-650-M12



### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Accessories













### **Technical data**



#### Basic data

Series	9
Application	Fill-level monitoring
	Length measurement in material cutting
	Object measurement
Type of scanning system	Against object

### **Special version**

Special version	Activation input
	Deactivation input
	Teach input

### **Optical data**

Beam path	Collimated
Light source	Laser, Red
Wavelength	650 nm
Laser class	2, IEC/EN 60825-1:2014
Transmitted-signal shape	Pulsed
Pulse duration	22,000 μs
Light spot size [at sensor distance]	1 mm [650 mm]
Type of light spot geometry	Round

#### Measurement data

Measurement range	50 650 mm
Resolution	0.1 mm
Accuracy	1 %
Reference value, accuracy	Measurement distance
Reproducibility (1 sigma)	0.1 mm
Temperature drift	0.02 %/K
Referencing	No
Optical distance measurement principle	Triangulation

### **Electrical data**

Protective circuit	Polarity reversal protection	
		Short circuit protected
		Transient protection
	Performance data	
	Supply voltage U <sub>B</sub>	18 30 V, DC
	Residual ripple	0 15 %, From U <sub>B</sub>
	Open-circuit current	0 50 mA
	Inputs	
	Number of digital switching inputs	1 Piece(s)

Voltage type	DC
Switching voltage	$U_B$

### Digital switching input 1 Function

**Switching inputs** 

Function	Activation input
	Deactivation input
	Teach input
	Trigger

### Outputs

Number of analog outputs	1 Piece(s)
Number of digital switching outputs	1 Piece(s)

	Analog	output 1	
--	--------	----------	--

Androg output i	
Туре	Configurable, factory setting: current
Assignment	Connection 1, pin 2

### Switching outputs

Owitching outputs	
Voltage type	DC
	high: ≥(U <sub>B</sub> -2V)
	low: ≤ 2 V

### Switching output 1

Assignment	Connection 1, pin 4
Switching element	Transistor, Push-pull
Switching principle	IO-Link / light switching (PNP)/dark switching (NPN)

### Time behavior

Response time	1 ms, Under constant ambient conditions, 90% diffuse reflection, standard measure mode
Readiness delay	300 ms

#### Interface

Туре	IO-Link	
IO-Link		
COM mode	COM3	
Profile	Smart sensor profile	
Min. cycle time	COM3 = 0.5 ms	
Frame type	2.V	
Port type	A	
Specification	V1.1	
SIO-mode support	Yes	
Process data IN	4 byte	
Process data OUT	8 bit	
<b>Dual Channel</b>	Yes	

### Connection

Number of connections

Connection 1					
Function	Signal IN				
	Signal OUT				
	Voltage supply				
Type of connection	Connector, Turning, 90°				
Thread size	M12				
Туре	Male				
Material	Plastic				
No. of pins	5 -pin				
Encoding	A-coded				

1 Piece(s)

### **Mechanical data**

Dimension (W x H x L) 21 mm x 50 mm x 50 mm
Housing material Plastic
Lens cover material Glass
Net weight 50 g
Housing color Red
Type of fastening Through-hole mounting
Via optional mounting device

### **Technical data**



### Operation and display

LED
OLED display
2 Piece(s)
Control buttons
PC software
-20 50 °C
-30 70 °C
20,000 lx, EN 60947-5-2
IP 67
III
UL


### Classification


Customs tariff number	90318020
ECLASS 5.1.4	27270801
ECLASS 8.0	27270801
ECLASS 9.0	27270801
ECLASS 10.0	27270801
ECLASS 11.0	27270801
ECLASS 12.0	27270916
ECLASS 13.0	27270916
ECLASS 14.0	27270916
ECLASS 15.0	27270916
ETIM 5.0	EC001825
ETIM 6.0	EC001825
ETIM 7.0	EC001825
ETIM 8.0	EC001825
ETIM 9.0	EC001825
ETIM 10.0	EC001825


## **Dimensioned drawings**

Leuze

All dimensions in millimeters



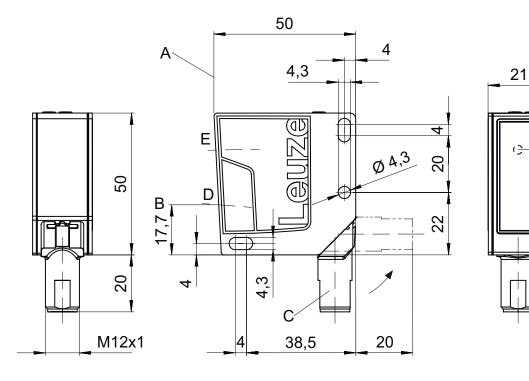



- Reference edge for the measurement
- Optical axis
- Device plug M12

- Receiver
- Transmitter
- Color display

- Yellow LED
- Green LED
- Control buttons

### **Electrical connection**


### **Connection 1**

Function	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Plastic
No. of pins	5 -pin
Encoding	A-coded

### **Electrical connection**




Pin	Pin assignment
1	18 30 V DC +
2	OUT mA / V
3	GND
4	IO-Link / OUT 1
5	multi funct



## **Diagrams**

Characteristic curve of analog output

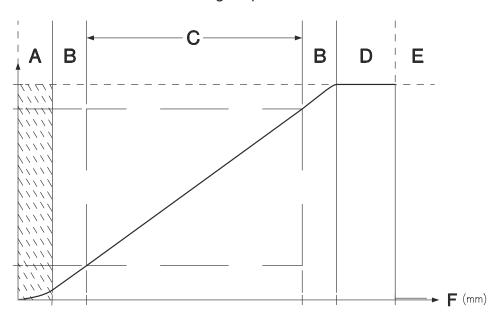


- Area not defined
- Linearity not defined
- Measurement range
- Object detected

- No object detected (characteristic curve behavior adjustable via IO-Link)
- Measurement distance

## **Diagrams**



### Accuracy of measurement

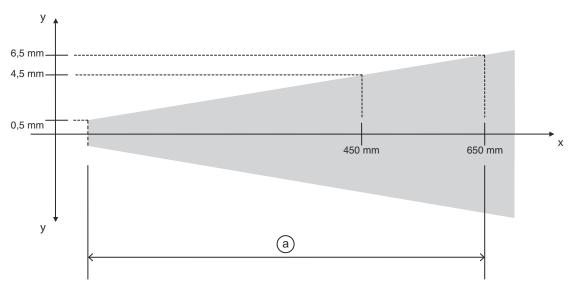

- Measurement distance
- Max. measurement error
- 1% of measurement value

## **Operation and display**

LED	Display	Meaning
1	Green, continuous light	Ready
2	Yellow, continuous light	Object in the measurement range

### Part number code

Part designation: ODS9XX.Y/ZAB-CCC-DDD

ODS9	Operating principle Optical distance sensor of the 9 series					
XX	Light source L2: laser class 2 L1: laser class 1					
Υ	Equipment 8: OLED display and membrane keyboard for configuration					
Z	Switching output/function OUT 1/IN: Pin 4 or black conductor L: IO-Link					
A	Switching output / function OUT 2/IN: pin 2 or white conductor A: Analog output 6: push-pull switching output, PNP light switching, NPN dark switching					
В	Switching output / function OUT 3/IN: Pin 5 X: pin not used 6: push-pull switching output, PNP light switching, NPN dark switching K: Multifunction input (factory setting: deactivation input)					

### Part number code



CCC Operating range

> 100: operating range 50 ... 100 mm 200: operating range 50 ... 200 mm 450: operating range 50 ... 450 mm 650: operating range 50 ... 650 mm 1050: operating range 50 ... 1050 mm

DDD **Electrical connection** M12: M12 connector

#### Note



♦ A list with all available device types can be found on the Leuze website at www.leuze.com.

### **Notes**



#### Observe intended use!



- This product is not a safety sensor and is not intended as personnel protection.
- \$ The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

### ATTENTION! LASER RADIATION - CLASS 2 LASER PRODUCT



#### Do not stare into beam!

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 2 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.

- 🔖 Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- b Do not point the laser beam of the device at persons!
- 🖖 Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- CAUTION! The use of operating and adjusting devices other than those specified here or the carrying out of differing procedures may lead to dangerous exposure to radiation!
- b Observe the applicable statutory and local laser protection regulations.
- The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG

### **NOTE**



### Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages

- "Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- 4 Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical

We reserve the right to make technical Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com changes

### **Accessories**



# Connection technology - Connection unit

Part no.	Designation	Article	Description
50144900	MD 798i-11-82/L5- 2222	IO-Link master	Type: IO-Link master Current consumption, max.: 11,000 mA Switching outputs for each sensor connection: 1 Piece(s) Switching output: Transistor, PNP Interface: IO-Link, Automatic protocol detection, EtherNet IP, Modbus TCP, PROFINET Connections: 12 Piece(s) Sensor connections: 8 Piece(s) Connections for voltage supply: 2 Piece(s) Interface connections: 2 Piece(s) Degree of protection: IP 67, IP 65, IP 69K

## Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50133855	KD S-M12-5A-V1-020	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 2.000 mm Sheathing material: PVC
	50133856	KD S-M12-5A-V1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PVC
	50132077	KD U-M12-5A-V1- 020	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 2.000 mm Sheathing material: PVC
	50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

# Mounting technology - Mounting brackets

Part no.	Designation	Article	Description
50118543	BT 300M.5	Mounting bracket	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type, Suited for M4 screws Type of mounting device: Adjustable Material: Stainless steel

The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2025-04-06

### **Accessories**



# Mounting technology - Rod mounts

	Part no.	Designation	Article	Description
	50117252	BTU 300M-D12	Mounting system	Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type, Suited for M4 screws Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal
40	50128380	BTU 460M-D12	Mounting system	Design of mounting device: Mounting system Fastening, at system: For 12 mm rod Mounting bracket, at device: Screw type Type of mounting device: Adjustable, Turning, 360° Material: Metal

# Configuration devices

	Part no.	Designation	Article	Description
Ties .	50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20



🔖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.