

# Technical data sheet Throughbeam photoelectric sensor receiver

Part no.: 50137183

LE3C.B1/6G-M8



## Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Further information
- Accessories













## **Technical data**



#### Basic data

| Series              | 3C                    |
|---------------------|-----------------------|
| Operating principle | Throughbeam principle |
| Device type         | Receiver              |

## **Optical data**

| Operating range       | 0.05 8.5 m                 |
|-----------------------|----------------------------|
| Operating range       | Guaranteed operating range |
| Operating range limit | 0.05 10 m                  |
| Operating range limit | Typical operating range    |

#### **Electrical data**

| Protective circuit            | Polarity reversal protection       |
|-------------------------------|------------------------------------|
|                               | Short circuit protected            |
|                               |                                    |
| Performance data              |                                    |
| Supply voltage U <sub>B</sub> | 10 30 V, DC, Incl. residual ripple |
| Residual ripple               | 0 15 %, From U <sub>B</sub>        |
| Open-circuit current          | 0 20 mΔ                            |

#### Outputs

Number of digital switching outputs 2 Piece(s)

## **Switching outputs**

| Voltage type            | DC                          |
|-------------------------|-----------------------------|
| Switching current, max. | 100 mA                      |
| Switching voltage       | high: ≥(U <sub>B</sub> -2V) |
|                         | low: ≤ 2 V                  |

## Switching output 1

| Assignment          | Connection 1, pin 4                        |
|---------------------|--|
| Switching element   | Transistor, Push-pull                      |
| Switching principle | Light switching (PNP)/dark switching (NPN) |
|                     |  |

## Switching output 2

| Assignment          | Connection 1, pin 2                        |
|---------------------|--|
| Switching element   | Transistor, Push-pull                      |
| Switching principle | Dark switching (PNP)/light switching (NPN) |

#### Time behavior

| Switching frequency | 1,000 Hz |
|---------------------|----------|
| Response time       | 0.5 ms   |
| Readiness delay     | 300 ms   |

#### Connection

| Connection 1       |                |
|--------------------|----------------|
| Function           | Signal OUT     |
|                    | Voltage supply |
| Type of connection | Connector      |
| Thread size        | M8             |
| Туре               | Male           |
| Material           | Metal          |
| No. of pins        | 4 -pin         |

#### Mechanical data

| Dimension (W x H x L)      | 11.4 mm x 34.2 mm x 18.3 mm  |
|----------------------------|------------------------------|
| Housing material           | Plastic                      |
| Plastic housing            | PC-ABS                       |
| Lens cover material        | Plastic / PMMA               |
| Net weight                 | 10 g                         |
| Housing color              | Red                          |
| Type of fastening          | Two M3 threaded sleeves      |
|                            | Via optional mounting device |
| Compatibility of materials | ECOLAB                       |

## **Operation and display**

| LED                    |
|------------------------|
| 2 Piece(s)             |
| 270° potentiometer     |
| Sensitivity adjustment |
|                        |

#### **Environmental data**

| Ambient temperature, operation | -40 60 °C |
|--------------------------------|-----------|
| Ambient temperature, storage   | -40 70 °C |

#### Certifications

| Degree of protection | IP 67         |
|----------------------|---------------|
|                      | IP 69K        |
| Protection class     | III           |
| Approvals            | c UL US       |
| Standards applied    | IEC 60947-5-2 |


## Classification

| 85365019 |
|----------|
| 27270901 |
| 27270901 |
| 27270901 |
| 27270901 |
| 27270901 |
| 27270901 |
| 27270901 |
| 27270901 |
| 27270901 |
| EC002716 |
|          |

## **Dimensioned drawings**

Leuze

All dimensions in millimeters

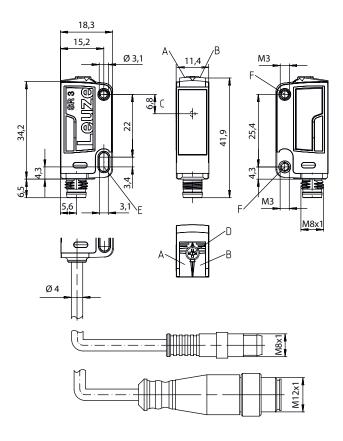

- Green LED
- Yellow LED В
- С Optical axis
- Е Mounting sleeve (standard)
- Threaded sleeve (3C.B series)

## **Electrical connection**

## **Connection 1**

| Function           | Signal OUT     |
|--------------------|----------------|
|                    | Voltage supply |
| Type of connection | Connector      |
| Thread size        | M8             |
| Туре               | Male           |
| Material           | Metal          |
| No. of pins        | 4 -pin         |

| Pin | Pin assignment |
|-----|----------------|
| 1   | V+             |
| 2   | OUT 2          |
| 3   | GND            |
| 4   | OUT 1          |




info@leuze.com • www.leuze.com


## **Diagrams**

## Leuze

## Typ. response behavior



- Distance [m]
- Misalignment [mm]



## **Operation and display**

| LED | Display                  | Meaning                              |
|-----|--------------------------|--------------------------------------|
| 1   | Green, continuous light  | Operational readiness                |
| 2   | Yellow, continuous light | Light path free                      |
|     | Yellow, flashing         | Light path free, no function reserve |

## Suitable transmitters

| Part no. | Designation  | Article                                      | Description   |  |
|----------|--------------|--|---|--|
| 50137174 | LS3C.B/8X-M8 | Throughbeam photoelectric sensor transmitter | Special version: Activation input Operating range limit: 0.05 10 m Light source: LED, Red Supply voltage: DC Connection: Connector, M8, Metal, 4 -pin |  |
| 50137172 | LS3C.B/XX-M8 | Throughbeam photoelectric sensor transmitter | Operating range limit: 0.05 10 m Light source: LED, Red Supply voltage: DC Connection: Connector, M8, Metal, 4 -pin                                   |  |

## Part number code

Part designation: AAA 3C d EE-f.GG H/i J-K

AAA3C Operating principle / construction

HT3C: Diffuse reflection sensor with background suppression LS3C: Throughbeam photoelectric sensor transmitter LE3C: Throughbeam photoelectric sensor receiver

PRK3C: Retro-reflective photoelectric sensor with polarization filter ODT3C: Distance diffuse sensor with background suppression

4/7

## Part number code



| d  | Light type n/a: red light l: infrared light  |
|----|--|
| EE | Light source n/a: LED L1: laser class 1 L2: laser class 2 PP: Power PinPoint LED   |
| f  | Preset range (optional) n/a: operating range acc. to data sheet xxxF: Preset range [mm] 2M: operating range of 2 meters  |
| GG | Equipment n/a: standard A: Autocollimation principle (single lens) for positioning tasks B: Housing model with two M3 threaded sleeves, brass F: Permanently set range L: Long light spot S: small light spot T: autocollimation principle (single lens) for highly transparent bottles without tracking TT: autocollimation principle (single lens) for highly transparent bottles with tracking V: V-optics XL: Extra long light spot X: extended model HF: Suppression of HF illumination (LED)   |
| н  | Operating range adjustment n/a with HT: range adjustable via 8-turn potentiometer n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable 1: 270° potentiometer 3: teach-in via button 6: auto-teach   |
| i  | Switching output/function OUT 1/IN: Pin 4 or black conductor  2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching 6: push-pull switching output, PNP light switching, NPN dark switching G: Push-pull switching output, PNP dark switching, NPN light switching L: IO-Link interface (SIO mode: PNP light switching, NPN dark switching) 8: activation input (activation with high signal) X: pin not used 1: IO-Link / light switching (NPN) / dark switching (PNP) |
| J  | Switching output / function OUT 2/IN: pin 2 or white conductor  2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching 6: push-pull switching output, PNP light switching, NPN dark switching G: Push-pull switching output, PNP dark switching, NPN light switching W: warning output X: pin not used 8: activation input (activation with high signal) 9: deactivation input (deactivation with high signal) T: teach-in via cable                                    |
| К  | Electrical connection n/a: cable, standard length 2000 mm, 4-wire 5000: cable, standard length 5000 mm, 4-wire M8: M8 connector, 4-pin (plug) M8.3: M8 connector, 3-pin (plug) 200-M8: cable, length 200 mm with M8 connector, 4-pin, axial (plug) 200-M8.3: cable, length 200 mm with M8 connector, 3-pin, axial (plug) 200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug)   |

info@leuze.com • www.leuze.com

## Note



 $\ ^{\mbox{\tiny $\mbox{$\psi$}}}$  A list with all available device types can be found on the Leuze website at www.leuze.com.

## **Notes**





## Observe intended use!



- \$ This product is not a safety sensor and is not intended as personnel protection.
- \$ The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

#### For UL applications:



- 🔖 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- 🖖 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

## **Further information**

- · The push-pull switching outputs must not be connected in parallel.
- Response time: For short decay times, an ohmic load of approx. 5kOhm is recommended
- Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40 °C

## **Accessories**

## Connection technology - Connection cables

|        | Part no. | Designation       | Article          | Description  |
|--------|----------|-------------------|------------------|--|
| W      | 50130850 | KD U-M8-4A-V1-050 | Connection cable | Connection 1: Connector, M8, Axial, Female, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5.000 mm<br>Sheathing material: PVC  |
| W<br>0 | 50130871 | KD U-M8-4W-V1-050 | Connection cable | Connection 1: Connector, M8, Angled, Female, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5.000 mm<br>Sheathing material: PVC |

## Mounting technology - Mounting brackets

| _ | Part no. | Designation | Article         | Description   |
|---|----------|-------------|-----------------|---|
|   | 50139831 | BT 205M     | Mounting device | Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Rigid<br>Material: Metal |

## **Accessories**



## Mounting technology - Rod mounts

|    | Part no. | Designation  | Article         | Description  |
|----|----------|--------------|-----------------|--|
| 00 | 50117829 | BTP 200M-D12 | Mounting system | Design of mounting device: Protection hood Fastening, at system: For 12 mm rod Mounting bracket, at device: Screw type Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal   |
|    | 50117255 | BTU 200M-D12 | Mounting system | Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type, Suited for M3 screws Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal |

## Note



🔖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.