

Technical data sheet Stationary bar code reader

Part no.: 50147474 BCL 658i SM 102



Leuze electronic GmbH + Co. KG The Sensor People In der Braike 1, D-73277 Owen/Germany

info@leuze.com • www.leuze.com changes Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2025-04-06

We reserve the right to make technical

Technical data

Basic data

Basic data		
Series	BCL 600i	
Functions		
Functions	Alignment mode	
	AutoConfig	
	AutoControl	
	AutoReflAct	
	Code fragment technology	In
	LED indicator	
	Reference code comparison	Ту
Characteristic parameters		
MTTF	42.4 years	_
Read data		
	2/E Interleaved	_
Code types, readable	2/5 Interleaved	
	Codabar	
	Code 128	S
	Code 39	
	Code 93	Ту
	EAN 128	
	EAN 8/13	
	EAN Addendum	
	GS1 Databar Expanded	
	GS1 Databar Limited	
	GS1 Databar Omnidirectional	С
	UPC	N
Scanning rate, typical	1,000 scans/s	
Bar codes per reading gate, max. number	64 Piece(s)	
Optical data		
Reading distance	400 900 mm	
Light source	Laser, Blue	
Wavelength	405 nm	
Laser class	2, IEC/EN 60825-1:2014	
Fransmitted-signal shape	Continuous	
Usable opening angle (reading field opening)	60 °	
Bar code contrast (PCS)	60 %	
Modulus size	0.25 0.35 mm	
Reading method	Line scanner	
Beam deflection	Via rotating polygon wheel	
Light beam exit	Front	
Electrical data		
Protective circuit	Polarity reversal protection	
Performance data		
Supply voltage U _B	10 30 V, DC	
Power consumption, max.	14 W	

Inputs/outputs selectable	
Output current, max.	60 mA
Number of inputs/outputs selectabl	e 4 Piece(s)
Voltage type, outputs	DC
Switching voltage, outputs	Тур. U _B / 0 V
Voltage type, inputs	DC
Switching voltage, inputs	Тур. U _в / 0 V
Input current, max.	8 mA
Interface	
Туре	EtherNet IP
EtherNet IP	
Address assignment	DHCP
	Manual address assignment
Function	Process
Switch functionality	Integrated
Transmission speed	10 Mbit/s
	100 Mbit/s
Operation Inter (
Service interface	
Туре	USB
USB	
Function	Configuration via software
	Service
Connection	
Number of connections	5 Piece(s)
Number of connections	5 Piece(s)
Number of connections Connection 1	5 Piece(s)
	5 Piece(s) Service interface
Connection 1	
Connection 1 Function	Service interface
Connection 1 Function Type of connection	Service interface USB
Connection 1 Function Type of connection Designation on device	Service interface USB SERVICE
Connection 1 Function Type of connection Designation on device	Service interface USB SERVICE
Connection 1 Function Type of connection Designation on device Connector type	Service interface USB SERVICE
Connection 1 Function Type of connection Designation on device Connector type Connection 2	Service interface USB SERVICE USB 2.0 Standard-A
Connection 1 Function Type of connection Designation on device Connector type Connection 2	Service interface USB SERVICE USB 2.0 Standard-A Signal IN
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector PWR
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector PWR MIN / OUT
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size Type of connection Designation on device Thread size Type Material	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector PWR M12 M12 Male Male
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded PWR / SW IN / OUT Connector PWR MIN/OUT

Leuze

Technical data

Connection 4 BUS IN Function Type of connection Connector HOST / BUS IN Designation on device Thread size M12 Туре Female Material Metal No. of pins 4 -pin Encoding D-coded **Connection 5** BUS OUT Function Type of connection Connector BUS OUT Designation on device Thread size M12

Female

4 -pin

Mechanical data

Type No. of pins

Design	Cubic
Dimension (W x H x L)	123.5 mm x 63 mm x 104.2 mm
Housing material	Metal
Metal housing	Diecast aluminum
Lens cover material	Glass
Net weight	1,400 g
Housing color	Red
	Silver
Type of fastening	Dovetail grooves
	Mounting thread
	Via optional mounting device

Operation and display

Type of display	LED
	Monochromatic graphical display, 128x64 pixel, with background lighting
Number of LEDs	2 Piece(s)
Type of configuration	Via web browser
Operational controls	Button(s)
	Via service interface

Environmental data

Ambient temperature, operation	0 40 °C
Ambient temperature, storage	-20 70 °C
Relative humidity (non-condensing)	90 %
Extraneous light tolerance on the bar code, max.	2,000 lx

Leuze

Certifications

Degree of protection	IP 65
Protection class	III
Approvals	c UL US
Test procedure for EMC in accordance	EN 55022
with standard	EN 61000-4-2, -3, -4, -6
	EN 61000-6-2
Test procedure for shock in accordance with standard	IEC 60068-2-27, test Ea
Test procedure for continuous shock in accordance with standard	IEC 60068-2-29, test Eb
Test procedure for vibration in accordance with standard	IEC 60068-2-6, test Fc


Classification


Customs tariff number	84719000
ECLASS 5.1.4	27280102
ECLASS 8.0	27280102
ECLASS 9.0	27280102
ECLASS 10.0	27280102
ECLASS 11.0	27280102
ECLASS 12.0	27280102
ECLASS 13.0	27280102
ECLASS 14.0	27280102
ECLASS 15.0	27280102
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550
ETIM 8.0	EC002550
ETIM 9.0	EC002550
ETIM 10.0	EC002550


Dimensioned drawings

All dimensions in millimeters







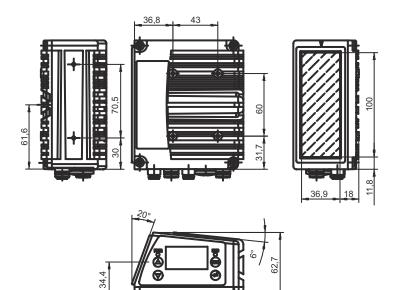

104,2

Electrical connection

Connection 1	
--------------	--

SERVICE

Function	Service interface
Type of connection	USB
Connector type	USB 2.0 Standard-A

Pin Pin assignment

1	+5 V DC
2	DATA-
3	DATA+
4	GND

Electrical connection

Connection 2


SW IN/OUT

Function	Signal IN
	Signal OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	VOUT
2	SWIO 1
3	GND
4	SWIO 2
5	FE

PWR



Connection 3

Function	PWR / SW IN / OUT
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	VIN
2	SWIO 3
3	GND
4	SWIO 4
5	FE


HOST / BUS IN

Connection 4


Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded
	5 00000

Pin Pin assignment

1	TD+		
2	RD+		
3	TD-		
4	RD-		








Leuze

Electrical connection

BUS OUT

Function	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded

Pin assignment
TD+
RD+
TD-
RD-




Leuze

Diagrams

Connection 5

Reading field curve - Medium Density

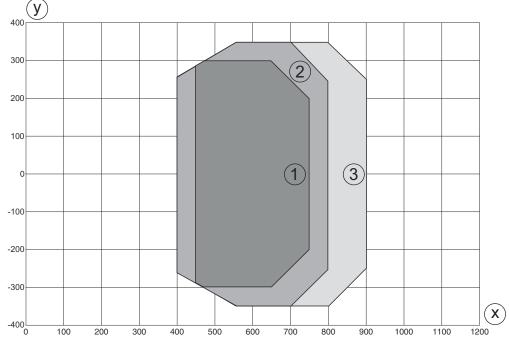

y Reading field width [mm]

x Reading field distance [mm]

1	Module = 0.25 mm: 450 mm - 750 mm (300 mm depth of field)
---	---

2 Module = 0.3 mm: 400 mm - 800 mm (400 mm depth of field)

3 Module = 0.35 mm: 400 mm - 900 mm (500 mm depth of field)

Operation and display LED Display

Meaning

1 P	PWR	Off	No supply voltage
		Green, flashing	Initialization
		Green, continuous light	Device OK

Operation and display

Leuze

LE	D	Display	Meaning
1	PWR	Orange, flashing	Service operation
		Orange, continuous light	Reset
		Red, flashing	Device OK, warning set
		Red, continuous light	Device error
2	NET	Off	No supply voltage
		Green, flashing	BUS initialization
		Green, continuous light	Bus operation ok
		Orange, flashing	Service mode
		Orange, continuous light	Reset
		Red, flashing	Communication error
		Red, continuous light	Network error

Part number code

Part designation: BCL XXXX YYZ AAA B

BCL	Operating principle BCL: bar code reader
XXXX	Series/interface (integrated fieldbus technology) 600i: RS 232/RS 422/ RS 485 (multiNet master) 601i: RS 485 (multiNet slave) 604i: PROFIBUS DP 608i: Ethernet 648i: PROFINET 658i: EtherNet/IP
YY	Scanning principle S: line scanner (single line) O: oscillating-mirror scanner (oscillating mirror)
z	Optics N: High Density (close) M: Medium Density (medium distance) F: Low Density (remote) L: Long Range (very large distances)
AAA	Beam exit 100: lateral 102: front
BB	Special equipment H: with heating
Note	
A list wi	ith all available device types can be found on the Leuze website at www.leuze.com.

Notes

	Observe intended use!
	this product is not a safety sensor and is not intended as personnel protection.
	the product may only be put into operation by competent persons.
•	∜ Only use the product in accordance with its intended use.

Notes

Leuze

ATTENTION! LASER RADIATION – CLASS 2 LASER PRODUCT
Do not stare into beam! The device satisfies the requirements of IEC/EN 60825-1:2014 safety regulations for a product of laser class 2 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 56 from May 08, 2019.
Solution Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
✤ Do not point the laser beam of the device at persons!
& Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
& When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
S CAUTION! The use of operating and adjusting devices other than those specified here or the carrying out of differing procedures may lead to dangerous exposure to radiation!
to Observe the applicable statutory and local laser protection regulations.
 ^t The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

NOTE

- Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- ♦ Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50107726	KB USB A - USB A	Interconnection cable	Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,800 mm Sheathing material: PVC

Accessories

Leuze

	Part no.	Designation	Article	Description
	50137078	KSS ET-M12-4A- M12-4A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Other

 Part no.	Designation	Article	Description
50111224	BT 59	Mounting bracket	Fastening, at system: Groove mounting Mounting bracket, at device: Clampable Material: Metal Shock absorber: No

Services

	Part no.	Designation	Article	Description
₽ ©	S981020	CS30-E-212	Hourly rate	Details: Compilation of the application data, selection and suggestion of suitable sensor system, drawing prepared as assembly sketch. Conditions: Completed questionnaire or project specifications with a description of the application have been provided.
	S981014	CS30-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981019	CS30-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.
	S981021	CS30-V-212	Hourly rate	Details: REA evaluation with creation of a test report, evaluation of the code quality. Conditions: Original bar codes to be provided by the client.

Accessories

Leuze



♦ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.