

## **Technical data sheet Light curtain receiver** Part no.: 50119832 CML720i-R05-2960.A/CV-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2024-06-21

### **Technical data**

#### Basic data

720
Throughbeam principle
Receiver
2x BT-NC sliding block
Object measurement
Crossed-beam scanning
Diagonal-beam scanning
Parallel-beam scanning
Ŭ
0.1 3.5 m
Guaranteed operating range
0.1 4.5 m
Typical operating range
2,960 mm
592 Piece(s)
5 mm
10 mm
Polarity reversal protection
Polarity reversal protection Short circuit protected
Transient protection
Transient protection
18 30 V, DC
0 15 %, From U <sub>B</sub>
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans-
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans-
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 600 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>2 Piece(s)</li> </ul>
<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>Analog output</li> </ul>
<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> </ul>
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V
<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.</li> <li>2 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> </ul>
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω e 2 Piece(s)
<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 600 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>2 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> <li>0 11 V</li> <li>Voltage</li> <li>Current</li> <li>100 mA</li> <li>6,000 Ω</li> <li>e 2 Piece(s)</li> <li>Inputs/outputs selectable</li> </ul>
<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 600 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>2 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> <li>0 11 V</li> <li>Voltage</li> <li>Current</li> <li>100 mA</li> <li>6,000 Ω</li> <li>2 Piece(s)</li> <li>Inputs/outputs selectable</li> <li>DC</li> </ul>
<ul> <li>0 15 %, From U<sub>B</sub></li> <li>0 600 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>2 Piece(s)</li> <li>Analog output</li> <li>0 24 mA</li> <li>0 11 V</li> <li>Voltage</li> <li>Current</li> <li>100 mA</li> <li>6,000 Ω</li> <li>e 2 Piece(s)</li> <li>Inputs/outputs selectable</li> <li>DC</li> <li>Typ. U<sub>B</sub> / 0 V</li> </ul>
0 15 %, From $U_B$ 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 $\Omega$ e 2 Piece(s) Inputs/outputs selectable DC Typ. $U_B / 0 V$ DC
0 15 %, From U <sub>B</sub> 0 600 mA, The specified values refer to the entire package consisting of trans- mitter and receiver. 2 Piece(s) Analog output 0 24 mA 0 11 V Voltage Current 100 mA 6,000 Ω e 2 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V

	Input/output 1			
	Activation/disable delay	1 ms		
Tim	ne behavior			
		450		
	idiness delay	450 ms		
	le time	18.16 ms		
Res	ponse time per beam	30 µs		
Ser	vice interface			
Тур	e	IO-Link		
10	O-Link			
	unction	Configuration via software		
		Service		
Сог	nnection			
Nun	nber of connections	2 Piece(s)		
Plug	g outlet	Axial		
	-			
	Connection 1			
F	unction	Configuration interface		
		Signal IN		
		Signal OUT		
		Voltage supply		
T	ype of connection	Connector		
Т	hread size	M12		
T	уре	Male		
N	/laterial	Metal		
N	lo. of pins	8 -pin		
E	incoding	A-coded		
~	Connection 2			
	Function	Connection to transmitter		
	ype of connection	Connector		
	hread size	M12		
-	ype	Female		
	/aterial	Metal		
	lo. of pins	5 -pin		
	Encoding	A-coded		
	chanical data			
	sign	Cubic		
	nension (W x H x L)	29 mm x 35.4 mm x 3,035 mm		
	using material	Metal		
	al housing	Aluminum		
	s cover material	Plastic		
	weight	3,000 g		
	ising color	Silver		
Тур	e of fastening	Groove mounting Via optional mounting device		
		via optional moduling device		
Ор	eration and display			
Тур	e of display	LED		
		OLED display		
	nber of LEDs	2 Piece(s)		
Nun		Oefficient		
	e of configuration	Software		
	e of configuration	Teach-in		

Leuze

### **Technical data**

# Leuze

#### **Environmental data**

Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C
Certifications	


Degree of protection	IP 65	
Protection class	III	
Certifications	c UL US	
Standards applied	IEC 60947-5-2	

#### Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549

### **Dimensioned drawings**

All dimensions in millimeters

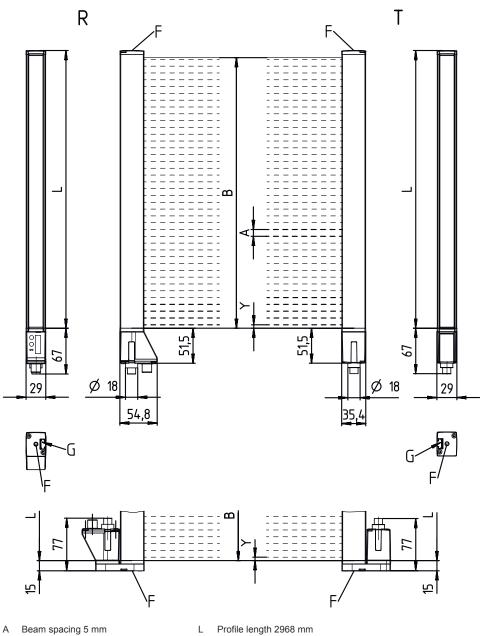

- Beam spacing 5 mm А
- В Measurement field length 2960 mm
- F M6 thread G
  - Fastening groove
- R Receiver

Т


Transmitter

2.5 mm Υ

Leuze

### **Dimensioned drawings**



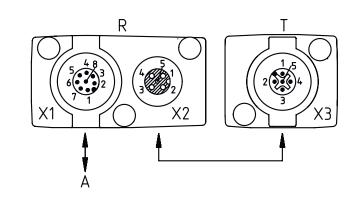

A PWR / SW IN / OUT


### **Electrical connection**

**Connection 1** 

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	OUT V		
7	OUT mA		
8	AGND		




#### **Connection 2**

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

#### Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



## Operation and display

LED 1

2

ration and display		Leuze
	Display	Meaning
	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

### Suitable transmitters

 Part no.	Designation	Article	Description
50119404	CML720i-T05- 2960.A-M12	Light curtain transmitter	Operating range: 0.1 3.5 m Connection: Connector, M12, Axial, 5 -pin

#### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series           720i: 720i series         730i: 730i series
Y	Device type T: transmitter R: receiver
22	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note & A list wi	th all available device types can be found on the Leuze website at www.leuze.com.

#### Notes

#### Observe intended use!

This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$  The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$  Only use the product in accordance with its intended use.

	For UL applications:
A	<ul> <li>For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).</li> <li>These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)</li> </ul>

#### Accessories

#### Connection technology - Connection cables

	Part no.	Designation	Article	Description
Ŭ	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

#### Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

#### Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
1 + 1 + + + + + + + + + + + + + + + + +	50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Leuze

#### Accessories

# Leuze

### Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

#### Services

	Part no.	Designation	Article	Description
ц.	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
A	s A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.