

## Technical data sheet

### Safety light curtain receiver

Part no.: 68002139

MLC520R14-900/V



For illustration purposes only

#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Circuit diagrams
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories



Technical data

Basic data

|             |                        |
|-------------|------------------------|
| Series      | MLC 500                |
| Device type | Receiver               |
| Contains    | 2x BT-NC sliding block |
| Application | Finger protection      |

Functions

|                  |                                  |
|------------------|----------------------------------|
| Function package | Standard                         |
| Functions        | Configuration by means of wiring |
|                  | Contactormonitoring (EDM)        |
|                  | Start/restart interlock (RES)    |
|                  | Transmission channel changeover  |

Characteristic parameters

|                             |                          |
|-----------------------------|--------------------------|
| Type                        | 4, IEC/EN 61496          |
| SIL                         | 3, IEC 61508             |
| SILCL                       | 3, IEC/EN 62061          |
| Performance Level (PL)      | e, EN ISO 13849-1        |
| PFH <sub>D</sub>            | 7.73E-09 per hour        |
| Mission time T <sub>M</sub> | 20 years, EN ISO 13849-1 |
| Category                    | 4, EN ISO 13849          |

Protective field data

|                         |        |
|-------------------------|--------|
| Resolution              | 14 mm  |
| Protective field height | 900 mm |

Optical data

|                 |                                          |
|-----------------|------------------------------------------|
| Synchronization | Optical between transmitter and receiver |
|-----------------|------------------------------------------|

Electrical data

|                    |                         |
|--------------------|-------------------------|
| Protective circuit | Overvoltage protection  |
|                    | Short circuit protected |

Performance data

|                               |                        |
|-------------------------------|------------------------|
| Supply voltage U <sub>B</sub> | 24 V, DC, -20 ... 20 % |
| Current consumption, max.     | 150 mA                 |
| Fuse                          | 2 A semi time-lag      |

Inputs

|                                    |            |
|------------------------------------|------------|
| Number of digital switching inputs | 3 Piece(s) |
|------------------------------------|------------|

Switching inputs

|                              |                         |
|------------------------------|-------------------------|
| Type                         | Digital switching input |
| Switching voltage high, min. | 18 V                    |
| Switching voltage low, max.  | 2.5 V                   |
| Switching voltage, typ.      | 22.5 V                  |
| Voltage type                 | DC                      |

Outputs

|                                                    |            |
|----------------------------------------------------|------------|
| Number of safety-related switching outputs (OSSDs) | 2 Piece(s) |
|----------------------------------------------------|------------|

Safety-related switching outputs

|                              |                                      |
|------------------------------|--------------------------------------|
| Type                         | Safety-related switching output OSSD |
| Switching voltage high, min. | 18 V                                 |
| Switching voltage low, max.  | 2.5 V                                |
| Switching voltage, typ.      | 22.5 V                               |
| Voltage type                 | DC                                   |
| Current load, max.           | 380 mA                               |
| Load inductivity             | 2,000 µH                             |
| Load capacity                | 0.3 µF                               |
| Residual current, max.       | 0.2 mA                               |
| Residual current, typ.       | 0.002 mA                             |
| Voltage drop                 | 1.5 V                                |

Safety-related switching output 1

|                   |                     |
|-------------------|---------------------|
| Assignment        | Connection 1, pin 5 |
| Switching element | Transistor, PNP     |

Safety-related switching output 2

|                   |                     |
|-------------------|---------------------|
| Assignment        | Connection 1, pin 6 |
| Switching element | Transistor, PNP     |

Time behavior

|                    |        |
|--------------------|--------|
| Response time      | 20 ms  |
| Restart delay time | 100 ms |

Connection

|                       |            |
|-----------------------|------------|
| Number of connections | 1 Piece(s) |
|-----------------------|------------|

Connection 1

|                    |                   |
|--------------------|-------------------|
| Function           | Machine interface |
| Type of connection | Connector         |
| Thread size        | M12               |
| Material           | Metal             |
| No. of pins        | 8 -pin            |

Cable properties

|                                            |                      |
|--------------------------------------------|----------------------|
| Permissible conductor cross section, typ.  | 0.25 mm <sup>2</sup> |
| Length of connection cable, max.           | 100 m                |
| Permissible cable resistance to load, max. | 200 Ω                |

Mechanical data

|                       |                           |
|-----------------------|---------------------------|
| Dimension (W x H x L) | 29 mm x 966 mm x 35.4 mm  |
| Housing material      | Metal                     |
| Metal housing         | Aluminum                  |
| Lens cover material   | Plastic / PMMA            |
| Material of end caps  | Diecast zinc              |
| Net weight            | 1,050 g                   |
| Housing color         | Yellow, RAL 1021          |
| Type of fastening     | Groove mounting           |
|                       | Mounting brackets         |
|                       | Mounting on Device Column |
|                       | Swivel mount              |

Operation and display

|                 |                   |
|-----------------|-------------------|
| Type of display | 7-segment display |
|                 | LED               |
| Number of LEDs  | 2 Piece(s)        |

Technical data

Environmental data

|                                    |               |
|------------------------------------|---------------|
| Ambient temperature, operation     | 0 ... 55 °C   |
| Ambient temperature, storage       | -30 ... 70 °C |
| Relative humidity (non-condensing) | 0 ... 95 %    |

Certifications

|                      |                |
|----------------------|----------------|
| Degree of protection | IP 65          |
| Protection class     | III            |
| Certifications       | c TÜV NRTL US  |
|                      | c UL US        |
|                      | S Mark         |
|                      | TÜV Süd        |
| Vibration resistance | 200 m/s²       |
| Shock resistance     | 400 m/s²       |
| US patents           | US 6,418,546 B |


Classification

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| ECLASS 5.1.4          | 27272704 |
| ECLASS 8.0            | 27272704 |
| ECLASS 9.0            | 27272704 |
| ECLASS 10.0           | 27272704 |
| ECLASS 11.0           | 27272704 |
| ECLASS 12.0           | 27272704 |
| ECLASS 13.0           | 27272704 |
| ECLASS 14.0           | 27272704 |
| ETIM 5.0              | EC002549 |
| ETIM 6.0              | EC002549 |
| ETIM 7.0              | EC002549 |
| ETIM 8.0              | EC002549 |
| ETIM 9.0              | EC002549 |

Dimensioned drawings

All dimensions in millimeters

Calculation of the effective protective field height  $H_{PFE} = H_{PFN} + B + C$

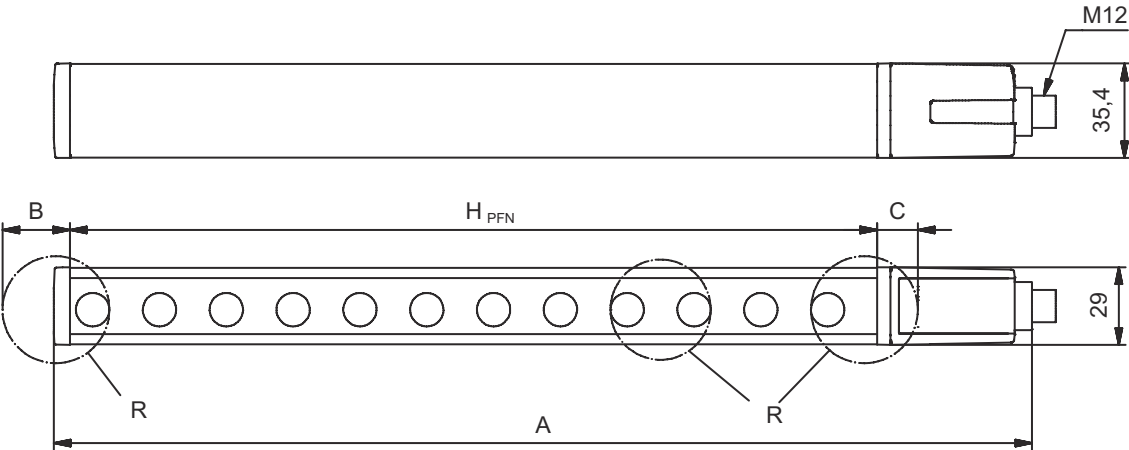

- $H_{PFE}$  Effective protective field height = 912 mm

$H_{PFN}$  Nominal protective field height = 900 mm

A Total height = 966 mm

B 6 mm
- C 6 mm

R Effective protective field height  $H_{PFE}$  goes beyond the dimensions of the optics area to the outer borders of the circles labeled with R.


Electrical connection

Connection 1

|                    |                   |
|--------------------|-------------------|
| Function           | Machine interface |
| Type of connection | Connector         |
| Thread size        | M12               |
| Type               | Male              |
| Material           | Metal             |
| No. of pins        | 8 -pin            |
| Encoding           | A-coded           |
| Connector housing  | FE/SHIELD         |


Electrical connection

| Pin | Pin assignment | Conductor color |
|-----|----------------|-----------------|
| 1   | IO1            | White           |
| 2   | VIN1           | Brown           |
| 3   | IN3            | Green           |
| 4   | IN4            | Yellow          |
| 5   | OSSD1          | Gray            |
| 6   | OSSD2          | Pink            |
| 7   | VIN2           | Blue            |
| 8   | IN8            | Red             |




Circuit diagrams

Connection diagram receiver

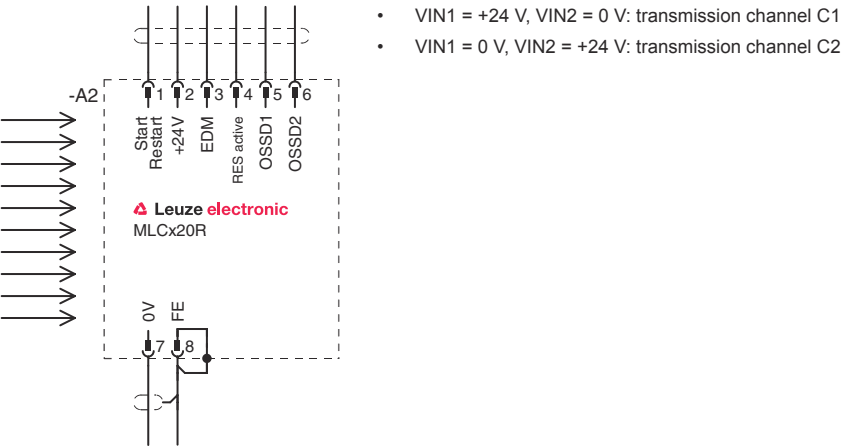

Circuit diagram example with downstream MSI-RM2 safety relay

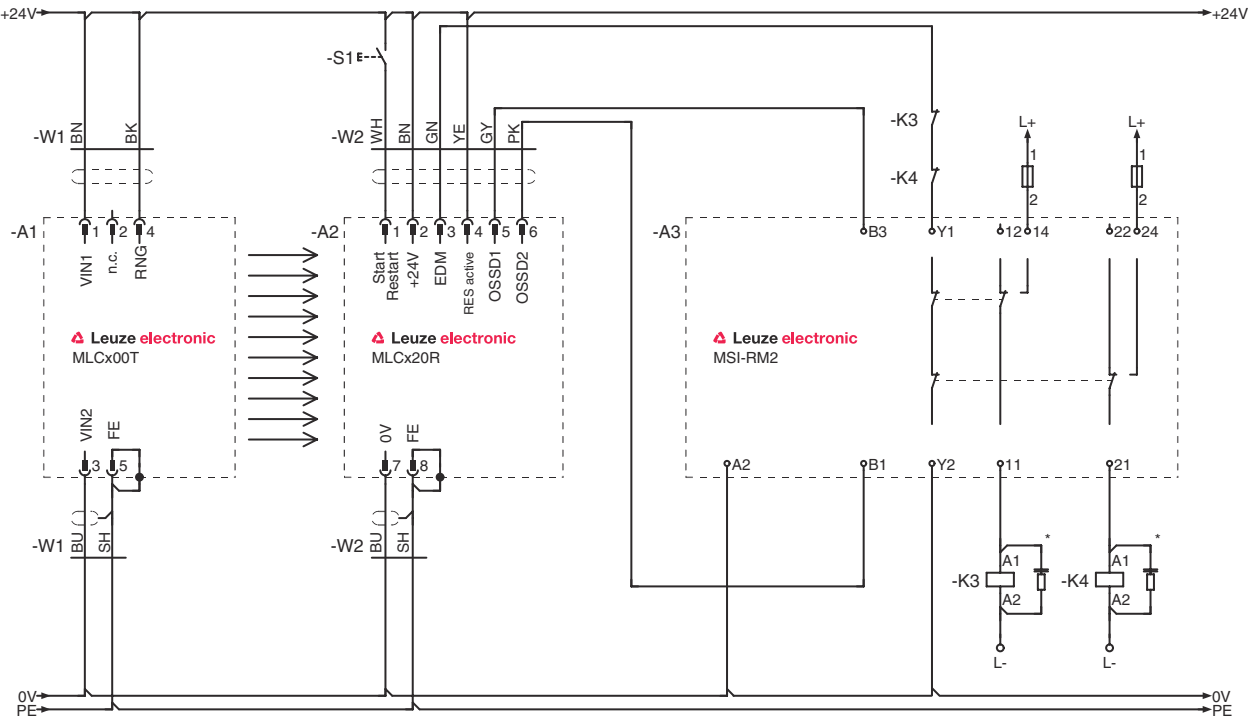

Operation and display

| LED | Display                  | Meaning                                                                                                               |
|-----|--------------------------|-----------------------------------------------------------------------------------------------------------------------|
| 1   | Off                      | Device switched off                                                                                                   |
|     | Red, continuous light    | OSSD off                                                                                                              |
|     | Red, flashing, 1 Hz      | External error                                                                                                        |
|     | Red, flashing, 10 Hz     | Internal error                                                                                                        |
|     | Green, flashing, 1 Hz    | OSSD on, weak signal                                                                                                  |
|     | Green, continuous light  | OSSD on                                                                                                               |
| 2   | Off                      | RES deactivated or RES activated and enabled or RES blocked and protective field interrupted                          |
|     | Yellow, continuous light | RES activated and blocked but ready to be unlocked - protective field free and linked sensor is enabled if applicable |

Suitable transmitters

|                                                                                   | Part no. | Designation     | Article                          | Description                                                                                                                     |
|-----------------------------------------------------------------------------------|----------|-----------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
|  | 68000139 | MLC500T14-900/V | Safety light curtain transmitter | Resolution: 14 mm<br>Protective field height: 900 mm<br>Operating range: 0 ... 6 m<br>Connection: Connector, M12, Metal, 5 -pin |

Part number code

Part designation: MLCxyy-za-hhhh-ei-ooo

| MLC  | Safety light curtain                                                                                                                                                                                                                                                                        |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| x    | <b>Series</b><br>3: MLC 300<br>5: MLC 500                                                                                                                                                                                                                                                   |
| yy   | <b>Function classes</b><br>00: transmitter<br>01: transmitter (AIDA)<br>02: transmitter with test input<br>10: basic receiver - automatic restart<br>11: basic receiver - automatic restart (AIDA)<br>20: standard receiver - EDM/RES selectable<br>30: extended receiver - blanking/muting |
| z    | <b>Device type</b><br>T: transmitter<br>R: receiver                                                                                                                                                                                                                                         |
| a    | <b>Resolution</b><br>14: 14 mm<br>20: 20 mm<br>30: 30 mm<br>40: 40 mm<br>90: 90 mm                                                                                                                                                                                                          |
| hhhh | <b>Protective field height</b><br>150 ... 3000: from 150 mm to 3000 mm                                                                                                                                                                                                                      |
| e    | <b>Host/Guest (optional)</b><br>H: Host<br>MG: Middle Guest<br>G: Guest                                                                                                                                                                                                                     |

Part number code

|                                                                                  |                                                                                                                                |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| MLC                                                                              | Safety light curtain                                                                                                           |
| i                                                                                | Interface (optional)<br>/A: AS-i                                                                                               |
| ooo                                                                              | Option<br>/V: high Vibration-proof<br>EX2: explosion protection (zones 2 + 22)<br>SPG: Smart Process Gating                    |
| Note                                                                             |                                                                                                                                |
|  | A list with all available device types can be found on the Leuze website at <a href="http://www.leuze.com">www.leuze.com</a> . |

Notes

|                                                                                                         |                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Observe intended use! |                                                                                                                                                                                    |
|                         | <ul style="list-style-type: none"><li>The product may only be put into operation by competent persons.</li><li>Only use the product in accordance with its intended use.</li></ul> |

Accessories

Connection technology - Connection cables

|                                                                                     | Part no. | Designation        | Article          | Description                                                                                                                                                                        |
|-------------------------------------------------------------------------------------|----------|--------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50135128 | KD S-M12-8A-P1-050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: Yes<br>Cable length: 5.000 mm<br>Sheathing material: PUR |

Mounting technology - Swivel mounts

|                                                                                    | Part no. | Designation | Article              | Description                                                                                                                                                 |
|------------------------------------------------------------------------------------|----------|-------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 429393   | BT-2HF      | Mounting bracket set | Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Clampable<br>Type of mounting device: Turning, 360°<br>Material: Metal, Plastic |

Accessories

Services

|                                                                                  | Part no. | Designation | Article           | Description                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------|----------|-------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | S981050  | CS40-I-140  | Safety inspection | Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application.<br>Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. |
|  | S981046  | CS40-S-140  | Start-up support  | Details: For safety devices including stopping time measurement and initial inspection.<br>Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.                                                                                                                                         |

| Note                                                                             |                                                                                                                                  |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
|  | <p>A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.</p> |