

Technical data sheet Light curtain receiver Part no.: 50123110 CML730i-R05-240.A/PB-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

We reserve the right to make technical changes

Technical data

Leuze

	730
Series Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Detection of transparent objects
Application	Object measurement
Special version	
Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
	r draiter bearn searning
Optical data	
Operating range	0.1 4.5 m
Operating range	Guaranteed operating range
Operating range, transparent media	0.1 1.75 m
Operating range limit	0.1 6 m
Operating range limit	Typical operating range
Measurement field length	240 mm
Number of beams	48 Piece(s)
Beam spacing	5 mm
Douni opaonig	
Measurement data	
Minimum object diameter	10 mm
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U _B	18 30 V, DC
Residual ripple	0 15 %, From U _B
Open-circuit current	0 165 mA, The specified values refer to the entire package consisting of trans mitter and receiver.
Inputs/outputs selectable	
Output current, max.	100 mA
Output current, max. Input resistance	6,000 Ω
Output current, max. Input resistance Number of inputs/outputs selectable	6,000 Ω 2 Piece(s)
Output current, max. Input resistance Number of inputs/outputs selectable Type	6,000 Ω 2 Piece(s) Inputs/outputs selectable
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	6,000 Ω 2 Piece(s) Inputs/outputs selectable DC
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V
Output current, max.Input resistanceNumber of inputs/outputs selectableTypeVoltage type, outputsSwitching voltage, outputsVoltage type, inputs	6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	$6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: 26V
Output current, max.Input resistanceNumber of inputs/outputs selectableTypeVoltage type, outputsSwitching voltage, outputsVoltage type, inputs	6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	$6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: 26V
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	$6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: $\geq 6V$ Iow: $\leq 4 V$
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	$6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: 26V
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	$6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: $\geq 6V$ Iow: $\leq 4 V$
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	$6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: $\geq 6V$ Iow: $\leq 4 V$
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	$6,000 \Omega$ 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤ 4 V 1 ms
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior Cycle time	6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤ 4 V 1 ms 1 ms

PROFIBUS DP	
Function	Process
Service interface	
Гуре	IO-Link
IO-Link	
Function	Configuration via software
	Service
Connection	
Number of connections	2 Piece(s)
Plug outlet	Axial
Connection 1 Function	Configuration interface
Function	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
Connection 2 Function	BUS IN
T unction	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	B-coded
Mechanical data	
Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 315 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Plastic
Net weight	450 g
Housing color	Silver
Type of fastening	Groove mounting
	Via optional mounting device
Operation and display	
Type of display	LED
	OLED display
Number of LEDs	2 Piece(s)
Type of configuration	Software
Operational controls	Teach-in Mombrana kaybaard
Operational controls	Membrane keyboard
Environmental data	
Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C

Technical data

Leuze

Certifications


Degree of protection	IP 65
Protection class	III
Approvals	c UL US
Standards applied	IEC 60947-5-2

Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ECLASS 15.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549

Dimensioned drawings

All dimensions in millimeters

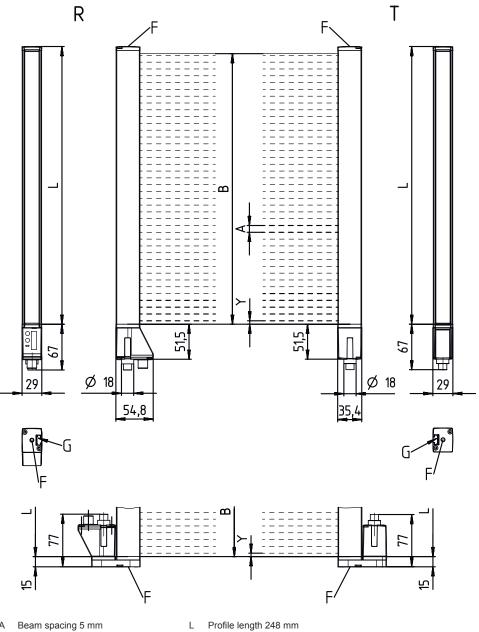

Beam spacing 5 mm А

- В Measurement field length 240 mm
- F M6 thread

G

- Fastening groove
- R Receiver 2.5 mm Υ

Т


Transmitter

We reserve the right to make technical Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com changes The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2025-04-04

Leuze

Dimensioned drawings





A PWR / SW IN / OUTB BUS IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	RS 485 Tx+		
7	RS 485 Tx+		
8	FE/SHIELD		



Connection 2

Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	B-coded

Electrical connection

Pin Pin assignment 1 V+ 2 Tx 3 PB GND 4 Tx+ 5 FE/SHIELD

Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

 Part no.	Designation	Article	Description
50118578	CML730i-T05-240.A- M12	Light curtain transmitter	Operating range: 0.1 4 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series 720i: 720i series 730i: 730i series
Y	Device type T: transmitter R: receiver
22	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus



Part number code



DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
	Note
A	∜ A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes

Observe intended use!
 This product is not a safety sensor and is not intended as personnel protection. The product may only be put into operation by competent persons. Only use the product in accordance with its intended use.



For UL applications:

 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR

Accessories

Leuze

Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Configuration devices

	Part no.	Designation	Article	Description
165	50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

Note

the A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.