

## Technical data sheet

## Throughbeam photoelectric sensor receiver set

Part no.: 50136463

SET LE46C/4P-M12+BTU46.25



For illustration purposes only

### Contents

- Set consists of
- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Further information
- Accessories



## Set consists of

|                                                                                   | Quantity | Part no. | Designation  | Article                                   | Description                                                                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------|----------|----------|--------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 1        | 50127033 | LE46C/4P-M12 | Throughbeam photoelectric sensor receiver | Supply voltage: DC<br>Digital switching outputs: 2 Piece(s)<br>Switching output 1: Transistor, PNP, Light switching<br>Switching output 2: Transistor, PNP, Dark switching<br>Switching frequency: 500 Hz<br>Connection: Connector, M12, Plastic, 4 -pin |

## Technical data

## Basic data

|                     |                                                                     |
|---------------------|---------------------------------------------------------------------|
| Series              | 46C                                                                 |
| Operating principle | Throughbeam principle                                               |
| Device type         | Receiver                                                            |
| Contains            | 1x rod mount, diameter of 12 mm BTU 046M.25-D12<br>2x M4 x 25 screw |
| Pre-mounted on      | Mounting system                                                     |

## Optical data

|                       |                                            |
|-----------------------|--------------------------------------------|
| Operating range       | 0.5 ... 120 m (guaranteed operating range) |
| Operating range limit | 0 ... 150 m (typical operating range)      |

## Electrical data

|                      |                                                                                 |
|----------------------|---------------------------------------------------------------------------------|
| Protective circuit   | Polarity reversal protection<br>Short circuit protected<br>Transient protection |
| Performance data     |                                                                                 |
| Supply voltage $U_B$ | 10 ... 30 V, DC, Incl. residual ripple                                          |
| Residual ripple      | 0 ... 15 %, From $U_B$                                                          |
| Open-circuit current | 0 ... 20 mA                                                                     |

## Outputs

|                                     |                                           |
|-------------------------------------|-------------------------------------------|
| Number of digital switching outputs | 2 Piece(s)                                |
| Switching outputs                   |                                           |
| Type                                | Digital switching output                  |
| Voltage type                        | DC                                        |
| Switching current, max.             | 100 mA                                    |
| Switching voltage                   | high: $\geq(U_B - 2V)$<br>low: $\leq 2 V$ |
| Switching output 1                  |                                           |
| Assignment                          | Connection 1, pin 4                       |
| Switching element                   | Transistor, PNP                           |
| Switching principle                 | Light switching                           |
| Switching output 2                  |                                           |
| Assignment                          | Connection 1, pin 2                       |
| Switching element                   | Transistor, PNP                           |
| Switching principle                 | Dark switching                            |

## Time behavior

|                     |        |
|---------------------|--------|
| Switching frequency | 500 Hz |
| Response time       | 1 ms   |
| Readiness delay     | 300 ms |

## Connection

|                       |                              |
|-----------------------|------------------------------|
| Number of connections | 1 Piece(s)                   |
| Connection 1          |                              |
| Function              | Signal OUT<br>Voltage supply |
| Type of connection    | Connector                    |
| Thread size           | M12                          |
| Type                  | Male                         |
| Material              | Plastic                      |
| No. of pins           | 4 -pin                       |
| Encoding              | A-coded                      |

## Mechanical data

|                                                |                                                       |
|------------------------------------------------|-------------------------------------------------------|
| Dimension (W x H x L)                          | 20.5 mm x 76.3 mm x 44 mm                             |
| Housing material                               | Plastic                                               |
| Plastic housing                                | PC-PBT                                                |
| Lens cover material                            | Plastic / PMMA                                        |
| Net weight                                     | 60 g                                                  |
| Housing color                                  | Red                                                   |
| Type of fastening                              | Through-hole mounting<br>Via optional mounting device |
| Recommended tightening torque for M3 fastening | 0.9 N·m                                               |
| Recommended tightening torque for M4 fastening | 1.4 N·m                                               |
| Compatibility of materials                     | ECOLAB                                                |

## Operation and display

|                 |            |
|-----------------|------------|
| Type of display | LED        |
| Number of LEDs  | 3 Piece(s) |

## Environmental data

|                                |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -40 ... 60 °C |
| Ambient temperature, storage   | -40 ... 70 °C |

## Certifications


|                      |                 |
|----------------------|-----------------|
| Degree of protection | IP 67<br>IP 69K |
| Protection class     | III             |
| Standards applied    | IEC 60947-5-2   |

## Technical data

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| ECLASS 5.1.4          | 27270901 |
| ECLASS 8.0            | 27270901 |
| ECLASS 9.0            | 27270901 |
| ECLASS 10.0           | 27270901 |
| ECLASS 11.0           | 27270901 |
| ECLASS 12.0           | 27270901 |
| ECLASS 13.0           | 27270901 |
| ECLASS 14.0           | 27270901 |
| ECLASS 15.0           | 27270901 |
| ETIM 5.0              | EC002716 |
| ETIM 6.0              | EC002716 |
| ETIM 7.0              | EC002716 |
| ETIM 8.0              | EC002716 |
| ETIM 9.0              | EC002716 |
| ETIM 10.0             | EC002716 |

## Dimensioned drawings

All dimensions in millimeters

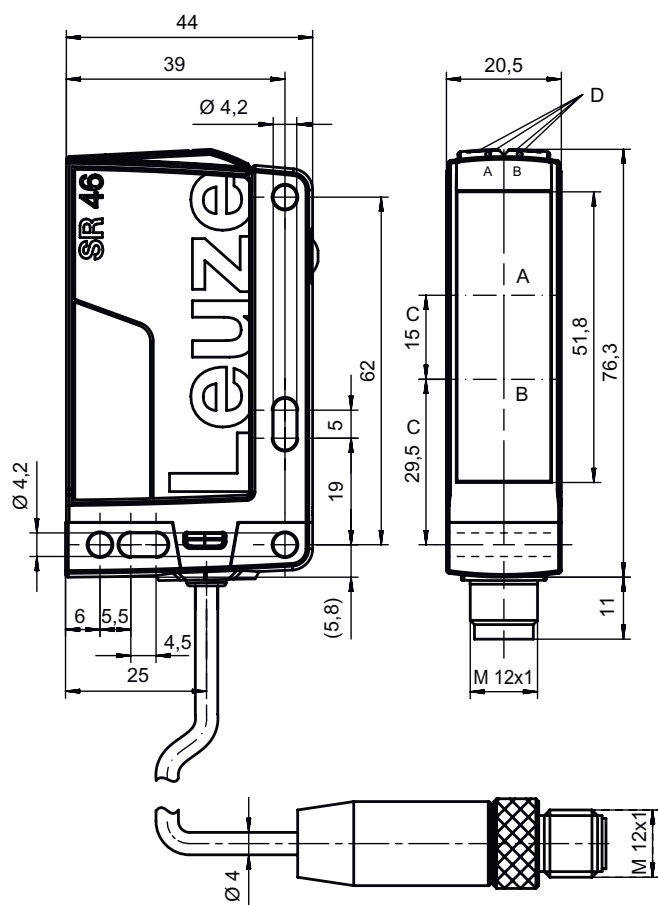


- A Receiver
- B Yellow LED
- C Optical axis
- DA Green LED
- DB Yellow LED
- E Sensitivity adjustment

Electrical connection



Connection 1

|                    |                |
|--------------------|----------------|
| Function           | Signal OUT     |
|                    | Voltage supply |
| Type of connection | Connector      |
| Thread size        | M12            |
| Type               | Male           |
| Material           | Plastic        |
| No. of pins        | 4 -pin         |
| Encoding           | A-coded        |

| Pin | Pin assignment |
|-----|----------------|
| 1   | V+             |
| 2   | OUT 2          |
| 3   | GND            |
| 4   | OUT 1          |



Diagrams

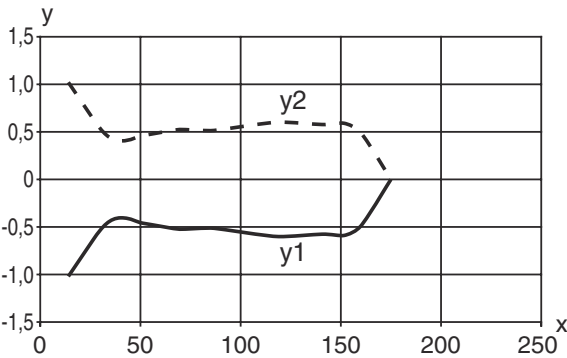

Operation and display

| LED | Display                                                        | Meaning                                   |
|-----|----------------------------------------------------------------|-------------------------------------------|
| 1   | Green, continuous light                                        | Operational readiness                     |
| 2   | Yellow, continuous light                                       | Light path free                           |
|     | Yellow, flashing                                               | No function reserve                       |
| 3   | Yellow, continuous light (alignment display behind lens cover) | Light path free                           |
|     | Yellow, flashing (alignment display behind lens cover)         | Light path free, minimum function reserve |

## Suitable transmitters

|                                                                                   | Part no. | Designation            | Operating range<br>Operating range<br>limit | Description                                                                                                                                                            |
|-----------------------------------------------------------------------------------|----------|------------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50136465 | SET LS46C-M12+BTU46.25 | 0 ... 120 m<br>0 ... 150 m                  | Pre-mounted with: Mounting system<br>Operating range limit: 0 ... 150 m<br>Light source: LED, Red<br>Supply voltage: DC<br>Connection: Connector, M12, Plastic, 4 -pin |

## Part number code

Part designation: **AAA46C d EE-f.GG H/i J-K**

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AAA46C</b> | <b>Operating principle / construction</b><br>HT46C: Diffuse reflection sensor with background suppression<br>LS46C: Throughbeam photoelectric sensor transmitter<br>LE46C: Throughbeam photoelectric sensor receiver<br>PRK46C: Retro-reflective photoelectric sensor with polarization filter<br>RK46C: Retro-reflective photoelectric sensor                                                                                                                                                                                                                                                                                                                                                |
| <b>d</b>      | <b>Light type</b><br>n/a: red light<br>I: infrared light                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>EE</b>     | <b>Light source</b><br>n/a: LED<br>L1: laser class 1<br>L2: laser class 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>f</b>      | <b>Preset range (optional)</b><br>n/a: operating range acc. to data sheet<br>xxxF: Preset range [mm]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>GG</b>     | <b>Equipment</b><br>n/a: standard<br>1: 270° potentiometer<br>8: activation input (activation with high signal)<br>01: diffuse reflection sensor with background suppression (HT): HG tape (HighGain tape) is not detected from a distance of 900 mm with a set operating range of ≤ 450 mm (diffuse reflection: 6%, black)<br>D: Depolarizing media<br>E: Diffuse reflection sensor with background suppression (HT): optimized for dusty environments<br>SL: Diffuse reflection sensor with background suppression (HT): slit diaphragm 25 mm x 3 mm<br>P: throughbeam photoelectric sensor receiver (LE): edge filter for parallel operation<br>L: Light-band<br>XL: Extra long light spot |
| <b>H</b>      | <b>Operating range adjustment &amp; version</b><br>n/a with diffuse reflection sensor with background suppression (HT): range adjustment via mechanical adjusting spindle<br>n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable<br>1: retro-reflective photoelectric sensors (PRK/RK): sensitivity adjustment via potentiometer<br>3: teach-in via button<br>P2: resolution 2 mm                                                                                                                                                                                                                                                                           |
| <b>i</b>      | <b>Switching output/function OUT 1/IN: Pin 4 or black conductor</b><br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>L: IO-Link<br>G: Push-pull switching output, PNP dark switching, NPN light switching<br>6: push-pull switching output, PNP light switching, NPN dark switching                                                                                                                                                                                                                                                                       |
| <b>J</b>      | <b>Switching output / function OUT 2/IN: pin 2 or white conductor</b><br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>8: activation input (activation with high signal)<br>9: deactivation input (deactivation with high signal)<br>W: warning output<br>X: pin not used<br>G: Push-pull switching output, PNP dark switching, NPN light switching<br>6: push-pull switching output, PNP light switching, NPN dark switching                                                                                                                             |

## Part number code

|   |                                                                                                                                                                                                                                                                                                                                              |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| K | <b>Electrical connection</b><br>n/a: cable, standard length 2000 mm, 4-wire<br>200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug)<br>M12: M12 connector, 4-pin (plug)<br>500-M12: cable, length 500 mm with M12 connector, 4-pin, axial (plug)<br>1000-M12: cable, length 1000 mm with M12 connector, 4-pin, axial (plug) |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Note



A list with all available device types can be found on the Leuze website at [www.leuze.com](http://www.leuze.com).

## Notes



### Observe intended use!



- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with its intended use.

### For UL applications:



- ⚠ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- ⚠ These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

### For UL applications:




- ⚠ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- ⚠ These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

## Further information

- Response time: For short decay times, an ohmic load of approx. 5kOhm is recommended

Connection technology - Connection cables

|                                                                                                                                                                        | Part no. | Designation        | Article          | Description                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br> | 50130652 | KD U-M12-4A-V1-050 | Connection cable | Application: Chemical resistant<br>Connection 1: Connector, M12, Axial, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC  |
| <br>  | 50130690 | KD U-M12-4W-V1-050 | Connection cable | Application: Chemical resistant<br>Connection 1: Connector, M12, Angled, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC |

Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.