

Fiche technique

Informations sur la gamme de codeurs rotatifs

Art. n°: 90000440

EI30-P 058 HO

Contenu

- Caractéristiques techniques
- Code d'article



Figure pouvant varier

Série d'encodeurs	EI 058 HO
Principe de base encodeur	incrémental
Principe de fonctionnement encodeur	optiquement interpolé
Diamètre de bride encodeur	Ø 58 mm
Type de bride encodeur	Arbre creux
Arbre plein/arbre creux encodeur	Arbre creux
Diamètre d'arbre encodeur	Ø 10 mm
	Ø 12 mm
	Ø 14 mm
	Ø 15 mm
	Ø 6 mm
	Ø 7 mm
	Ø 8 mm
Tension d'alimentation encodeur	10 ... 30 V DC
	4,75 ... 5,5 V CC
	5 ... 30 V CC
Commande de sortie encodeur	1 Vss Sin/Cos
	HTL
	HTL, inv.
	TTL
	TTL, RS422 compatible, inv.
Nombre d'impulsions encodeur	1000 I/U
	10000 I/U
	10240 I/U
	12500 I/U
	16384 I/U
	2000 I/U
	20000 I/U
	20480 I/U
	2500 I/U
	25000 I/U
	4000 I/U
	4096 I/U
	5000 I/U
	8000 I/U
	8192 I/U

Caractéristiques techniques

Encoder EI30 P 058 HO

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	hollow shaft (blind-bored)
Flange material	aluminum
Housing material	die cast aluminum, powder coated
Torque supports	incl. 1 torque support
- 1. Spring plate compensation	axial: ± 0.8 mm [0.0315"], radial: ± 0.2 mm [0.0079"]
- Max. operating speed	6000 rpm up to max. protection rating +60 °C
- 2. Cylinder pin 4 mm	needs accessories
- Compensation	axial: ± 0.5 mm [0.0197"], radial: ± 1.5 mm [0.0591"], Max. operating speed: 3000 rpm
Flange diameter	$\varnothing$ 58 mm [$\varnothing$ 2.283"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 2.2 Ncm [3.115 in-ozf] at ambient temperature
Fixing	permanently attached clamping ring

Shaft	$\varnothing$ 6 mm [$\varnothing$ 0.236"]
Advice	with adapter sleeve
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 6.35 mm [$\varnothing$ 1/4"] Order No: 2Z
Advice	with adapter sleeve
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 7 mm [$\varnothing$ 0.276"]
Advice	with adapter sleeve
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 8 mm [$\varnothing$ 0.315"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]

Max. Permissible shaft loading axial	60 N [6.118 kp]
--------------------------------------	-----------------

Shaft	$\varnothing$ 9.525 mm [$\varnothing$ 3/8"] Order No: 4Z
Advice	with adapter sleeve
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 10 mm [$\varnothing$ 0.394"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 12 mm [$\varnothing$ 0.472"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 12.7 mm [$\varnothing$ 1/2"] Order No: 3Z
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 14 mm [$\varnothing$ 0.551"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 15 mm [$\varnothing$ 0.591"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Bearings

Bearings type	2 precision ball bearings
Nominal service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	6000 rpm

Caractéristiques techniques

Encoder EI30 P 058 HO

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 6000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany


General Data

Weight	approx. 220 g [7.76 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	IP65 all around
Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C (Option LT: -40 °C up to +85 °C). Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F, Option LT: -40 °F up to +185 °F 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	Connector: -40 °C up to +85 °C, Cable: -30 °C up to +80 °C (Option LT: -40 °C up to +85 °C) Connector: -40 °F up to +185 °F, cable: -22 °F up to +176 °F, (Option LT: -40 °F up to +185 °F)

Caractéristiques techniques

Encoder EI30 P 058 HO

Cable connection R-N, R-C, radial, with 2 m cable

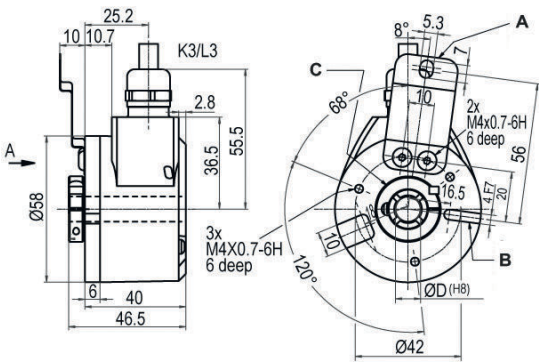

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring


All dimensions in mm

Description		N inv. poss.
R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments

	R-NR-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	-
	-	-	-
A inv.	-	RD	YE
B inv.	-	BK, (BU at LT)	PK
N inv.	-	VT	-
Shield	flex	flex	flex

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

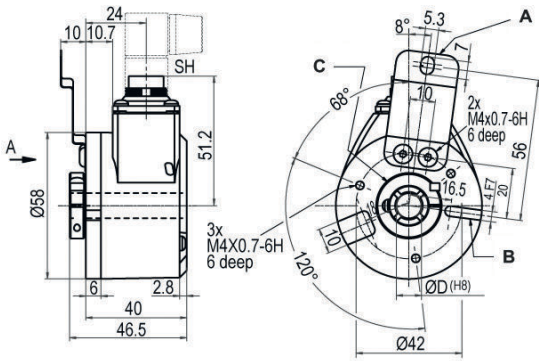

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

All dimensions in mm

Caractéristiques techniques





Encoder EI30 P 058 HO

Description


N inv. poss.

R5	radial, 5-pin, Connector connected to encoder housing	—
R6	radial, 6-pin, Connector connected to encoder housing	—
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	R5	R6	R8	R8	R12	R12
	5-pin	6-pin	8-pin	8-pin	12-pin	12-pin
						
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	—	C	—
—	—	—	—	—	—	—
A inv.	—	—	6	6	F	F
B inv.	—	—	7	7	A	A
N inv.	—	—	8	—	D	—
n. c.	—	5	—	5, 8	G, J	D, G, J
Shield	—	—	—	—	—	—

Connector (M16x0.75) R7, radial, 7-pin

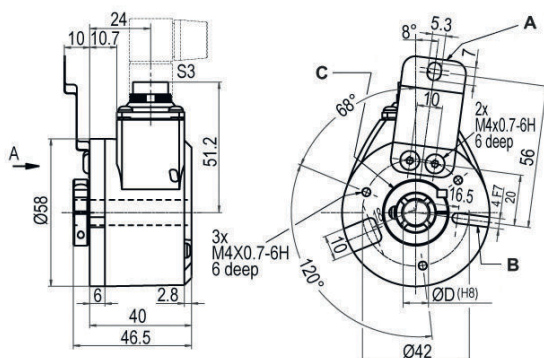

All dimensions in mm

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

Description

N inv. poss.

R7	radial, 7-pin, Connector connected to encoder housing	—
-----------	---	---


Caractéristiques techniques

Encoder EI30 P 058 HO

Assignments

R7	
7-pin	
	
Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
—	—
A inv.	—
B inv.	—
N inv.	—
n. c.	6, 7
Shield	—

Connector (M23) R12M, radial, 12-pin

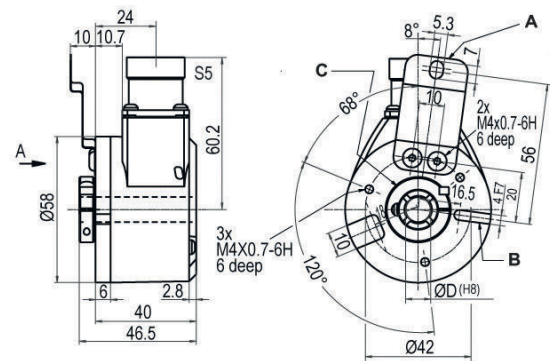

All dimensions in mm

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

Description

N inv. poss.

R12M radial, 12-pin, Connector connected to encoder housing

Assignments

	R12M	R12M	R12M
	12-pin	12-pin	12-pin
			
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12


Caractéristiques techniques

Encoder EI30 P 058 HO

Assignments

A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

Connector (M23) RC, radial, 12-pin (clockwise)

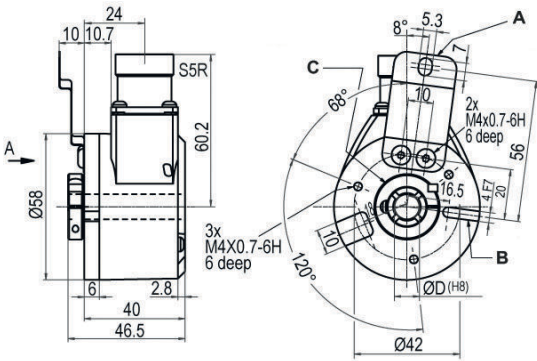

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

All dimensions in mm

Description

N inv. poss.

RC12 radial, 12-pin, Connector connected to encoder housing

Assignments

	RC12 12-pin	RC12 12-pin	RC12 12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—


Caractéristiques techniques

Encoder EI30 P 058 HO

Assignments

n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	-	-	-

Sensor-connector (M12x1) RS radial, 4-, 5-, 8-, 12-pin

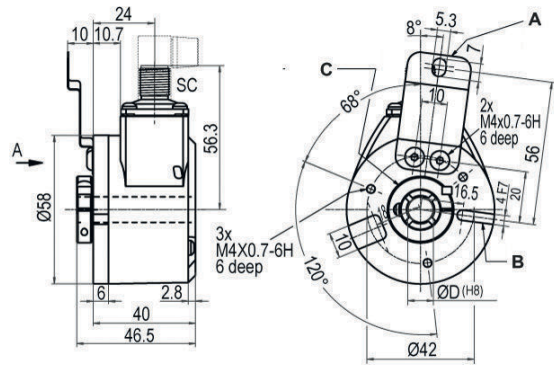

All dimensions in mm

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

Description

N inv. poss.

RS4	radial, 4-pin, Connector connected to encoder housing	-
RS5	radial, 5-pin, Connector connected to encoder housing	-
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS5 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS8 8-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	4	4	3	3	4
B	-	2	4	5	6
N	-	5	5	-	8
-	-	-	-	-	-
A inv.	-	-	6	4	9
B inv.	-	-	7	6	7
N inv.	-	-	8	-	10
n. c.	-	-	-	7, 8	2, 5, 11, 12
Shield	-	-	-	-	-

Caractéristiques techniques

Encoder EI30 P 058 HO

Options

Low temperature	Order key
The encoder EI30 P 058 HO with the output circuit types C1, C2, C3, C4, C5, C6, D3, D4, D5, D6 is also available with the extended temperature range -40 °C up to +85 °C [-40 °F up to +185 °F] (measured at the flange).	LT
Pressure equalising membrane	Order key
The EI30 P 058 HO shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity. The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1.	PE
Cable length	Order key
The encoder EI30 P 058 HO can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

Caractéristiques techniques

Encoder EI30 P 058 HO

Example Order No.	Type				
EI30 P 058 HO	EI30 P 058 HO	EI30 P 058 HO			
Bore size					
10	06; 2Z; 07; 08; 4Z; 10; 12; 3Z; 14; 15	10			
Pulses per revolution PPR:					
1024	4, 6, 25, 36, 50, 60, 64, 70, 88, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 360, 400, 500, 512, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000, 8000, 8192, 10000, 10240, 12500, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other pprs on request	1-16384			
Channels:					
N	B, N (SIN: B)	N			
Output circuit					
C6	Resolution PPR	Power supply VDC	Output circuit	-	Order key
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	-	C7
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	-	D7
	up to 5000	4.75 - 5.5	TTL	-	C5
		4.75 - 5.5	TTL, RS422 comp., inverted	-	D5
		10 - 30	HTL	-	C6
		10 - 30	HTL inverted	-	D6
		10 - 30	TTL, RS422 comp., inverted	-	C1
	(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	-	C3
		4.75 - 5.5	TTL, RS422 comp., inverted	-	D3
		10 - 30	HTL	-	C4
		10 - 30	HTL inverted	-	D4
		10 - 30	TTL, RS422 comp., inverted	-	C2
	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	-	D8

Caractéristiques techniques

Encoder EI30 P 058 HO

Electrical connections

Description		N inv. poss.	Order key
Cable: length (2 m standard)			
R-N	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, radial		RS4
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, radial		RS12

Options

Description	Order key
Low-friction bearings	LB
Low temperature	LT
Pressure equalising membrane	PE
Cable length	XXX = Decimeter
Without option	Empty

Example Order No.:	EI30 P 058 HO	10	1024	N	R-N	EI30 P 058 HO	Your encoder
--------------------	---------------	----	------	---	-----	---------------	--------------

Code d'article

Désignation d'article : **EABB CCCDDEE FFFFFFF GHJJKK LLMNOPPP RR**

A	Type de codeur rotatif I : Incrémental S : Absolu, mono-tour M : Absolu, multi-tour
BB	Série 10 : Entry 30 : Basic 50 : Extended 70 : Advanced
CCC	Diamètre de bride 024 : 24 mm 036 : 36 mm 058 : 58 mm 063 : 63 mm 067 : 67 mm 070 : 70 mm 080 : 80 mm 100 : 100 mm 115 : 115 mm
DD	Type de bride BB : Arbre creux avec alésage Sackloch CC : Bride de serrage (forme compacte) CF : Bride de serrage (aliments et boissons) CH : Bride de serrage (exécution pour charges lourdes) CL : Bride de serrage HI : Arbre creux (isolé) HO : Arbre creux HT : Arbre creux (supports de couple spéciaux) RC : Bride ronde (bride de serrage 36/40, 58 avec arbre de 6 mm) RE : Bride ronde (alésages étendus) RN : Bride ronde SC : Accouplement statorique SF : Bride à vis (bride de serrage 53, 58 Aliments et boissons) SI : Bride synchro (charge sur l'arbre étendue et protection IP) SQ : Bride carrée SR : Bride à vise (bride de serrage 36/40, 58 résistante à la corrosion) SY : Synchro (incrémental), Servo (36), Synchro (58) (absolu) TM : Tacho (115 avec arbre de 1 mm, rétroaction moteur 58) TS : Tacho (arbre de 10 mm)
EE	Diamètre arbre/alésage 06 : 6 mm 07 : 7 mm 08 : 8 mm 08 : 8 mm 10 : 10 mm 11 : 11 mm 12 : 12 mm 14 : 14 mm 15 : 15 mm 06-72 : Alésage creux/Sackloch (6 ... 72 mm)
FFFFFF	Signal/résolution Axxxxx : A Bxxxxx : AB Nxxxxx : ABN P16384 : programmable xx : Mono-tour, 1 ... 16 bit xx : Multi-tour, 0 ... 43 bit (00 pour mono-tour)
G	Isolation galvanique (absolu uniquement) 0 : sans 1 : avec
HH	Alimentation en tension (absolu uniquement) 0 : 10 ... 32 V CC/avec isolation galvanique 1 : 4,75 ... 5,5 V CC 2 : 18 ... 30 V CC
J	Principe de fonctionnement M : magnétique O : Optique P : optiquement interpolé

Code d'article

KK	Interface 01 : RS485 07 : SSI binaire 08 : SSI Gray 35 : CANopen 38 : EtherCAT 48 : PROFINET 58 : EtherNET/IP
LL	Raccordement électrique M08 : Connecteur rond M8 M12 : Connecteur rond M12 M16 : Connecteur rond M16 M23 : Connecteur rond M23 M12BC : Connecteur boîtier réseau
M	Sortie de câble A : Axial R : Radial T : Tangentiel
NN	Nombre de pôles xx : Nombre de pôles
O	Connexion blindage (câble 2 m) (en option) C : raccordé N : non raccordé
PPP	Longueur de câble xxx : Longueur de câble (en dm)

Remarque



Vous trouverez une liste de tous les types d'appareil disponibles sur le site Internet de Leuze à l'adresse www.leuze.com.

