

Scheda tecnica dati

Informazioni sulla serie di encoder

Cod. art.: 90000470

EI30-P 100 HI

Contenuto

- Dati tecnici
- Codice articoli



La figura può variare

Encoder_Serie	EI 100 HI
Encoder_Principio di base	incrementale
Encoder_Principio di funzionamento	interpolato otticamente
Encoder_Diametro della flangia	Ø 100 mm
Encoder_Tipo di flangia	Albero cavo isolato
Encoder_Albero pieno/Albero cavo	Albero cavo
Encoder_Dametro dell'albero	Ø 25 mm
	Ø 30 mm
	Ø 32 mm
	Ø 38 mm
	Ø 40 mm
	Ø 42 mm
Encoder_Tensione di alimentazione	10 ... 30 V CC
	4,75 ... 5,5 V CC
	5 ... 30 V DC
Encoder_Circuito di uscita	1 Vss Sin/Cos
	HTL
	HTL, inv.
	TTL
	TTL, compatibile con RS422, inv.
Encoder_Numero di impulsi	10240 I/U
	16384 I/U
	20480 I/U
	4096 I/U
	8192 I/U

Dati tecnici

Encoder EI30 P 100 HI

Resolution

Pulses per revolution PPR	up to 20480 PPR
---------------------------	-----------------

Mechanical Data

Flange	hollow shaft (through-bored)
Flange material	aluminum
Housing material	aluminum, powder coated
Torque supports	incl. 1 torque support
- 1. Spring plate compensation	axial: ± 0.8 mm [0.0315"], radial: ± 0.2 mm [0.0079"]
Flange diameter	$\varnothing$ 100 mm [$\varnothing$ 3.543"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1.5 Ncm [2.124 in-ozf] at ambient temperature
Fixing	2 x M4, DIN 913; Starting torque: 2,5 Nm

Shaft	$\varnothing$ 25 mm [$\varnothing$ 0.984"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 28 mm [$\varnothing$ 1.102"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 30 mm [$\varnothing$ 1.181"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 32 mm [$\varnothing$ 1.26"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 38 mm [$\varnothing$ 1.496"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 40 mm [$\varnothing$ 1.575"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 42 mm [$\varnothing$ 1.654"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 45 mm [$\varnothing$ 1.772"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Bearings

Bearings type	2 precision ball bearings
Nominale service life	3 x 10 ¹⁰ revs. at 100 % rated shaft load 1 x 10 ¹¹ revs. at 40 % rated shaft load 1 x 10 ¹² revs. at 20 % rated shaft load
Max. operating speed	3500 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹² revs. at 20 % rated shaft load and 3500 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4.75 VDC up to 30 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL $\leq$ 5000 ppr: max. 200 kHz HTL $\leq$ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz

Dati tecnici

Encoder EI30 P 100 HI

Electrical Data

Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C6 and D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160


Duty information

Customs tariff number:	90318020
Country of origin:	Germany

General Data

Weight	approx. 720 g [25.397 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	IP54
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-30 °C up to +80 °C [-22 °F up to 176 °F]

Cable connection R-N, R-C radial with 2 m cable

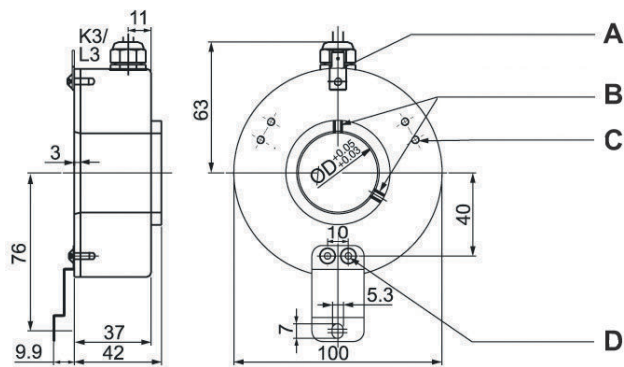

All dimensions in mm

- A Plug-in connexctor for functional ground connection
(flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

N inv. poss.

R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments

	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN


Dati tecnici

Encoder EI30 P 100 HI

Assignments

B	YE	YE	GY
N	GY	GY	BK
	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

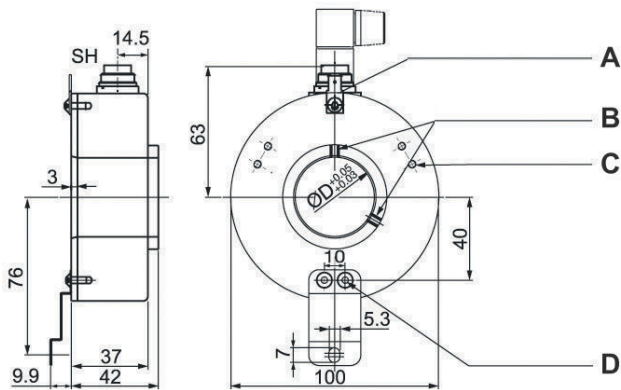

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

All dimensions in mm

Description

N inv. poss.

R5	radial, 5-pin, Connector connected to encoder housing	–
R6	radial, 6-pin, Connector connected to encoder housing	–
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	R5 5-pin	R6 6-pin	R8 8-pin	R8 8-pin	R12 12-pin	R12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	5	C	C
–	–	–	–	–	–	–
A inv.	–	–	6	6	F	F
B inv.	–	–	7	7	A	A


Dati tecnici

Encoder EI30 P 100 HI

Assignments

N inv.	-	-	8	8	D	D
n. c.	-	5	-	-	G, J	G, J
Shield	-	-	-	-	-	-

Connector (M16x0.75) R7, radial, 7-pin

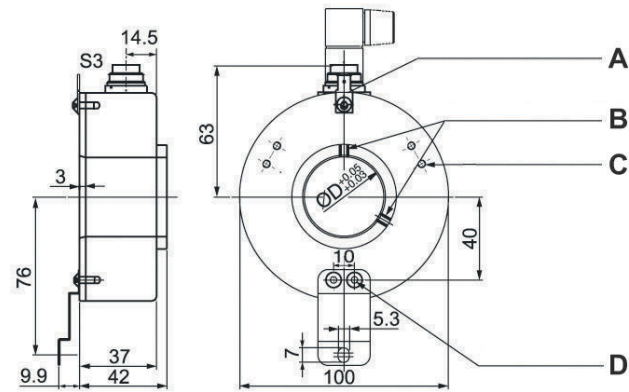

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

N inv. poss.

R7 radial, 7-pin, Connector connected to encoder housing

-

Assignments

R7
7-pin




Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
-	-
A inv.	-
B inv.	-
N inv.	-
n. c.	6, 7
Shield	-

Dati tecnici

Encoder EI30 P 100 HI

Connector (M23) R12M, radial, 12-pin

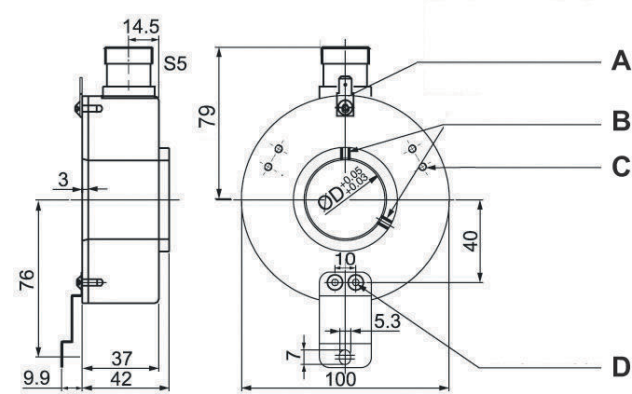

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description	N inv. poss.
R12M radial, 12-pin, Connector connected to encoder housing	•


Assignments

	R12M 12-pin	R12M 12-pin	R12M 12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	3
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
Shield	–	–	–

Dati tecnici

Encoder EI30 P 100 HI

Connector (M23) RC12, radial, 12-pin (clockwise)

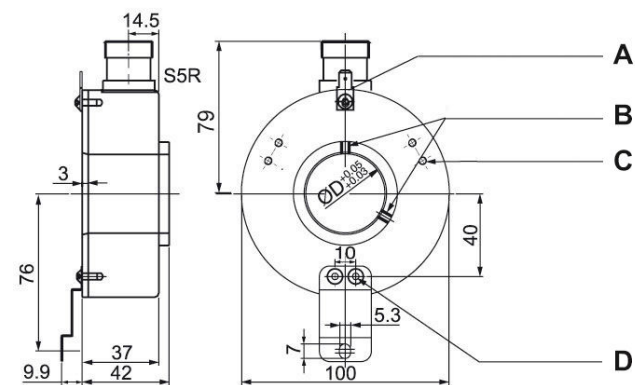

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description	N inv. poss.
RC12 radial, 12-pin, Connector connected to encoder housing	•

Assignments


	RC12 12-pin	RC12 12-pin	RC12 12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	3
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
Shield	—	—	—

Hier waren die falschen Bilder drin: es fehlte unten rechts das R

Dati tecnici

Encoder EI30 P 100 HI

Sensor-connector (M12x1) RS, radial, 4-, 5-, 8-, 12-pin

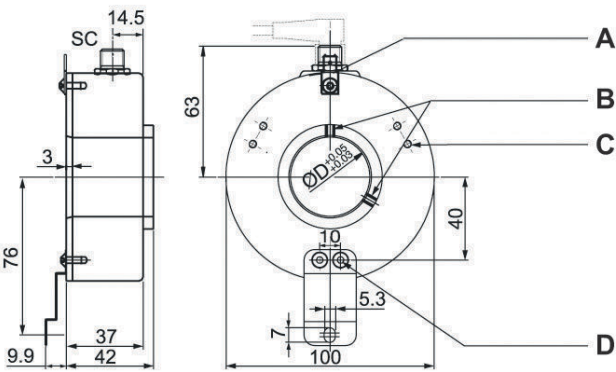

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description		N inv. poss.
RS4	radial, 4-pin, Connector connected to encoder housing	–
RS5	radial, 5-pin, Connector connected to encoder housing	–
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS4 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	–	5	5	–	8
–	–	–	–	–	–
A inv.	–	–	6	4	9
B inv.	–	–	7	6	7
N inv.	–	–	8	–	10
n. c.	–	–	–	7, 8	2, 5, 11, 12
Shield	–	–	–	–	–

Dati tecnici

Encoder EI30 P 100 HI

Options

Low temperature	Order key										
The encoder EI30 P 100 HI with the output circuit types C4, C6, D4, D6, C3, C5, D3, D5, C1, C2 is also available with the extended temperature range -40 °C up to +85 °C [-40 °F up to +185 °F] (measured at the flange).	LT										
Pressure equalising membrane	Order key										
The EI30 P 100 HI shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity. The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1. <table><tr><td>Max. RPM:</td><td>1500 rpm</td></tr><tr><td>Permitted Shaft-Loading, axial:</td><td>100 N [10.197 kp]</td></tr><tr><td>Permitted Shaft-Loading, radial:</td><td>120 N [12.236 kp]</td></tr><tr><td>Max. PPR:</td><td>20480 ppr</td></tr><tr><td>Starting-torque:</td><td>approx. 5 Ncm [7.081 in-ozf] at ambient temperature</td></tr></table>	Max. RPM:	1500 rpm	Permitted Shaft-Loading, axial:	100 N [10.197 kp]	Permitted Shaft-Loading, radial:	120 N [12.236 kp]	Max. PPR:	20480 ppr	Starting-torque:	approx. 5 Ncm [7.081 in-ozf] at ambient temperature	PE
Max. RPM:	1500 rpm										
Permitted Shaft-Loading, axial:	100 N [10.197 kp]										
Permitted Shaft-Loading, radial:	120 N [12.236 kp]										
Max. PPR:	20480 ppr										
Starting-torque:	approx. 5 Ncm [7.081 in-ozf] at ambient temperature										
Cable length	Order key										
The encoder EI30 P 100 HI can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter										

Dati tecnici

Encoder EI30 P 100 HI

Example Order No.	Type				
EI30 P 100 HI	EI30 P 100 HI				
EI30 P 100 HI					
Shaft					
25	25; 28; 30; 32; 38; 40; 42; 45				
Pulses per revolution PPR:					
1024	512, 1024, 2048, 2500, 3600, 4096, 4500, 5000, 8192, 10240, 16384, 20480 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request				
Channels:					
N	B, N				
Output circuit					
C6	Resolution PPR	Power supply VDC	Output circuit	–	Order key
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	–	C7
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	–	D7
	up to 5000	4.75 - 5.5	TTL	–	C5
		4.75 - 5.5	TTL, RS422 comp., inverted	–	D5
		10 - 30	HTL	–	C6
		10 - 30	HTL inverted	–	D6
	(higher frequency) 1200 up to 25000	10 - 30	TTL, RS422 comp., inverted	–	C1
		4.75 - 5.5	TTL	–	C3
		4.75 - 5.5	TTL, RS422 comp., inverted	–	D3
		10 - 30	HTL	–	C4
		10 - 30	HTL inverted	–	D4
		10 - 30	TTL, RS422 comp., inverted	–	C2
	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	–	D8

Dati tecnici

Encoder EI30 P 100 HI

Electrical connections

Description		N inv. poss.	Order key
Cable: length (2 m standard)			
R-N	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, radial	–	RS4
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, radial	•	RS12

Options

Description		Order key
Low temperature		LT
IP55		PE
Without option		Empty
Cable length		XXX = Decimeter

Example Order No.:	EI30 P 100 HI	25	1024	N	C6	R-N	EI30 P 100 HI	Your enco- der
-----------------------	---------------	----	------	---	----	-----	---------------	-------------------

Codice articoli

Denominazione articolo: EABB CCCDDEE FFFFFFF GHJJKK LLMNNOPPP RR

A	Tipo di econder rotativo I: Incrementale S: Assoluto, monogiro M: Assoluto, multigiro
BB	Serie 10: Entry 30: Basic 50: Extended 70: Advanced
CCC	Diametro della flangia 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	Tipo di flangia BB: Albero cavo con foro cieco CC: Flangia di serraggio (forma costruttiva compatta) CF: Flangia di serraggio (alimenti e bevande) CH: Flangia di serraggio (versione per carichi pesanti) CL: Flangia di serraggio HI: Albero cavo (isolato) HO: Albero cavo HT: Albero cavo (supporto di coppia speciale) RC: Flangia circolare (36/40 flangia di serraggio, 58 con albero da 6 mm) RE: Flangia circolare (fori ampliati) RN: Flangia circolare SC: Accoppiamento statore SF: Flangia a vite (53 flangia di serraggio, 58 alimenti e bevande) SI: Servoflangia (carico sull'albero maggiorato e protezione IP) AQ: Flangia quadrata SR: Flangia a vite (36/40 flangia di serraggio, 58 resistente alla corrosione) SY: Sincro (incrementale), Servo (36), Sincro (58) (assoluto) TM: Tachimetro (115 con albero da 1 mm, 58 feedback motore) TS: Tachimetro (albero da 10 mm)
EE	Diametro dell'albero/del foro 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: Foro cavo/foro cieco (6 ... 72 mm)
FFFFFF	Segnale/risoluzione Axxxx: A Bxxxx: AB Nxxxx: ABN P16384: Programmabile xx: Monogiro, 1 ... 16 Bit xx: Multigiro, 0 ... 43 Bit (00 con monogiro)
G	Separazione galvanica (solo valore assoluto) 0: senza 1: con
HH	Alimentazione di tensione (solo valore assoluto) 0: 10 ... 32 V DC/con separazione galvanica 1: 4,75 ... 5,5 V DC 2: 18 ... 30 V DC
J	Principio di funzionamento M: magnetico O: Ottico P: interpolato otticamente

Codice articoli

KK	Interfaccia 01: RS485 07: SSI binario 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	Collegamento elettrico M08: Connettore circolare M8 M12: Connettore circolare M12 M16: Connettore circolare M16 M23: Connettore circolare M23 M12BC: Connettore bus con calotta.
M	Uscita cavi A: Assiale R: Radiale T: Tangenziale
NN	Numero di poli xx: Numero di poli
O	Connettore schermato (cavo da 2 m) (opzionale) C: collegato N: non collegato
PPP	Lunghezza del cavo xxx: Lunghezza del cavo (in dm)

Avviso



È possibile trovare una lista con tutti i tipi di apparecchi disponibili sul sito di Leuze all'indirizzo www.leuze.com.

