

Technical data sheet Light curtain receiver Part no.: 50122917 CML720i-R05-2400.A/PB-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2024-06-21

1/8

Technical data

Leuze

Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Object measurement
pheaton	object measurement
Special version	
pecial version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
Optical data	
perating range	0.1 3.5 m
Operating range	Guaranteed operating range
Operating range limit	0.1 4.5 m
Operating range limit	Typical operating range
Aeasurement field length	2,400 mm
Number of beams	480 Piece(s)
Beam spacing	5 mm
leasurement data	
linimum object diameter	10 mm
Electrical data	
rotective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U _B	18 30 V, DC
Residual ripple	0 15 %, From U _B
Open-circuit current	0 435 mA, The specified values refer to the entire package consisting of trans mitter and receiver.
have deside a deside de la debit	
Inputs/outputs selectable	100 ~ 1
Output current, max.	100 mA
Input resistance Number of inputs/outputs selectable	6,000 Ω
· ·	Inputs/outputs selectable
Type	
Voltage type, outputs	
Switching voltage, outputs	Typ. U _B / 0 V
Voltage type, inputs	DC
Switching voltage, inputs	high: ≥6V Iow: ≤ 4 V
	10w. 54 V
Input/output 1	10W. 24 V
Input/output 1 Activation/disable delay	1 ms
Activation/disable delay	
Activation/disable delay Fime behavior Cycle time	1 ms 14.8 ms
	1 ms
Activation/disable delay Fime behavior Cycle time	1 ms 14.8 ms
Activation/disable delay Fime behavior Cycle time Response time per beam	1 ms 14.8 ms
Activation/disable delay Time behavior Cycle time Response time per beam Interface Type	1 ms 14.8 ms 30 μs
Activation/disable delay Fime behavior Cycle time Response time per beam Interface	1 ms 14.8 ms 30 μs

Service interface				
Туре		IO-Link		
	IO-Link			
	Function	Configuration via software		
		Service		
C	onnection			
Nu	umber of connections	2 Piece(s)		
ΡI	ug outlet	Axial		
	Connection 1 Function	Configuration interface		
	Function	Configuration interface Connection to transmitter		
		Signal IN		
		Signal OUT		
		Voltage supply		
	Type of connection	Connector		
	Thread size	M12		
	Туре	Male		
	Material	Metal		
	No. of pins	8 -pin		
	Encoding	A-coded		
	Connection 2			
	Function	BUS IN BUS OUT		
	Type of connection	Connector		
	Thread size	M12		
	Туре	Female		
	Material	Metal		
	No. of pins	5 -pin		
	Encoding	B-coded		
_	echanical data			
	esign	Cubic		
Dimension (W x H x L)		29 mm x 35.4 mm x 2,475 mm Metal		
Housing material Metal housing		Aluminum		
	ens cover material	Plastic		
	et weight	2,450 g		
	ousing color	Silver		
	pe of fastening	Groove mounting		
		Via optional mounting device		
~	portion and display			
0	peration and display			
Ту	pe of display	LED		
• -		OLED display		
	umber of LEDs	2 Piece(s)		
īy	pe of configuration	Software Teach-in		
0	perational controls			
J	perational controls	Membrane keyboard		
E	nvironmental data			
A	nbient temperature, operation	-30 60 °C		
Ambient temperature, storage		-40 70 °C		

Technical data

Certifications

Degree of protection	IP 65
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2


Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549

Leuze

Dimensioned drawings

All dimensions in millimeters

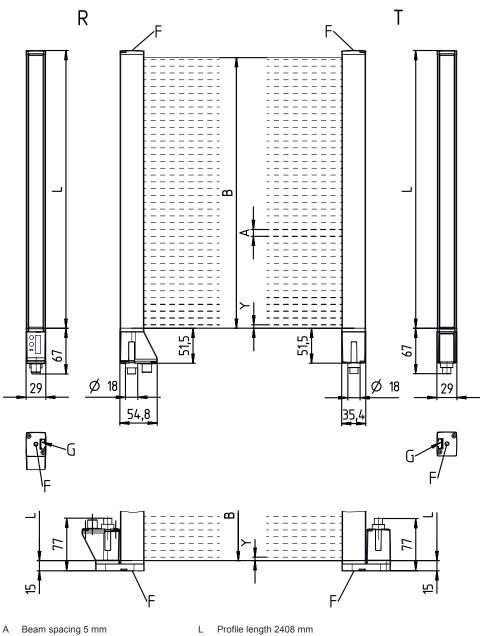


- Beam spacing 5 mm А
- В Measurement field length 2400 mm
- F M6 thread G Fastening groove
- Transmitter Т
- R Receiver
- 2.5 mm Υ

Leuze

Dimensioned drawings





A PWR / SW IN / OUT B BUS IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	RS 485 Tx+		
7	RS 485 Tx+		
8	FE/SHIELD		



Connection 2

Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	B-coded

Electrical connection

Pin	Pin assignment	2
1	V+	1
2	Tx-	
3	PB GND	
4	Tx+	
5	FE/SHIELD	

Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

 Part no.	Designation	Article	Description
50119397	CML720i-T05- 2400.A-M12	Light curtain transmitter	Operating range: 0.1 3.5 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series 720i: 720i series 730i: 730i series
Y	Device type T: transmitter R: receiver
22	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus



Part number code



DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
	Note
A	∜ A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes

Observe intended use!
this product is not a safety sensor and is not intended as personnel protection. the product may only be put into operation by competent persons. the product in accordance with its intended use.



For UL applications:

 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR

Leuze

Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Configuration devices

Accessories

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

Note

the A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.