Leuze

Technical data sheet Light curtain receiver Part no.: 50118753 CML730i-R05-1360.A/L-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2024-06-21

Technical data

Series	730
Operating principle	Throughbeam principle
	Receiver
Device type Contains	
	2x BT-NC sliding block
Application	Detection of transparent objects
	Object measurement
Special version	
Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
	0
Optical data	
Operating range	0.1 4.5 m
Operating range	Guaranteed operating range
Operating range, transparent media	0.1 1.75 m
Operating range limit	0.1 6 m
Operating range limit	Typical operating range
Measurement field length	1,360 mm
Number of beams	272 Piece(s)
Beam spacing	5 mm
Measurement data	
Minimum object diameter	10 mm
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U _B	18 30 V, DC
Residual ripple	0 15 %, From U _R
Open-circuit current	0 270 mA, The specified values refer
	to the entire package consisting of trans mitter and receiver.
Inputs/outputs selectable	
Output current, max.	100 mA
Input resistance	6,000 Ω
Number of inputs/outputs selectable	
Туре	Inputs/outputs selectable
Voltage type, outputs	DC
Switching voltage, outputs	Typ. U _B / 0 V
Voltage type, inputs	DC
Switching voltage, inputs	high: ≥6V
0 · · · 0 · / /····	low: $\leq 4 \text{ V}$
Input/output 1	
Activation/disable delay	0 1 ms
Time behavior	
Readiness delay	450 ms
Cycle time	2.87 ms
•	
Response time per beam	10 µs
Interface	
Туре	IO-Link

COM mode	COM2
Min. cycle time	COM2 = 2.3 ms
Specification	V1.0.1
	V1.1
ervice interface	
ре	IO-Link
IO-Link	
Function	Configuration via software
	Service
onnection	
umber of connections	2 Piece(s)
ug outlet	Axial
Connection 4	
Connection 1 Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
Connection 2	
Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Type	Female
Material	Metal
No. of pins Encoding	5 -pin A-coded
echanical data	0.11
esign mension (W x H x L)	Cubic 29 mm x 35.4 mm x 1,435 mm
Dusing material	Metal
etal housing	Aluminum
ens cover material	Plastic
et weight	1,500 g
ousing color	Silver
pe of fastening	Groove mounting
	Via optional mounting device
peration and display	
pe of display	LED
hh h	OLED display
umber of LEDs	2 Piece(s)
pe of configuration	Software
	Teach-in
perational controls	Membrane keyboard
oerational controls	Membrane keyboard
	Membrane keyboard -30 60 °C

Technical data

Certifications

Degree of protection	IP 65
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2


Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549



Dimensioned drawings

All dimensions in millimeters

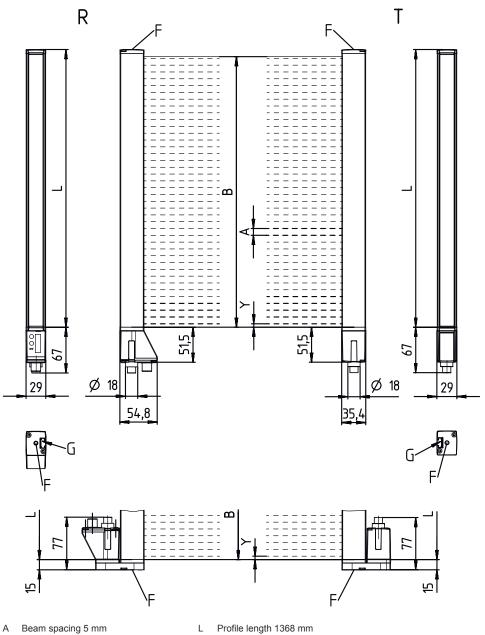


- Beam spacing 5 mm А
- В Measurement field length 1360 mm
- F M6 thread G Fastening groove
- Т R Receiver
 - 2.5 mm Υ

Transmitter

Dimensioned drawings



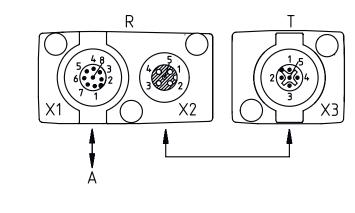

A PWR / SW IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
-	

Pin Pin assignment

1	V+
2	IO1
3	GND
4	IO-Link
5	102
6	103
7	104
8	GND



Connection 2

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



Operation and display

• • • • •				
LED	Display	Meaning		
1	Green, continuous light	Operational readiness		
	Green, flashing	Teach / error		
2	Yellow, continuous light	Light path free, with function reserve		
	Yellow, flashing	No function reserve		
	Off	Object detected		

Suitable transmitters

 Part no.	Designation	Article	Description
50118592	CML730i-T05- 1360.A-M12	Light curtain transmitter	Operating range: 0.1 4 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain			
7XXi	Series 720i: 720i series 730i: 730i series			
Y	Device type T: transmitter R: receiver			
ZZ	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm			
AAAA	Measurement field length [mm], dependent on beam spacing			
В	Equipment A: Axial connector outlet R: Rear connector outlet			
CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus			
DDD	Special equipment -PS: Power Setting			
EEE	Electrical connection M12: M12 connector			
FFF	-EX: Explosion protection			
Note	Note			
A list with all available device types can be found on the Leuze website at www.leuze.com.				

6/8

Notes

Observe intended use!

This product is not a safety sensor and is not intended as personnel protection.

b The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ Only use the product in accordance with its intended use.

	For
1	∜ F ∜ T C

U	L appl	ications:	
---	--------	-----------	--

b For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).

These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection unit

	Part no.	Designation	Article	Description
C. LEWIS	50144900	MD 798i-11-82/L5- 2222	IO-Link master	Type: IO-Link master Current consumption, max.: 11,000 mA Switching outputs for each sensor connection: 1 Piece(s) Switching output: Transistor, PNP Interface: IO-Link, Automatic protocol detection, EtherNet IP, Modbus TCP, PROFINET Connections: 12 Piece(s) Sensor connections: 8 Piece(s) Connections for voltage supply: 2 Piece(s) Interface connections: 2 Piece(s) Degree of protection: IP 67, IP 65, IP 69K

Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end
U				Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Leuze

Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Configuration devices

Accessories

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

Note

✤ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.