

Technical data sheet Light curtain receiver Part no.: 50120175 CML720i-R10-2560.R/CV-M12



Leuze electronic GmbH + Co. KG

info@leuze.com • www.leuze.com changes
 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

We reserve the right to make technical

Technical data

Basic data

Basic data		
Series	720	
Operating principle	Throughbeam principle	
Device type	Receiver	
Contains	Accessories for the use of the BT-2R1	
Application	Object measurement	
Special version		
Special version	Crossed-beam scanning	
	Diagonal-beam scanning	
	Parallel-beam scanning	
Optical data		
Operating range	0.3 7 m	
Operating range	Guaranteed operating range	
	0.2 9 m	
Operating range limit		
Operating range limit	Typical operating range	
Measurement field length	2,560 mm	
Number of beams	256 Piece(s)	
Beam spacing	10 mm	
Measurement data		
Minimum object diameter	20 mm	
Electrical data		
Protective circuit	Polarity reversal protection	
	Short circuit protected	
	Transient protection	
Deufermenne dete		
Performance data	19 20 1/ 00	
Supply voltage U _B	18 30 V, DC	
Residual ripple	0 15 %, From U _B	
Open-circuit current	0 435 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.	
Outrasta		
Outputs Number of analog outputs	2 Piece(s)	
Number of analog outputs	211000(3)	
Analog outputs		
Туре	Analog output	
Current	0 24 mA	
Voltage	0 11 V	
Analog output 1	N / W	
Туре	Voltage	
Analog output 2		
Analog output 2 Type	Current	
1360	ouront	
Inputs/outputs selectable		
Output current, max.	100 mA	
Input resistance	6,000 Ω	
Number of inputs/outputs selectable		
	Inputs/outputs selectable	
Voltage type, outputs	DC	
Switching voltage, outputs	Typ. U _B / 0 V	
Voltage type, inputs	DC	
Switching voltage, inputs	bc high: ≥6V	
Contening Voltage, inputs	low: ≤ 4 V	
	10W T V	

ns ms ms ms ms nk guration via software ce ce(s) side guration interface al IN al OUT
ms i nk guration via software ce ce(s) side guration interface al IN
nk guration via software ce ce(s) side guration interface al IN
nk guration via software ce ce(s) side guration interface al IN
guration via software ce ce(s) side guration interface al IN
guration via software ce ce(s) side guration interface al IN
ce ce(s) side guration interface al IN
ce ce(s) side guration interface al IN
ce ce(s) side guration interface al IN
guration interface
guration interface
guration interface al IN
al IN
al IN
al IN
ge supply
ector
0000
led
ection to transmitter
ector
lle
led
;
m x 35.4 mm x 2,583 mm
inum
c
g
ve mounting ptional mounting device
pasha mounting dovide
action mounting device
) display
) display ce(s)
) display

Leuze

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the right to make technical changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

Technical data

Leuze

Environmental data


Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C
Certifications	

Degree of protection	IP 65
Protection class	III
Approvals	c UL US
Standards applied	IEC 60947-5-2

Classification	
Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ECLASS 15.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549

Dimensioned drawings

All dimensions in millimeters

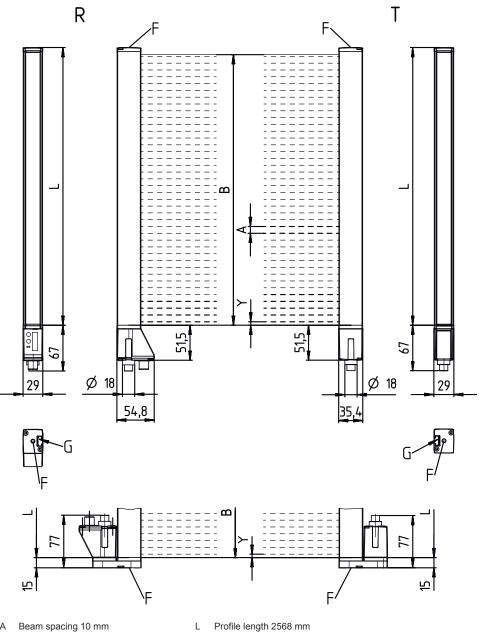

Beam spacing 10 mm А

Fastening groove

- В Measurement field length 2560 mm
- F M6 thread

G

R Receiver

Т

5 mm Υ


Transmitter

4/8

Leuze

Dimensioned drawings





A PWR / SW IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+
2	I/O 1
3	GND
4	IO-Link
5	I/O 2
6	OUT V
7	OUT mA
8	AGND



Connection 2

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



Operation and display

Light curtain receiver • Part no.: 50120175 • CML720i-R10-2560.R/CV-M12		Leuze
LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

 Part no.	Designation	Article	Description
50119502	CML720i-T10- 2560.R-M12	Light curtain transmitter	Operating range: 0.3 7 m Connection: Connector, M12, Rear side, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series 720i: 720i series 730i: 730i series
Y	Device type T: transmitter R: receiver
ZZ	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note	
A list wi	th all available device types can be found on the Leuze website at www.leuze.com.

Notes

Observe intended use!

✤ This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ The product may only be put into operation by competent persons.

	For UL applications:
A	 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code). These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
Ŭ	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

7/8

Leuze

Accessories

Leuze

Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
ęę.	429029	BT-2RG	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

Configuration devices

	Part no.	Designation	Article	Description
16	50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
6	ଓ A li

🗞 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.