Leuze

Technical data sheet Stationary bar code reader Part no.: 50116206 BCL 300i SF 102 D H



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-03

Technical data

Leuze

Basic data Series BCL 300i **Special version** Special version Heating **Functions** Functions Alignment mode AutoConfig AutoControl AutoReflAct Code fragment technology Heating LED indicator Reference code comparison **Characteristic parameters** MTTF 110 years **Read data** Code types, readable 2/5 Interleaved Codabar Code 128 Code 39 Code 93 EAN 8/13 GS1 Databar Expanded GS1 Databar Limited GS1 Databar Omnidirectional UPC 1,000 scans/s Scanning rate, typical Bar codes per reading gate, max. 64 Piece(s) number **Optical data** Reading distance 100 ... 470 mm Laser, Red Light source Wavelength 655 nm Laser class 1, IEC/EN 60825-1:2014 Transmitted-signal shape Continuous Usable opening angle (reading field 60 ° opening) Modulus size 0.3 ... 0.5 mm Reading method Line scanner Beam deflection Via rotating polygon wheel

Electrical data

Light beam exit

Protective circuit

Polarity reversal protection

Front

Performance data Supply voltage $\rm U_B$ Power consumption, max.

18 ... 30 V, DC 27 W

Inputs/outputs selectable 60 mA Output current, max. Number of inputs/outputs selectable 2 Piece(s) Input current, max. 8 mA

| Туре | RS 232, RS 422 |
|--|---|
| .)[- | |
| RS 232 | |
| Function | Process |
| Transmission speed | 4,800 115,200 Bd |
| Data format | Adjustable |
| Start bit | 1 |
| Data bit | 7,8 |
| Stop bit | 1.2 |
| Parity | Adjustable |
| Transmission protocol | <stx><data><cr><lf></lf></cr></data></stx> |
| Data encoding | ASCII |
| RS 422 | |
| Function | Process |
| Transmission speed | 4,800 115,200 Bd |
| Data format | Adjustable |
| Start bit | 1 |
| Data bit | 7, 8 data bits |
| Stop bit | 1, 2 stop bits |
| Transmission protocol | Adjustable |
| Data encoding | ASCII |
| | |
| Service interface | |
| Туре | USB 2.0 |
| | |
| USB | |
| Function | Configuration via software |
| Connection | |
| | |
| N | |
| Number of connections | 1 Piece(s) |
| | 1 Piece(s) |
| Number of connections Connection 1 Function | 1 Piece(s) BUS OUT |
| Connection 1 | BUSOUT |
| Connection 1 | |
| Connection 1 | BUS OUT Connection to device |
| Connection 1 | BUS OUT Connection to device Data interface PWR / SW IN / OUT |
| Connection 1 Function | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface |
| Connection 1 | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the |
| Connection 1 Function Type of connection | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. |
| Connection 1 Function Type of connection No. of pins | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin |
| Connection 1 Function Type of connection | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. |
| Connection 1 Function Type of connection No. of pins | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin |
| Connection 1 Function Type of connection No. of pins Type Mechanical data | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male |
| Connection 1 Function Type of connection No. of pins Type Mechanical data Design | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic |
| Connection 1 Function Type of connection No. of pins Type Mechanical data Design Dimension (W x H x L) | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm |
| Connection 1 Function Type of connection No. of pins Type Mechanical data Design Dimension (W x H x L) Housing material | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm Metal |
| Connection 1 Function Type of connection No. of pins Type Mechanical data Design Dimension (W x H x L) Housing material Metal housing | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm Metal Diecast aluminum |
| Connection 1 Function Type of connection No. of pins Type Wechanical data Design Dimension (W x H x L) Housing material Metal housing Lens cover material | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm Metal Diecast aluminum Glass |
| Connection 1 Function Type of connection No. of pins Type Mechanical data Design Dimension (W x H x L) Housing material Metal housing Lens cover material Net weight | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm Metal Diecast aluminum Glass 290 g |
| Connection 1 Function Type of connection No. of pins Type Wechanical data Design Dimension (W x H x L) Housing material Metal housing Lens cover material | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm Metal Diecast aluminum Glass 290 g Red |
| Connection 1 Function Function Type of connection No. of pins Type Mechanical data Design Dimension (W x H x L) Housing material Metal housing Lens cover material Net weight Housing color | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm Metal Diecast aluminum Glass 290 g Red Silver |
| Connection 1 Function Type of connection No. of pins Type Mechanical data Design Dimension (W x H x L) Housing material Metal housing Lens cover material Net weight | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm Metal Diecast aluminum Glass 290 g Red Silver Dovetail grooves |
| Connection 1 Function Function Type of connection No. of pins Type Mechanical data Design Dimension (W x H x L) Housing material Metal housing Lens cover material Net weight Housing color | BUS OUT Connection to device Data interface PWR / SW IN / OUT Service interface Plug connector, It is essential to use a connection unit when commissioning the device. 32 -pin Male Cubic 95 mm x 44 mm x 68 mm Metal Diecast aluminum Glass 290 g Red Silver |

Technical data

Leuze


Operation and display


| Type of display | LED | |
|---|--|--|
| | Monochromatic graphic display, 128 x 32 pixels | |
| Number of LEDs | 2 Piece(s) | |
| Type of configuration | Via web browser | |
| Environmental data | | |
| Ambient temperature, operation | -35 40 °C | |
| Ambient temperature, storage | -20 70 °C | |
| Relative humidity (non-condensing) | 0 90 % | |
| Certifications | | |
| Degree of protection | IP 65 | |
| Protection class | III | |
| Approvals | c UL US | |
| Test procedure for EMC in accordance | EN 55022 | |
| with standard | EN 61000-4-2, -3, -4, -6 | |
| Test procedure for shock in accordance with standard | IEC 60068-2-27, test Ea | |
| Test procedure for continuous shock | IEC 60068-2-29, test Eb | |
| in accordance with standard | | |

| Classification | |
|-----------------------|----------|
| Customs tariff number | 84719000 |
| ECLASS 5.1.4 | 27280102 |
| ECLASS 8.0 | 27280102 |
| ECLASS 9.0 | 27280102 |
| ECLASS 10.0 | 27280102 |
| ECLASS 11.0 | 27280102 |
| ECLASS 12.0 | 27280102 |
| ECLASS 13.0 | 27280102 |
| ECLASS 14.0 | 27280102 |
| ECLASS 15.0 | 27280102 |
| ETIM 5.0 | EC002550 |
| ETIM 6.0 | EC002550 |
| ETIM 7.0 | EC002550 |
| ETIM 8.0 | EC002550 |
| ETIM 9.0 | EC002550 |
| ETIM 10.0 | EC002550 |
| | |

Dimensioned drawings

All dimensions in millimeters

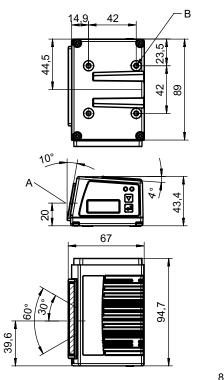



А Optical axis

В M4 thread (5 mm deep)

Electrical connection


Leuze

Connection 1

| Function | BUS OUT |
|--------------------|--|
| | Connection to device |
| | Data interface |
| | PWR / SW IN / OUT |
| | Service interface |
| Type of connection | Plug connector |
| Type of connection | It is essential to use a connection unit when commissioning the device. |
| No. of pins | 32 -pin |
| Туре | Male |

Diagrams

Reading field curve

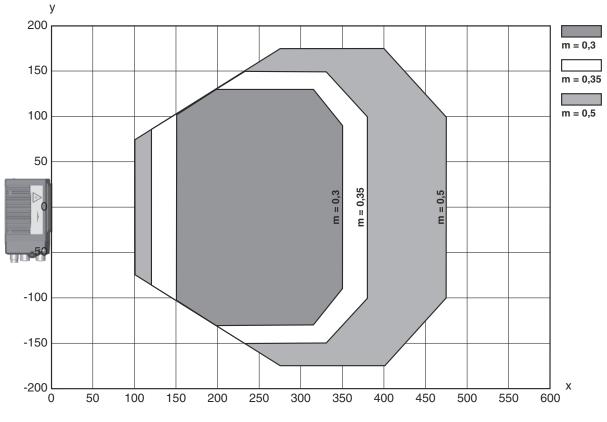

x Reading field distance [mm]

y Reading field width [mm]

Operation and display

| LED | Display | Meaning |
|-------|---------------------------------------|---------------------------------|
| 1 PWR | Green, flashing | Device ok, initialization phase |
| | Green, continuous light | Device OK |
| | Green, briefly off - on | Reading successful |
| | Green, briefly off - briefly red - on | Reading not successful |
| | Orange, continuous light | Service mode |
| | Red, flashing | Device OK, warning set |

Operation and display

Leuze

| LE | D | Display | Meaning |
|----|-----|-------------------------|---------------------|
| 1 | PWR | Red, continuous light | Error, device error |
| 2 | BUS | Green, flashing | Initialization |
| | | Green, continuous light | Bus operation ok |
| | | Red, flashing | Communication error |
| | | Red, continuous light | Bus error |

Part number code

Part designation: BCL XXXX YYZ AAA BB CCCC

| BCL | Operating principle BCL: bar code reader | | | |
|------|--|--|--|--|
| XXXX | Series/interface (integrated fieldbus technology) 300i: RS 232 / RS 422 (stand-alone) 301i: RS 485 (multiNet slave) 304i: PROFIBUS DP 308i: EtherNet TCP/IP, UDP 338i: EtherCAT 348i: PROFINET RT 358i: EtherNet/IP | | | |
| ΥY | Scanning principle S: line scanner (single line) R1: line scanner (raster) O: oscillating-mirror scanner (oscillating mirror) | | | |
| Z | Optics N: High Density (close) M: Medium Density (medium distance) F: Low Density (remote) L: Long Range (very large distances) J: ink-jet (depending on the application) | | | |
| AAA | Beam exit 100: lateral 102: front | | | |
| ВВ | Special equipment D: With display H: with heating DH: optionally with display and heating P: plastic exit window | | | |
| CCCC | Functions F007: optimized process data structure F099: OPC-UA function | | | |
| | Note | | | |
| | A list with all available device types can be found on the Leuze website at www.leuze.com. | | | |

Notes

| Observe intended use! |
|---|
| This product is not a safety sensor and is not intended as personnel protection. The product may only be put into operation by competent persons. Only use the product in accordance with its intended use. |

Notes

| | ATTENTION! LASER RADIATION - CLASS 1 LASER PRODUCT |
|----------|--|
| | The device satisfies the requirements of IEC/EN 60825-1:2014 safety regulations for a product of laser class 1 and complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019. |
| | ♥ Observe the applicable statutory and local laser protection regulations. |
| <u> </u> | The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG. |

Accessories

Connection technology - Connection unit

| Part no. | Designation | Article | Description |
|--------------|-------------|----------------------------|--|
| 50114369 | MA 100 | Modular connection unit | Supply voltage: 18 30 V Interface: RS 232, RS 485 Connections: 1 Piece(s) Degree of protection: IP 54 |

Connection technology - Connection cables

| Part no. | Designation | Article | Description |
|--------------|------------------------|------------------|---|
| 50132079 | KD U-M12-5A-V1- 050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC |

Connection technology - Interconnection cables

| | | Part no. | Designation | Article | Description |
|---|---|------------|-------------------------|-----------------------|--|
| 5 | 2 | 50114571 * | KB 301-3000 | Interconnection cable | Suitable for interface: RS 232, RS 422, RS 485 Connection 1: Socket connector Connection 2: JST ZHR connector, 10 -pin, 6 -pin Shielded: Yes Cable length: 3,000 mm Sheathing material: PVC |
| | | 50117011 | KB USB A - USB miniB | Service line | Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,500 mm Sheathing material: PVC |

* Necessary accessories, please order separately

Leuze

Accessories

Leuze

Connection technology - Connection boxes

| | Part no. | Designation | Article | Description |
|----|------------|-------------|-----------------|---|
| | 50116463 * | MK 300 | Connection unit | Suitable for: BCL 300i, BPS 300i Interface: RS 232 Number of connections: 3 Piece(s) Connection: Terminal |
| SS | 50116468 * | MS 300 | Connection unit | Suitable for: BCL 300i, BPS 300i Interface: RS 232 Number of connections: 3 Piece(s) Connection: Connector, M12 |
| | 50150597 * | MS 342 | Connector hood | Suitable for: BCL 348i Supply voltage: DC Interface: IO-Link Number of connections: 1 Piece(s) Connection: Connector, M12 |

* Necessary accessories, please order separately

Mounting technology - Mounting brackets

| Part no. | Designation | Article | Description |
|--------------|-------------|-----------------|---|
| 50121433 | BT 300 W | Mounting device | Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Adjustable Material: Metal |

Mounting technology - Rod mounts

| | Part no. | Designation | Article | Description |
|----------|----------|-------------|-----------------|---|
| S | 50121435 | BT 56 - 1 | Mounting device | Functions: Static applications Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, For 14 mm rod, For 16 mm rod Mounting bracket, at device: Clampable Material: Metal Tightening torque of the clamping jaws: 8 N⋅m |

Mounting technology - Other

| Part no. | Designation | Article | Description |
|--------------|-------------|-----------------|--|
| 50124941 | BTU 0300M-W | Mounting device | Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable, Groove mounting, Suited for M4 screws Material: Metal Shock absorber: No |

Accessories

Leuze

Reflective tapes for standard applications

| Part no. | Designation | Article | Description |
|--------------|-----------------|-----------------|---|
| 50106119 | REF 4-A-100x100 | Reflective tape | Design: Rectangular Reflective surface: 100 mm x 100 mm Material: Plastic Chemical designation of the material: PMMA Fastening: Self-adhesive |

Services

| | Part no. | Designation | Article | Description |
|--------|----------|-------------|------------------|---|
| ₽ © | S981020 | CS30-E-212 | Hourly rate | Details: Compilation of the application data, selection and suggestion of suitable sensor system, drawing prepared as assembly sketch. Conditions: Completed questionnaire or project specifications with a description of the application have been provided. |
| | S981014 | CS30-S-110 | Start-up support | Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. |
| | S981019 | CS30-T-110 | Product training | Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. |
| | S981021 | CS30-V-212 | Hourly rate | Details: REA evaluation with creation of a test report, evaluation of the code quality. Conditions: Original bar codes to be provided by the client. |

