


Technical data sheet Light curtain receiver Part no.: 50119870 CML720i-R40-610.A/CV-M12

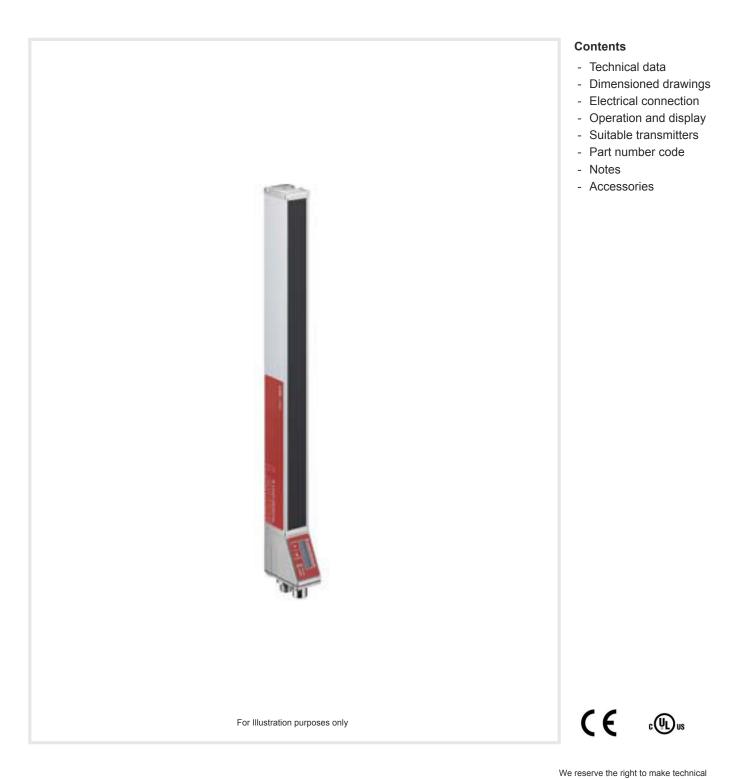

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com changes
 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

1/8

Technical data

Basic data

Basic data	
Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Object measurement
Special version	
Special version	Crossed-beam scanning
	Diagonal-beam scanning
	Parallel-beam scanning
Optical data	·
•	0.3 7 m
Operating range	Guaranteed operating range
Operating range	0.2 9 m
Operating range limit	
Operating range limit	Typical operating range 610 mm
Measurement field length Number of beams	
	15 Piece(s)
Beam spacing	40 mm
Measurement data	
Minimum object diameter	50 mm
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected
	Transient protection
Performance data	
Supply voltage U _B	18 30 V, DC
Residual ripple	0 15 %, From U _B
Open-circuit current	0 165 mA, The specified values refer to the entire package consisting of trans- mitter and receiver.
Outputs	
Number of analog outputs	2 Piece(s)
Analog outputs	
Туре	Analog output
Current	0 24 mA
Voltage	0 11 V
Analog output 1	
Туре	Voltage
Analog output 2	
Туре	Current
Inputs/outputs selectable	
Output current, max.	100 mA
Input resistance	6,000 Ω
Number of inputs/outputs selectable	2 Piece(s)
Туре	Inputs/outputs selectable
Voltage type, outputs	DC
Switching voltage, outputs	Typ. U _B / 0 V
Voltage type, inputs	DC
Switching voltage, inputs	high: ≥6V
	$low: \le 4 V$

	Input/output 1	
	Activation/disable delay	1 ms
Tii	me behavior	
Re	adiness delay	450 ms
Су	cle time	1 ms
Re	esponse time per beam	30 µs
Se	ervice interface	
Ту	ре	IO-Link
	IO-Link	
	Function	Configuration via software
		Service
Сс	onnection	
Nu	Imber of connections	2 Piece(s)
Plu	ug outlet	Axial
	Connection 1	
	Function	Configuration interface
		Signal IN
		Signal OUT
	Type of connection	Voltage supply Connector
	Type of connection Thread size	M12
	Type	Male
	Material	Metal
	No. of pins	8 -pin
	Encoding	A-coded
	Encouning	A-coded
	Connection 2	
	Function	Connection to transmitter
	Type of connection	Connector
	Thread size	M12
	Туре	Female
	Material	Metal
	No. of pins	5 -pin
	Encoding	A-coded
Me	echanical data	
De	esign	Cubic
	mension (W x H x L)	29 mm x 35.4 mm x 715 mm
	ousing material	Metal
	etal housing	Aluminum
	ns cover material	Plastic
Ne	et weight	850 g
	ousing color	Silver
Ту	pe of fastening	Groove mounting
		Via optional mounting device
O	peration and display	
Ту	pe of display	LED
		OLED display
	Imber of LEDs	2 Piece(s)
Nu		
	pe of configuration	Software
	pe of configuration	Software Teach-in

Leuze

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the right to make technical changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

Technical data

Leuze

Environmental data


Ambient temperature, operation	-30 60 °C
Ambient temperature, storage	-40 70 °C
Certifications	

Degree of protection	IP 65
Protection class	III
Approvals	c UL US
Standards applied	IEC 60947-5-2

Classification	
Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ECLASS 15.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549

Dimensioned drawings

All dimensions in millimeters

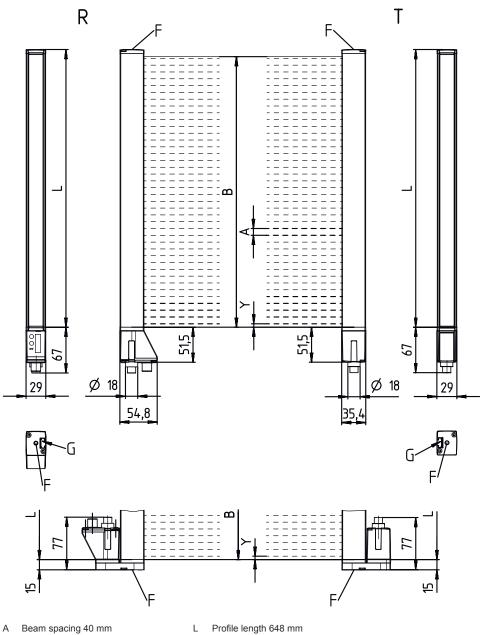

В

- Measurement field length 610 mm
- F M6 thread G Fastening groove
- R Υ 5 mm

Т

Transmitter


Receiver



Leuze

Dimensioned drawings



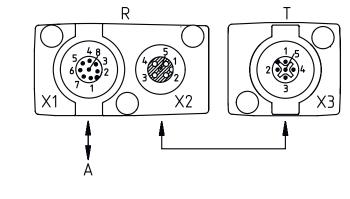

A PWR / SW IN / OUT


Electrical connection

Connection 1

Function	Configuration interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin Pin assignment

1	V+	
2	I/O 1	
3	GND	
4	IO-Link	
5	I/O 2	
6	OUT V	
7	OUT mA	
8	AGND	




Connection 2

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



Operation and display

•		
LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

 Part no.	Designation	Article	Description
50119442	CML720i-T40-610.A- M12	Light curtain transmitter	Operating range: 0.3 7 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series 720i: 720i series 730i: 730i series
Y	Device type T: transmitter R: receiver
ZZ	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note	
A list wi	th all available device types can be found on the Leuze website at www.leuze.com.

Leuze

Notes

Observe intended use!

✤ This product is not a safety sensor and is not intended as personnel protection.

 ${\ensuremath{\,\textcircled{\tiny \ensuremath{\,\Downarrow}}}}$ The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$ Only use the product in accordance with its intended use.

	For UL applications:
A	 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code). These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

 Part no.	Designation	Article	Description
50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Leuze

Accessories

Leuze

Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

	Part no.	Designation	Article	Description
ц.	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
A	✤ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.