Leuze

Technical data sheet Optical data transmission

Part no.: 50134405 DDLS 508i 120.3 L



Technical data

Encoding

Leuze


Basic data		
Series	DDLS 500	
Special version		
Special version	Integrated laser alignment aid	
	Not influenced by reflective surfaces	
	Operation of parallel light axes	
	Remote diagnosis via web server	
Optical data		
Working range	100 120,000 mm	
Light source	Laser	
Transmission frequency	F3	
Opening angle	1 °	
Electrical data		
Performance data		
Supply voltage U _B	18 30 V, DC	
Innute		
Inputs Number of digital switching inputs	1 Piece(s)	
Number of digital switching inputs	111666(3)	
Outputs		
Number of digital switching outputs	1 Piece(s)	
	(-)	
Interface		
Transmission protocol	TCP/IP 100 Mbit	
Туре	EtherNet TCP/IP	
Ethernet Architecture	Transport	
	Transparent None	
Address assignment		
Transmission speed Function	100 Mbit/s Process	
Switch functionality	None	
Transmission protocol	TCP/IP , UDP	
Connection		
Number of connections	2 Diago(a)	
Number of connections	2 Piece(s)	
Connection 1		
Type of connection	Connector	
Designation on device	POWER	
Thread size	M12	
Туре	Male	
No. of pins	5 -pin	
Encoding	A-coded	
Connection 2		
Type of connection	Connector	
Designation on device	BUS	
Thread size	M12	
Туре	Female	
No. of pins	4 -pin	


D-coded


Mechanical data				
Dimension (W x H x L)	100 mm x 156 mm x 99.5 mm			
Housing material	Metal			
Net weight	1,255 g			
Operation and display				
Type of display	Bar graph			
	LED			
Type of configuration	Software			
	Via web browser			
Environmental data				
Ambient temperature, operation	-5 50 °C			
Ambient temperature, storage	-35 70 °C			
Certifications				
Degree of protection	IP 65			
Approvals	c UL US			
Test procedure for EMC in accordance	EN 1000-6-4			
with standard	EN 61000-6-2			
Test procedure for noise in accordance with standard	EN 60068-2-64			
Test procedure for oscillation in accordance with standard	EN 60068-2-6			
Test procedure for shock in accordance with standard	EN 60068-2-27			
Classification				
Customs tariff number	84718000			
ECLASS 5.1.4	19039001			
ECLASS 8.0	19179090			
ECLASS 9.0	19179090			
ECLASS 10.0	19170506			
ECLASS 11.0	19170506			
ECLASS 12.0	19170506			
ECLASS 13.0	19170506			
ECLASS 14.0	19170506			
ECLASS 15.0	19170506			
ETIM 5.0	EC000515			
ETIM 6.0	EC000515			
ETIM 7.0	EC000515			
ETIM 8.0	EC000515			
ETIM 9.0	EC000515			
ETIM 10.0	EC000515			

Dimensioned drawings

All dimensions in millimeters

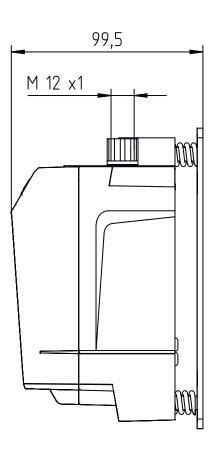

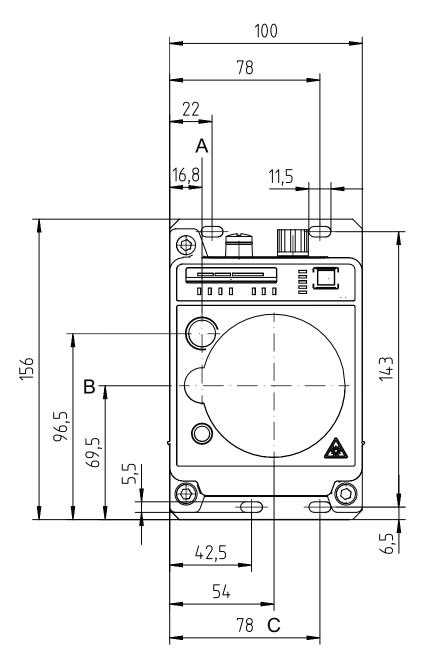



A Center axis of transmitter and alignment laser

B Center axis of transmitter and receiver

C Center axis of receiver

Leuze

Electrical connection

Connection 1	POWER
Function	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin Pin assignment

1	VIN	
2	I01	
3	GND	3
4	102	
5	FE/SHIELD	4



RIIG	
000	

Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded

TD+ RD+ TD-
TD
RD-

Operation and display

LED		Display	Meaning
1	AUT	Off	Operating mode not active
		Green, continuous light	Operating mode "Automatic"
2	MAN	Off	Operating mode not active
		Green, continuous light	Operating mode "Manual"
3	ADJ	Off	Operating mode not active
		Green, continuous light	Operating mode "Adjust"
4	LAS	Off	Operating mode not active
		Green, continuous light	Operating mode "Alignment-laser mounting support"
5	LLC	Off	Operating mode not active
		Green, continuous light	LLC without interruption
		Red, continuous light	LLC interrupted at least once
6	PWR	Off	No supply voltage
		Green, flashing	Device ok, initialization phase
		Green, continuous light	Data transmission active
		Red, flashing	Data transmission interrupted
		Red, continuous light	Device error
7	TMP	Off	Operating temperature OK
		Orange, continuous light	Operating temperature critical

Leuze



Operation and display

Leuze

LE	D	Display	Meaning
7	ТМР	Red, continuous light	Operating temperature exceeded or not met
8	LSR	Off	With function reserve
		Orange, continuous light	Device OK, warning set
9	BUS	Off	not active for the DDLS 508i
10	OLK	Off	Fault
		Green, continuous light	No data transmission
		Orange, continuous light	Data transmission active
11	ERL	Off	Link OK
		Orange, continuous light	Missing link (Ethernet cable connection) on the second device
		Red, continuous light	No cable-connected link to the connected device
12	LINK	Off	No cable-connected link to the connected device
		Green, continuous light	Link OK
		Orange, continuous light	Data transmission active
13	SIGNAL QUALITY	2 red, 2 orange and 4 green	Received signal level

Suitable receivers

 Part no.	Designation	Article	Description
50134406	DDLS 508i 120.4 L	Optical data transmission	Special version: Not influenced by reflective surfaces, Integrated laser alignment aid, Operation of parallel light axes, Remote diagnosis via web server Working range: 100 120.000 mm Transmission frequency: F4 Interface: EtherNet TCP/IP Connection: Connector, M12

Part number code

Part designation: DDLS 5XXX YYY.Z A B CC

DDLS	Optical transceiver for digital data transmission
5XXX	Series 508i: without integrated web server for remote diagnostics 508i: with integrated web server for remote diagnostics 538: without integrated web server for remote diagnostics (EtherCAT) 548i: with integrated web server for remote diagnostics
YYY	Range for data transmission in m
Z	Frequency of the transmitter 0: Frequency F0 1: Frequency F1 2: Frequency F2 3: Frequency F3 4: Frequency F4
A	Option L: integrated laser alignment aid (for transmitter/receiver) n/a: standard
В	Special equipment H: with heating n/a: no special equipment
сс	Special equipment W: transmission optics with larger opening angle (on request) n/a: no special equipment

	Note
6	S A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes

Leuze

Observe intended use!

✤ This product is not a safety sensor and is not intended as personnel protection.

b The product may only be put into operation by competent persons.



A	Do not expose users of telescopic optics!
	The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1M as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.
	∜ Do not expose users of telescopic optics!
	The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1M as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.
	Looking into the beam path for extended periods using telescope optics may damage the eye's retina. Never look using telescope optics into the lase beam or in the direction of reflecting beams.
	Scaution the carrying out of differing procedures may lead to danger exposure to radiation!
	The use of optical instruments or devices (e.g., magnifying glasses, binoculars) in combination with the device increases the danger of eye damage.
	∜ Observe the applicable statutory and local laser protection regulations.
	by The device must not be tampered with and must not be changed in any way.
	There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

ATTENTION! LASER RADIATION – CLASS 1 LASER PRODUCT (alignment laser)

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of **laser class 1** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.

th The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.

- ♦ Observe the applicable statutory and local laser protection regulations.
- ^t The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device.

Repairs must only be performed by Leuze electronic GmbH + Co. KG.

Accessories

Leuze

Connection technology - Connection cables

	Part no.	Designation	Article	Description
W D	50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC
Ŵ	50135074	KS ET-M12-4A-P7- 050	Connection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50137078	KSS ET-M12-4A- M12-4A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Connection technology - Connectors

	Part no.	Designation	Article	Description
-	50020501	KD 095-5A	Connector	Connection: Connector, M12, Axial, Female, A-coded, 5 -pin
	50112155	S-M12A-ET	Connector	Suitable for interface: Ethernet Connection: Connector, M12, Axial, Male, D-coded, 4 -pin

Accessories

Leuze

Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
6	^t ♦ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.