

## Technical data sheet

### Throughbeam photoelectric sensor receiver

Part no.: 50148157

LE53C/LG-M8



For illustration purposes only

#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Further information
- Accessories



## Technical data

### Basic data

|                     |                       |
|---------------------|-----------------------|
| Series              | 53C                   |
| Operating principle | Throughbeam principle |
| Device type         | Receiver              |

### Special version

|                 |                |
|-----------------|----------------|
| Special version | HYGIENE design |
|-----------------|----------------|

### Optical data

|                       |                            |
|-----------------------|----------------------------|
| Operating range       | 0.05 ... 8.5 m             |
| Operating range       | Guaranteed operating range |
| Operating range limit | 0.05 ... 10 m              |
| Operating range limit | Typical operating range    |

### Electrical data

|                    |   |
|--------------------|---|
| Protective circuit | Polarity reversal protection<br>Short circuit protected |
|--------------------|---|

### Performance data

|                      |  |
|----------------------|--|
| Supply voltage $U_B$ | 10 ... 30 V, DC, Incl. residual ripple |
| Residual ripple      | 0 ... 15 %, From $U_B$                 |
| Open-circuit current | 0 ... 15 mA                            |

### Outputs

|                                     |            |
|-------------------------------------|------------|
| Number of digital switching outputs | 2 Piece(s) |
|-------------------------------------|------------|

### Switching outputs

|                         |   |
|-------------------------|---|
| Voltage type            | DC  |
| Switching current, max. | 100 mA                                    |
| Switching voltage       | high: $\geq(U_B - 2V)$<br>low: $\leq 2 V$ |

### Switching output 1

|                     |  |
|---------------------|--|
| Assignment          | Connection 1, pin 4                                  |
| Switching element   | Transistor, Push-pull                                |
| Switching principle | IO-Link / light switching (PNP)/dark switching (NPN) |

### Switching output 2

|                     |  |
|---------------------|--|
| Assignment          | Connection 1, pin 2                        |
| Switching element   | Transistor, Push-pull                      |
| Switching principle | Dark switching (PNP)/light switching (NPN) |

### Time behavior

|                     |          |
|---------------------|----------|
| Switching frequency | 1,000 Hz |
| Response time       | 0.5 ms   |
| Readiness delay     | 300 ms   |

### Interface

|      |         |
|------|---------|
| Type | IO-Link |
|------|---------|

### IO-Link

|                  |                      |
|------------------|----------------------|
| COM mode         | COM2                 |
| Profile          | Smart sensor profile |
| Min. cycle time  | COM2 = 2.3 ms        |
| Frame type       | 2.1                  |
| Specification    | V1.1                 |
| Device ID        | 6019                 |
| SIO-mode support | Yes                  |

### Connection 1

|                    |   |
|--------------------|---|
| Function           | Signal IN<br>Signal OUT<br>Voltage supply |
| Type of connection | Connector                                 |
| Thread size        | M8  |
| Type               | Male                                      |
| Material           | Stainless steel                           |
| No. of pins        | 4 -pin                                    |

### Mechanical data

|                                 |  |
|---------------------------------|--|
| Dimension (W x H x L)           | 14 mm x 35.4 mm x 20.4 mm  |
| Housing material                | Stainless steel  |
| Material of operational control | Plastic (POM Hostaform C9021, copoly-ester Tritan TX1001), non-diffusive |
| Housing roughness               | Ra $\leq 0,8$ , Typical value for the stainless steel housing            |
| Stainless steel housing         | AISI 316L, DIN X2CrNiMo17132, W. No1.4404                                |
| Lens cover material             | Plastic (PMMA+) with scratch-resistant Indium protective coating         |
| Net weight                      | 48 g   |
| Housing color                   | Silver   |
| Type of fastening               | Housing fit  |
| Compatibility of materials      | CleanProof+<br>ECOLAB<br>Johnson Diversey                                |

### Operation and display

|                 |            |
|-----------------|------------|
| Type of display | LED        |
| Number of LEDs  | 2 Piece(s) |

### Environmental data

|                                |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -40 ... 70 °C |
| Ambient temperature, storage   | -40 ... 70 °C |

### Certifications


|                      |                          |
|----------------------|--------------------------|
| Degree of protection | IP 67<br>IP 68<br>IP 69K |
| Protection class     | III                      |
| Approvals            | c UL US                  |
| Standards applied    | IEC 60947-5-2            |

## Technical data

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| ECLASS 5.1.4          | 27270901 |
| ECLASS 8.0            | 27270901 |
| ECLASS 9.0            | 27270901 |
| ECLASS 10.0           | 27270901 |
| ECLASS 11.0           | 27270901 |
| ECLASS 12.0           | 27270901 |
| ECLASS 13.0           | 27270901 |
| ECLASS 14.0           | 27270901 |
| ECLASS 15.0           | 27270901 |
| ETIM 5.0              | EC002716 |
| ETIM 6.0              | EC002716 |
| ETIM 7.0              | EC002716 |
| ETIM 8.0              | EC002716 |
| ETIM 9.0              | EC002716 |
| ETIM 10.0             | EC002716 |

## Dimensioned drawings

All dimensions in millimeters

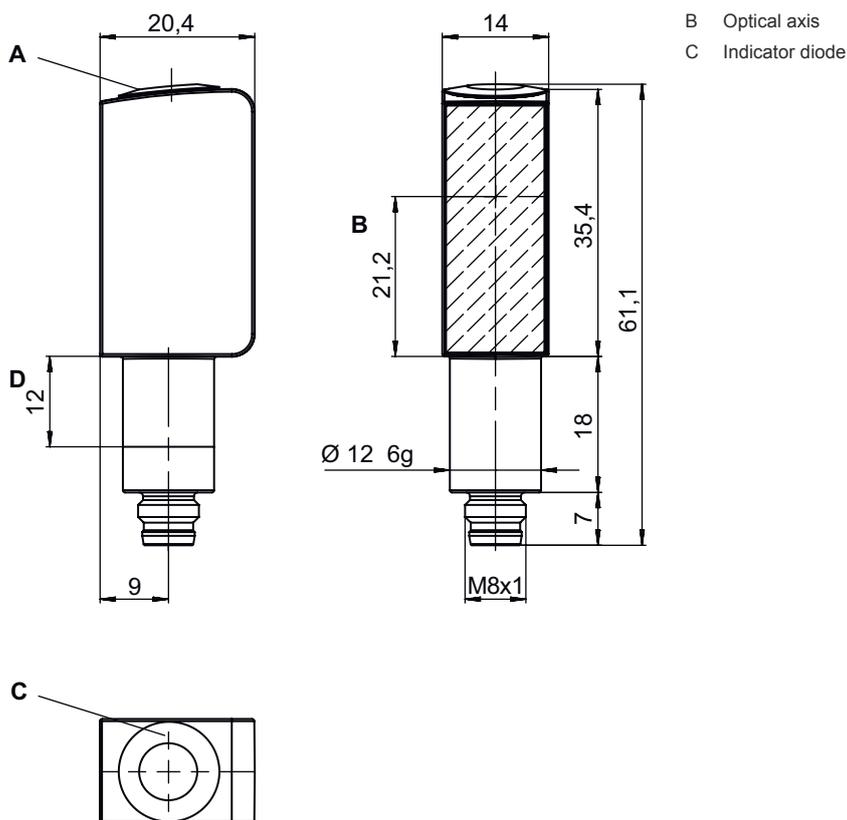


# Electrical connection

## Connection 1



|                           |                 |
|---------------------------|-----------------|
| <b>Function</b>           | Signal IN       |
|                           | Signal OUT      |
|                           | Voltage supply  |
| <b>Type of connection</b> | Connector       |
| <b>Thread size</b>        | M8              |
| <b>Type</b>               | Male            |
| <b>Material</b>           | Stainless steel |
| <b>No. of pins</b>        | 4 -pin          |

| Pin | Pin assignment  |
|-----|-----------------|
| 1   | V+              |
| 2   | OUT 2           |
| 3   | GND             |
| 4   | IO-Link / OUT 1 |



## Diagrams

### Typ. response behavior

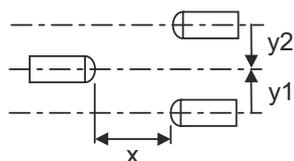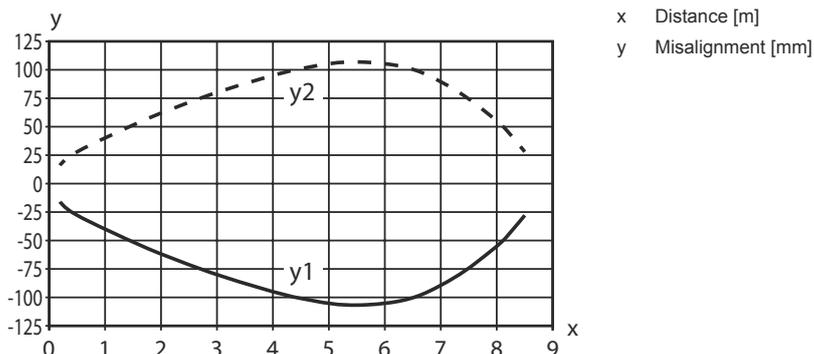

## Operation and display

| LED | Display                  | Meaning                              |
|-----|--------------------------|--------------------------------------|
| 1   | Green, continuous light  | Operational readiness                |
| 2   | Yellow, continuous light | Light path free                      |
|     | Yellow, flashing         | Light path free, no function reserve |

## Suitable transmitters

|   | Part no. | Designation | Article                                      | Description   |
|---|----------|-------------|--|---|
|  | 50148156 | LS53C/8X-M8 | Throughbeam photoelectric sensor transmitter | Special version: Activation input, HYGIENE design<br>Operating range limit: 0.05 ... 10 m<br>Light source: LED, Red<br>Supply voltage: DC<br>Connection: Connector, M8, Stainless steel, 4 -pin |

## Part number code

Part designation: AAA53C d EE-f.GGGG H/i J-K.LL

|               |   |
|---------------|---|
| <b>AAA53C</b> | <b>Operating principle / construction</b><br>HT53C: Diffuse reflection sensor with background suppression<br>LS53C: Throughbeam photoelectric sensor transmitter<br>LE53C: Throughbeam photoelectric sensor receiver<br>PRK53C: Retro-reflective photoelectric sensor with polarization filter<br>ODT53C: Distance diffuse sensor with background suppression   |
| <b>d</b>      | <b>Light type</b><br>n/a: red light<br>l: infrared light  |
| <b>EE</b>     | <b>Light source</b><br>n/a: LED<br>L1: laser class 1<br>L2: laser class 2   |
| <b>f</b>      | <b>Preset range (optional)</b><br>n/a: operating range acc. to data sheet<br>xxxF: Preset range [mm]  |
| <b>GGGG</b>   | <b>Equipment</b><br>n/a: standard<br>A: Autocollimation principle (single lens) for positioning tasks<br>F: Permanently set range<br>H2O: Detection of aqueous liquids<br>Fill-level monitoring<br>S: small light spot<br>T: autocollimation principle (single lens) for highly transparent bottles without tracking<br>TT: autocollimation principle (single lens) for highly transparent bottles with tracking<br>V: V-optics<br>XL: Extra long light spot<br>X: extended model   |
| <b>H</b>      | <b>Operating range adjustment</b><br>n/a with HT: range adjustable via 8-turn potentiometer<br>n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable<br>1: 270° potentiometer<br>3: teach-in via button   |
| <b>i</b>      | <b>Switching output/function OUT 1/IN: Pin 4 or black conductor</b><br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>6: push-pull switching output, PNP light switching, NPN dark switching<br>G: Push-pull switching output, PNP dark switching, NPN light switching<br>L: IO-Link interface (SIO mode: PNP light switching, NPN dark switching)<br>8: activation input (activation with high signal)<br>X: pin not used<br>1: IO-Link / light switching (NPN) / dark switching (PNP)<br>7: Input for sensitivity adjustment |

## Part number code

|           |   |
|-----------|---|
| <b>J</b>  | <b>Switching output / function OUT 2/IN: pin 2 or white conductor</b><br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>6: push-pull switching output, PNP light switching, NPN dark switching<br>G: Push-pull switching output, PNP dark switching, NPN light switching<br>T: teach-in via cable<br>X: pin not used<br>8: activation input (activation with high signal)<br>9: deactivation input (deactivation with high signal) |
| <b>K</b>  | <b>Electrical connection</b><br>M8: M8 connector, 4-pin (plug)  |
| <b>LL</b> | <b>Parameterization</b><br>P1: different configuration  |

### Note



A list with all available device types can be found on the Leuze website at [www.leuze.com](http://www.leuze.com).

## Notes



### Observe intended use!



- ⚡ This product is not a safety sensor and is not intended as personnel protection.
- ⚡ The product may only be put into operation by competent persons.
- ⚡ Only use the product in accordance with its intended use.

### For UL applications:



- ⚡ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- ⚡ These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

## Further information


- Light source: Average life expectancy 100,000h at an ambient temperature of 25 °C
- Response time: For short decay times, an ohmic load of approx. 5kOhm is recommended
- Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40 °C
- Permissible operating temperature range during IO-Link operation: -10 °C to +60 °C
- Ambient temperature, operation: +70 °C permissible only briefly (≤ 15min)
- IP 69K only with internal tube installation of M8 connector

## Accessories

### Connection technology - Connection unit

|  | Part no. | Designation           | Article        | Description   |
|--|----------|-----------------------|----------------|---|
|  | 50144900 | MD 798i-11-82/L5-2222 | IO-Link master | Type: IO-Link master<br>Current consumption, max.: 11,000 mA<br>Switching outputs for each sensor connection: 1 Piece(s)<br>Switching output: Transistor, PNP<br>Interface: IO-Link, Automatic protocol detection, EtherNet IP, Modbus TCP, PROFINET<br>Connections: 12 Piece(s)<br>Sensor connections: 8 Piece(s)<br>Connections for voltage supply: 2 Piece(s)<br>Interface connections: 2 Piece(s)<br>Degree of protection: IP 67, IP 65, IP 69K |

### Connection technology - Connection cables

|  | Part no. | Designation           | Article          | Description  |
|--|----------|-----------------------|------------------|--|
|   | 50148347 | KD U-M8-4A-T0-050 F+B | Connection cable | Connection 1: Connector, M8, Axial, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5.000 mm<br>Sheathing material: TPE |
|  | 50130850 | KD U-M8-4A-V1-050     | Connection cable | Connection 1: Connector, M8, Axial, Female, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5.000 mm<br>Sheathing material: PVC          |

### Mounting technology - Other

|   | Part no. | Designation       | Article         | Description   |
|---|----------|-------------------|-----------------|---|
|  | 50145361 | BTU 053M.5F-D12-T | Mounting system | Design of mounting device: Mounting system<br>Fastening, at system: Screw type<br>Mounting bracket, at device: For 12 mm rod<br>Type of mounting device: Turning, 360°, Adjustable<br>Material: Stainless steel |

#### Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.