Leuze

Technical data sheet Optical data transmission

Part no.: 50151315 DDLS 538 120.3 L H W S2



info@leuze.com • www.leuze.com changes Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2025-04-11

Leuze electronic GmbH + Co. KG

The Sensor People In der Braike 1, D-73277 Owen/Germany

We reserve the right to make technical changes eng • 2025-04-11

Technical data

Leuze


Basic data	
Series	DDLS 500
Special version	
Special version	Heating
	Integrated laser alignment aid
	Not influenced by reflective surfaces
	Operation of parallel light axes
	Wide angle version
Optical data	
Working range	100 120,000 mm
Light source	Laser
Transmission frequency	F3
Opening angle	1.6 °
Electrical data	
Deufermen es dete	
Performance data Supply voltage U _B	18 30 V, DC
Supply voltage 0 _B	18 30 V, DC
Inputs	
Number of digital switching inputs	1 Piece(s)
Outputs	
Number of digital switching outputs	1 Piece(s)
Number of digital switching outputs	1 Piece(s)
Interface	
Interface Transmission protocol	CIPsafety
Interface	
Interface Transmission protocol	CIPsafety EtherCAT link down 5 ms, EtherCAT
Interface Transmission protocol Type EtherCAT	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE)
Interface Transmission protocol Type EtherCAT Function	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process
Interface Transmission protocol Type EtherCAT Function Switch functionality	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s
Interface Transmission protocol Type EtherCAT Function Switch functionality	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE)	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE)	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process 2 Piece(s)
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process 2 Piece(s) Connector
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process 2 Piece(s) Connector POWER
Interface Transmission protocol Type EtherCAT Function Switch functionality Transmission speed Transmission protocol Safety-over-EtherCAT (FSoE) Function Connection Number of connections Connection 1 Type of connection Designation on device Thread size	CIPsafety EtherCAT link down 5 ms, EtherCAT Safety-over-EtherCAT (FSoE) Process None 100 Mbit/s EtherCAT FSoE Process 2 Piece(s) Connector POWER M12


Connection 2	
Type of connection	Connector
Designation on device	BUS
Thread size	M12
Туре	Female
No. of pins	4 -pin
Encoding	D-coded
Mechanical data	
Dimension (W x H x L)	100 mm x 156 mm x 99.5 mm
Housing material	Metal
Net weight	1,750 g
Operation and display	
Type of display	Bar graph
	LED
Environmental data	
Ambient temperature, operation	-35 50 °C
Ambient temperature, storage	-35 70 °C
Certifications	
Degree of protection	IP 65
Approvals	c UL US
Test procedure for EMC in accordance	EN 1000-6-4
with standard	EN 61000-6-2
Test procedure for noise in accordance with standard	EN 60068-2-64
	EN 60068-2-64 EN 60068-2-6
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in	
with standard Test procedure for oscillation in accordance with standard	EN 60068-2-6
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in	EN 60068-2-6
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard	EN 60068-2-6
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard Classification	EN 60068-2-6 EN 60068-2-27
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard Classification Customs tariff number	EN 60068-2-6 EN 60068-2-27 84718000
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard Classification Customs tariff number ECLASS 5.1.4	EN 60068-2-6 EN 60068-2-27 84718000 19039001
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090
with standardTest procedure for oscillation in accordance with standardTest procedure for shock in accordance with standardClassificationCustoms tariff numberECLASS 5.1.4ECLASS 8.0ECLASS 9.0ECLASS 10.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090 19170506
with standardTest procedure for oscillation in accordance with standardTest procedure for shock in accordance with standardClassificationCustoms tariff numberECLASS 5.1.4ECLASS 8.0ECLASS 9.0ECLASS 10.0ECLASS 11.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090 19170506 19170506
with standardTest procedure for oscillation in accordance with standardTest procedure for shock in accordance with standardClassificationCustoms tariff numberECLASS 5.1.4ECLASS 8.0ECLASS 9.0ECLASS 10.0ECLASS 11.0ECLASS 12.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090 19170506 19170506 19170506
with standardTest procedure for oscillation in accordance with standardTest procedure for shock in accordance with standardClassificationCustoms tariff numberECLASS 5.1.4ECLASS 8.0ECLASS 9.0ECLASS 10.0ECLASS 11.0ECLASS 12.0ECLASS 13.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 13.0 ECLASS 13.0 ECLASS 14.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506
with standardTest procedure for oscillation in accordance with standardTest procedure for shock in accordance with standardClassificationCustoms tariff numberECLASS 5.1.4ECLASS 8.0ECLASS 9.0ECLASS 10.0ECLASS 11.0ECLASS 12.0ECLASS 13.0ECLASS 14.0ECLASS 15.0ETIM 5.0ETIM 6.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506 19170506 19170506
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 12.0 ECLASS 12.0 ECLASS 13.0 ECLASS 14.0 ECLASS 15.0 ETIM 5.0 ETIM 6.0 ETIM 7.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19170506 19170506 19170506 19170506 19170506 19170506 19170506 19170506 EC000515
with standardTest procedure for oscillation in accordance with standardTest procedure for shock in accordance with standardClassificationCustoms tariff numberECLASS 5.1.4ECLASS 8.0ECLASS 9.0ECLASS 10.0ECLASS 11.0ECLASS 12.0ECLASS 13.0ECLASS 14.0ECLASS 15.0ETIM 5.0ETIM 6.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506 19170506 EC000515 EC000515
with standard Test procedure for oscillation in accordance with standard Test procedure for shock in accordance with standard Classification Customs tariff number ECLASS 5.1.4 ECLASS 5.1.4 ECLASS 8.0 ECLASS 9.0 ECLASS 9.0 ECLASS 10.0 ECLASS 11.0 ECLASS 12.0 ECLASS 12.0 ECLASS 12.0 ECLASS 13.0 ECLASS 14.0 ECLASS 15.0 ETIM 5.0 ETIM 6.0 ETIM 7.0	EN 60068-2-6 EN 60068-2-27 84718000 19039001 19179090 19179090 19170506 19170506 19170506 19170506 19170506 19170506 19170506 EC000515 EC000515 EC000515


Dimensioned drawings

Leuze

All dimensions in millimeters

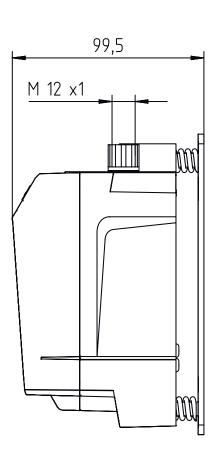

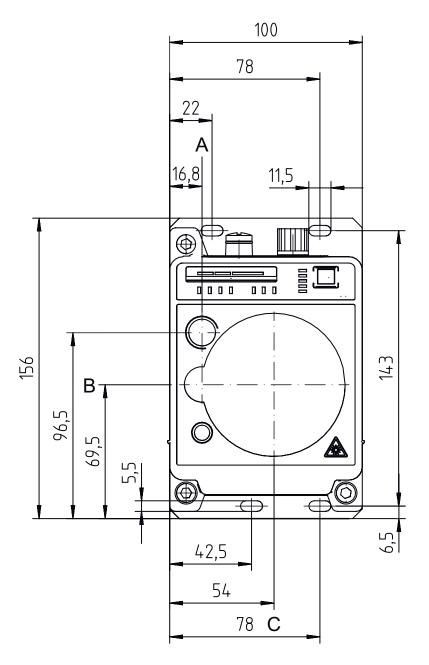



A Center axis of transmitter and alignment laser

B Center axis of transmitter and receiver

C Center axis of receiver

Electrical connection

Connection 1 Signal IN Function Signal OUT Voltage supply Type of connection Connector Thread size M12 Male Туре Material Metal 5 -pin No. of pins Encoding A-coded

Pin Pin assignment

1	VIN	- Â
2	IO1	
3	GND	3
4	102	
5	FE/SHIELD	4

₽E

Connection 2

Connection 2	BUS
Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded


Pin	Pin assignment	
1	TD+	
2	RD+	
3	TD-	
4	RD-	

Operation and display

LED		Display	Meaning	
1	AUT	Off	Operating mode not active	
		Green, continuous light	Operating mode "Automatic"	
2	MAN	Off	Operating mode not active	
		Green, continuous light	Operating mode "Manual"	
3	ADJ	Off	Operating mode not active	
		Green, continuous light	Operating mode "Adjust"	
4	LAS	Off	Operating mode not active	
		Green, continuous light	Operating mode "Alignment-laser mounting support"	
5	LLC	Off	Operating mode not active	
	Green, continuous light	LLC without interruption		
		Red, continuous light	LLC interrupted at least once	
6	PWR	Off	No supply voltage	
		Green, flashing	Device ok, initialization phase	
		Green, continuous light	Data transmission active	
		Red, flashing	Data transmission interrupted	
		Red, continuous light	Device error	
7	TMP	Off	Operating temperature OK	
		Orange, continuous light	Operating temperature critical	









Operation and display

Leuze

LED	Display	Meaning
7 TMP	Red, continuous light	Operating temperature exceeded or not met
8 LSR	Off	With function reserve
	Orange, continuous light	Device OK, warning set
9 MAS	Off	Installation on slave side
	Green, continuous light	Installation on master side
10 OLK	Off	Fault
	Green, continuous light	No data transmission
	Orange, continuous light	Data transmission active
11 ERL	Off	Link OK
	Orange, continuous light	Missing link (Ethernet cable connection) on the second device
	Red, continuous light	No cable-connected link to the connected device
12 LINK	Off	No cable-connected link to the connected device
	Green, continuous light	Link OK
	Orange, continuous light	Data transmission active
13 SIGNA QUALI		Received signal level

Suitable transmitters

 Part no.	Designation	Article	Description
50151316	DDLS 538 120.4 L H W S2	Optical data transmission	Special version: Heating, Integrated laser alignment aid, Not influenced by reflective surfaces, Operation of parallel light axes, Wide angle version Working range: 100 120,000 mm Transmission frequency: F4 Interface: EtherCAT link down 5 ms Connection: Connector, M12

Suitable receivers

 Part no.	Designation	Article	Description
50151316	DDLS 538 120.4 L H W S2	Optical data transmission	Special version: Heating, Integrated laser alignment aid, Not influenced by reflective surfaces, Operation of parallel light axes, Wide angle version Working range: 100 120,000 mm Transmission frequency: F4 Interface: EtherCAT link down 5 ms Connection: Connector, M12

Part number code

Part designation: DDLS 5XXX YYY.Z A B CC

DDLS	Optical transceiver for digital data transmission
5XXX	Series 508i: without integrated web server for remote diagnostics 508i: with integrated web server for remote diagnostics 538: without integrated web server for remote diagnostics (EtherCAT) 548i: with integrated web server for remote diagnostics
YYY	Range for data transmission in m
Z	Frequency of the transmitter 0: Frequency F0 1: Frequency F1 2: Frequency F2 3: Frequency F3 4: Frequency F4
A	Option L: integrated laser alignment aid (for transmitter/receiver) n/a: standard

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the right to make technical changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-0 • gat: +49 7021 57

Part number code



В	Special equipment H: with heating n/a: no special equipment
cc	Special equipment W: Transmission optics with larger beam spread S3: Optimized for EtherCAT transmission n/a: no special equipment
6	♥ A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes

	Observe intended use!
	b This product is not a safety sensor and is not intended as personnel protection.
	b The product may only be put into operation by competent persons.
\frown	∜ Only use the product in accordance with its intended use.

For UL applications:
* For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).

ATTENTION! INVISIBLE LASER RADIATION - CLASS 1M LASER PRODUCT
Do not expose users of telescopic optics! The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1M as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.
Contexpose users of telescopic optics! The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1M as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.
Shocking into the beam path for extended periods using telescope optics may damage the eye's retina. Never look using telescope optics into the laser beam or in the direction of reflecting beams.
 CAUTION! The use of operating and adjusting devices other than those specified here or the carrying out of differing procedures may lead to dangerous exposure to radiation! The use of optical instruments or devices (e.g., magnifying glasses, binoculars) in combination with the device increases the danger of eye damage.
t ⇔ Observe the applicable statutory and local laser protection regulations.
 The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

Notes

	ATTENTION! LASER RADIATION – CLASS 1 LASER PRODUCT (alignment laser)
$\mathbf{\wedge}$	The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.
	The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of laser class 1 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.
	♦ Observe the applicable statutory and local laser protection regulations.
	 The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

Accessories

Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC
Ŵ	50135074	KS ET-M12-4A-P7- 050	Connection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50137078	KSS ET-M12-4A- M12-4A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Leuze

Accessories

Leuze

Connection technology - Connectors

	Part no.	Designation	Article	Description
-	50020501	KD 095-5A	Connector	Connection: Connector, M12, Axial, Female, A-coded, 5 -pin
Contraction of the second	50112155	S-M12A-ET	Connector	Suitable for interface: Ethernet Connection: Connector, M12, Axial, Male, D-coded, 4 -pin

Services

	Part no.	Designation	Article	Description
y; U	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
6	S A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.