

Technical data sheet Throughbeam photoelectric sensor transmitter

Part no.: 50117694

LS5/9D



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Suitable receivers
- Part number code
- Notes
- Further information
- Accessories









Technical data



Basic data

Series	5
Operating principle	Throughbeam principle
Device type	Transmitter
Special version	
Special version	Deactivation input
Optical data	
Operating range	0 10 m (guaranteed operating range)
Operating range limit	0 15 m (typical operating range)
Light source	LED, Red
Wavelength	620 nm
Transmitted-signal shape	Pulsed
LED group	Exempt group (in acc. with EN 62471)
Flectrical data	

Electrical data

Protective circuit	Polarity reversal protection	
		Short circuit protected
	Performance data	
	Supply voltage U _B	10 30 V, DC, Incl. residual ripple
	Residual ripple	0 15 %, From U _B
	Open-circuit current	0 15 mA
Inputs	Inputs	
	Number of deactivation inputs	2 Piece(s)

Deactivati	ion i	nputs
_		

Deactivation inputs	
Туре	Deactivation input
Deactivation input 1 Active switching state	Low
Deactivation input 2 Active switching state	High

Time behavior

Readiness delay	300 ms
Connection	

1 Piece(s)

Connection 1

Number of connections

Connection	
Function	Signal IN
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm ²

Mechanical data

Dimension (W x H x L)	14 mm x 32.5 mm x 20.2 mm
Housing material	Plastic
Plastic housing	ABS
Lens cover material	Plastic
Net weight	70 g
Housing color	Black
	Red
Recommended tightening torque for M3 fastening	0.9 N·m

Operation and display

Type of display	LED
Number of LEDs	2 Piece(s)

Environmental data

Ambient temperature, operation	-40 60 °C
Ambient temperature, storage	-40 70 °C

Certifications

Degree of protection	IP 67
Protection class	III
Approvals	c UL US
Standards applied	IEC 60947-5-2


Classification

85365019
27270901
27270901
27270901
27270901
27270901
27270901
27270901
27270901
27270901
EC002716

Dimensioned drawings

Leuze

All dimensions in millimeters

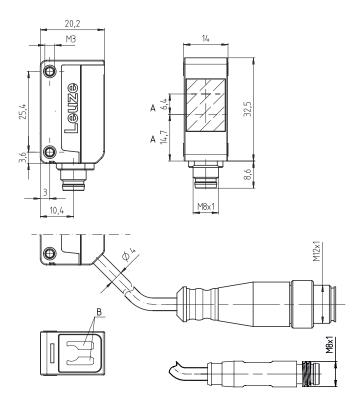

- Optical axis
- Indicator diode

Electrical connection

Connection 1

Function	Signal IN
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm ²

Conductor color


Brown	V+
White	ln2
Blue	GND
Black	In1

Conductor assignment


Diagrams

Leuze

Typ. response behavior

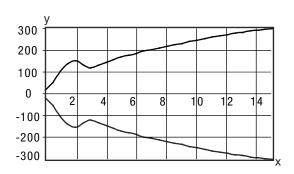

- Distance [m]
- Misalignment [mm]



Operation and display

LED	Display	Meaning	
1	Green, continuous light	Operational readiness	
2	Yellow, continuous light	Transmitted beam active	

Suitable receivers

Part no.	Designation	Operating range Operating range limit	Description
50132420	LE5/2	0 10 m 0 15 m	Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, NPN, Light switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 3 -wire
50117688	LE5/2N	0 10 m 0 15 m	Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, NPN, Light switching Switching output 2: Transistor, NPN, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 4 -wire
50132417	LE5/4	0 10 m 0 15 m	Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, PNP, Light switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 3 -wire
50117691	LE5/4P	0 10 m 0 15 m	Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, PNP, Light switching Switching output 2: Transistor, PNP, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 4 -wire

info@leuze.com • www.leuze.com





Part no.	Designation	Operating range Operating range limit	Description
50135925	LE5/N	0 8 m 0 12 m	Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, NPN, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 3 -wire
50135926	LE5/P	0 8 m 0 12 m	Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, PNP, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 3 -wire

Part number code

Part designation: AAA5d.EE/ ff-GG-hh-I

AAA5	Operating principle / construction HT5: diffuse reflection sensor with background suppression LS5: throughbeam photoelectric sensor transmitter LE5: throughbeam photoelectric sensor receiver ET5: energetic diffuse reflection sensor FT5: diffuse reflection sensor with fading PRK5: retro-reflective photoelectric sensor with polarization filter
d	Light type n/a: red light I: infrared light
EE	Equipment 1: adjustable range M: for semi-transparent objects H: For the detection of transparent films X: reinforced fading 3: teach-in via button R: combination product for reflector DTKS 30x50
ff	Switching output / function / OUT1OUT2 (OUT1 = pin 4, OUT2 = pin 2) 2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching X: pin not used 9: deactivation input (deactivation with high signal) D: Deactivation input (deactivation with low signal)
GG	Version P1: narrow light beam
hh	Electrical connection n/a: cable, standard length 2000 mm, 4-wire M8: M8 connector, 4-pin (plug) M8.3: M8 connector, 3-pin (plug) 200-M8: cable, length 200 mm with M8 connector, 4-pin, axial (plug) 200-M8.3: cable, length 200 mm with M8 connector, 3-pin, axial (plug) 200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug) M8.1: Snap-in, M8 connector, 4-pin (plug)
I	Parameterization P1: different configuration

Note



 $\ ^{\mbox{\tiny $\mbox{$\psi$}}}$ A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes





Observe intended use!



- \$ This product is not a safety sensor and is not intended as personnel protection.
- \$ The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

For UL applications:



- ♦ Only for use in "class 2" circuits
- 🔖 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Further information

• Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40 °C

Accessories

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
5.	50118542	BT 200M.5	Mounting bracket	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type, Suited for M3 screws Type of mounting device: Adjustable Material: Stainless steel
	50124651	BT 205M-10SET	Mounting device set	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Rigid Material: Metal

Mounting technology - Rod mounts

	Part no.	Designation	Article	Description
de	50117829	BTP 200M-D12	Mounting system	Design of mounting device: Protection hood Fastening, at system: For 12 mm rod Mounting bracket, at device: Screw type Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal





Part no.	Designation	Article	Description
50117255	BTU 200M-D12	Mounting system	Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type, Suited for M3 screws Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal

Note



🖔 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.