Technisch gegevensblad
Informatie over de encoderseries
Art.-nr.: 91000230
EM-M 058 SF SSI



Afbeelding kan afwijken

Inhoud

- Technische gegevens
- Artikelsleutel

Serie	EM-M 058 SF
Basisprincipe	absoluut
Functieprincipe	magnetisch
Flensdiameter	Ø 58 mm
Flenstype	Klemflens
Massieve as/Holle as	Massieve as
Asdiameter	Ø 10 mm
Voedingsspanning	4,75 - 32 V DC
Uitgangscircuit	R-C
Aantal impulsen	1 ... 16 Bit / 0 ... 43 Bit

Technische gegevens

Leuze

Encoder EM-M 058 SF SSI

Mechanical Data

Flange	clamping flange
Flange material	stainless steel, V4A
Housing material	stainless steel, V4A
Flange diameter	Ø 58 mm [Ø 2.283"]

Shaft(s)

Shaft material	stainless steel, V4A
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature
Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 18 mm [0.709"]
Max. Permissible shaft loading radial	100 N [10.197 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10'9 revs. at 100 % rated shaft load 1 x 10'10 revs. at 40 % rated shaft load 1 x 10'11 revs. at 20 % rated shaft load
Max. operating speed	3600 rpm

Machinery Directive: basic data safety integrity level

$MTTF_d$	1000 a
Mission time (TM)	20 a
Nominale service life (L10h)	1 x 10'11 revs. at 20 % rated shaft load and 3600 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 32 VDC: typ. 50 mA
Power consumption	max. 0.5 W
Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 80 mA
Power consumption	max. 0.44 W
Operating principle	magnetic

Sensor data

Single-turn technology	innovative hall sensor technology
Single-turn resolution	up to 65,536 steps/360° (16 bit)
Single-turn accuracy	± 0.0878° (≤ 12 bit)
Single-turn repeat accuracy	± 0.0878° (≤ 12 bit)
Internal cycle time	≤ 600 µs
Multi-turn technology	Wiegand wire technology no battery and no gear.
Multi-turn resolution	up to 43 bit.

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
Includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3 DIN EN 61326-1
Vibration: (DIN EN 60068-2-6)	300 m/s^2 (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	5000 m/s^2 (6 ms)
Electrial Safety:	according DIN VDE 0160
Turn on time:	<1,5 s


Duty information

Customs tariff number:	90318020
Country of origin:	Germany


Interface

Interface:	SSI
Clock input:	via opto-coupler; I > 1.6 mA; U > 2.2 V
Clock frequency:	100 kHz up to 500 kHz, up to 2 MHz on request
Data output:	RS485/RS422 compatible
Output code:	gray or binary
SSI output:	Angular-/position value
Parity bit:	optional (even/odd)
Error bit:	optional
Turn on time:	<1,5 s
Configuration inputs Positive direction of counting: (View on shaft)	DIR = GND -> cw DIR = +UB -> ccw
Set to zero:	Set: Preset = +UB for 2 s Deaktivate: Preset = GND

Transmission protocoll SSI Single transmission:

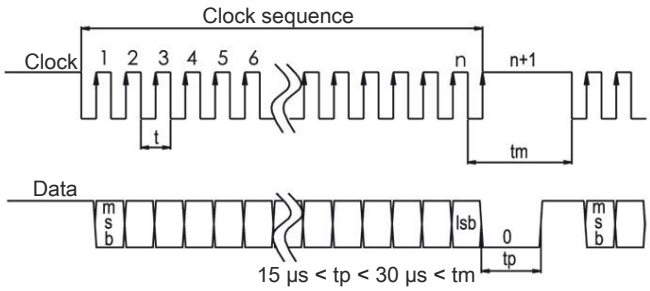

Transmission protocol SSI Multipath transmission:

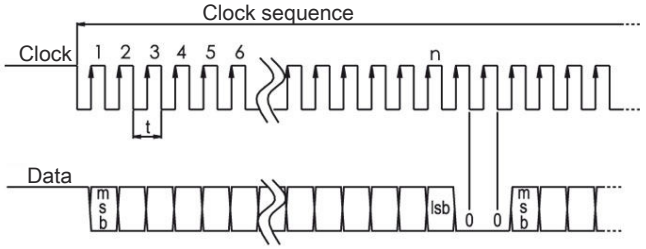

Technische gegevens

Encoder EM-M 058 SF SSI

LED-behaviour:	
At Start / while booting:	- red gleam (< 2,3 s)
Malfunction:	- constant red gleam (> 2,3 s)
Normal function:	- constant green gleam
No supply:	- no gleam


General Data

Weight	approx. 600 g [21.164 oz]
Connections	cable outlet (TPE)
Protection rating (EN 60529)	IP67+IP69K all around
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F]
Storage temperature	-20 °C up to +80 °C [-4 °F up to +176 °F]

Technische gegevens

Encoder EM-M 058 SF SSI

Cable connection R-C radial with 2 m cable

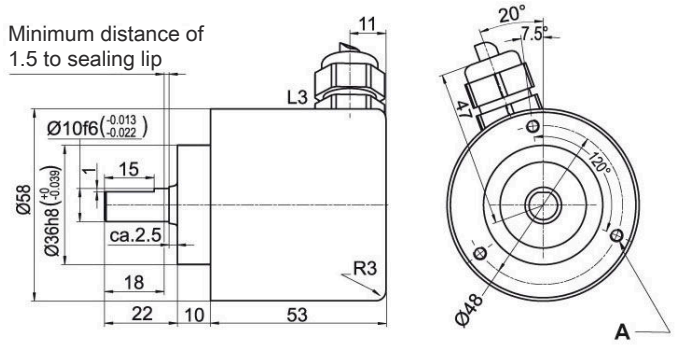

A 3x M4x0.7 - 6H, 8 deep

All dimensions in mm

L3 → R-C

Description

R-C	radial, shield connected to encoder housing

Assignments

	A-C
GND	OG
(+) Vcc	BN
SSI CLK+	GN
SSI CLK-	YE
SSI DATA+	GY
SSI DATA-	PK
PRESET	BU
DIR	RD
Shield	housing

Technische gegevens

Leuze

Encoder EM-M 058 SF SSI

Example Order No.	Type	Your encoder
EM50 058 SF	EM-M 058 SF	EM50 058 SF

	Shaft	Order key
10	Ø 10 mm [Ø 0.394"]	10

	Single-turn Resolution	Order key
12	Single-turn resolution 1 bit up to 16 bit, recommended min. 6 bit (e. G. 12 bit)	12

	Multi-turn Resolution	Order key
12	Multi-turn up to 43 bit (e. G. 12 bit) No Multi-turn = 00	12

	Data protocol	Order key
06	SSI binary	06
	SSI gray 07	

	Power supply	Order key
0	4.75 V up to 32 V (standard)	0
	4.75 V up to 5.5 V	1

	Galvanic isolation	Order key
1	yes	1

	Electrical connections	Order key
R-C	**Cable:** radial, shield connected to encoder housing	R-C

Artikelsleutel

Artikelaanduiding: **EABB CCCDDEE FFFFFF GHHJKK LLMNNOPPP RR**

A	**Type encoder** I: incrementeel S: Absolut, Singleturn M: Absolut, Multiturn
BB	**Serie** 10: Entry 30: Basic 50: Extended 70: Advanced
CCC	**Flensdiameter** 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	**Flenstype** BB: holle as met blindgat CC: klemflens (compacte uitvoering) CF: klemflens (voedingsmiddelen en dranken) CH: klemflens (uitvoering voor zware belasting) CL: klemflens HL: holle as (geïsoleerd) HO: holle as HT: holle as (speciale koppelsteun) RC: ronde flens (36/40 klemflens, 58 met 6 mm-as) RE: ronde flens (vergrote boringen) RN: ronde fles SC: statorkoppeling SF: schroefflens (53 klemflens, 58 levensmiddelen en dranken) SI: Servoflens (verhoogde asbelasting en IP-bescherming) SQ: vierkante flens SR: schroefflens (36/40 klemflens, 58 corrosiebestendig) SY: Synchro (incrementaal), Servo (36), Synchro (58) (absoluut) TM: snelheidsmeter (115 met as van 1 mm, 58 met motorfeedback) TS: snelheidsmeter (10 mm-as)
EE	**Schacht-/boringsdiameter** 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: doorlopende/blinde boring (6 ... 72 mm)
FFFFFF	**Signaal/oplossing** Axxxxx: A Bxxxxx: AB Nxxxxx: ABN P16384: programmeerbaar xx: Singleturn, 1 ... 16 Bit xx: Multiturn, 0 ... 43 Bit (00 bij Singleturn)
G	**Galvanische scheiding (alleen absoluut)** 0: zonder 1: met
HH	**Spanningsvoorziening (alleen absoluut)** 0: 10 ... 32 V DC/met galvanische scheiding 1: 4,75 ... 5,5 V DC 2: 18 ... 30 V DC
J	**Werkingsprincipe** M: magnetisch O: optisch P: optisch geïnterpoleerd

Artikelsleutel

KK	**Interface** 01: RS485 06: SSI binair 07: SSI Gray 08: Ethernet universeel 35: CANopen 38: EtherCAT 42: IO-Link 48: PROFINET 58: EtherNet/IP 68: CANopen lift 78: CAN SAE J1939
LL	**Elektrische aansluiting** M08: ronde stekker M8 M12: ronde stekker M12 M16: ronde stekker M16 M23: ronde stekker M23 M12BC: stekker voor buskap
M	**Kabeluitgang** A: axiaal R: radiaal T: Tangential
NN	**Aantal polen** xx: aantal polen
O	**Afschermingsverbinding (kabel van 2 m) (optioneel)** C: aangesloten N: niet aangesloten
PPP	**Kabellengte** xxx: kabellengte (in dm)

Opmerking

↳ Een lijst met alle beschikbare apparaattypen vindt u op de webpagina van Leuze via www.leuze.com.

Leuze