技术数据表

旋转编码器系列信息

配件编号: 91000220

EM-M 058 SR SSI



图片可能不同

内容

- 技术参数
- 产品型号描述

系列	EM-M 058 SR
基本原理	绝对
工作原理	磁性
法兰直径	Ø 58 mm
法兰型号	夹紧法兰
实心轴/空心轴	实心轴
轴直径	Ø 10 mm
供电电压	4.75 ... 32 V DC
输出电路	M12A08S
	M12R08S
脉冲数	1 ... 16 Bit / 0 ... 43 Bit

技术参数

Encoder EM-M 058 SR SSI

Mechanical Data

Flange	clamping flange
Flange material	Aluminum, anodized natur
Housing material	steel case chrome-plated, magnetic shielding
Flange diameter	Ø 58 mm [Ø 2.283"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature
Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 18 mm [0.709"]
Max. Permissible shaft loading radial	100 N [10.197 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10'9 revs. at 100 % rated shaft load 1 x 10'10 revs. at 40 % rated shaft load 1 x 10'11 revs. at 20 % rated shaft load
Max. operating speed	3600 rpm

Machinery Directive: basic data safety integrity level

$MTTF_d$	1000 a
Mission time (TM)	20 a
Nominale service life (L10h)	1 x 10'11 revs. at 20 % rated shaft load and 3600 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 32 VDC: typ. 50 mA
Power consumption	max. 0.5 W
Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 80 mA
Power consumption	max. 0.44 W
Operating principle	magnetic

Sensor data

Single-turn technology	innovative hall sensor technology
Single-turn resolution	up to 65,536 steps/360° (16 bit)
Single-turn accuracy	± 0.0878° (≤ 12 bit)
Single-turn repeat accuracy	± 0.0878° (≤ 12 bit)
Internal cycle time	≤ 600 µs
Multi-turn technology	Wiegand wire technology no battery and no gear.
Multi-turn resolution	up to 43 bit.

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
Includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3 DIN EN 61326-1
Vibration: (DIN EN 60068-2-6)	300 m/s^2 (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	5000 m/s^2 (6 ms)
Electrial Safety:	according DIN VDE 0160
Turn on time:	<1,5 s


Duty information

Customs tariff number:	90318020
Country of origin:	Germany


Interface

Interface:	SSI
Clock input:	via opto-coupler; I > 1.6 mA; U > 2.2 V
Clock frequency:	100 kHz up to 500 kHz, up to 2 MHz on request
Data output:	RS485/RS422 compatible
Output code:	gray or binary
SSI output:	Angular-/position value
Parity bit:	optional (even/odd)
Error bit:	optional
Turn on time:	<1,5 s
Configuration inputs Positive direction of counting: (View on shaft)	DIR = GND -> cw DIR = +UB -> ccw
Set to zero:	Set: Preset = +UB for 2 s Deaktivate: Preset = GND

Transmission protocoll SSI Single transmission:

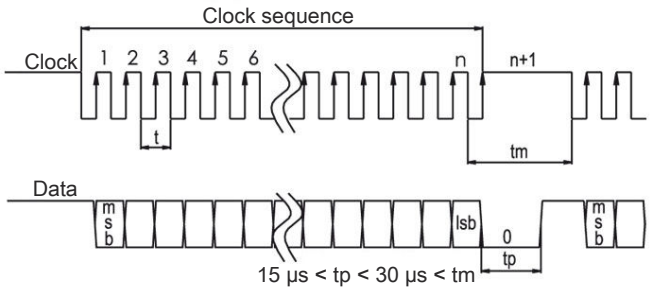

Transmission protocol SSI Multipath transmission:

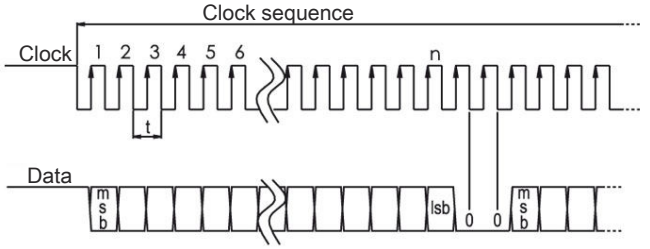

技术参数


Encoder EM-M 058 SR SSI

LED-behaviour:	
At Start / while booting:	- red gleam (< 2,3 s)
Malfunction:	- constant red gleam (> 2,3 s)
Normal function:	- constant green gleam
No supply:	- no gleam

General Data

Weight	approx. 200 g [7.055 oz]
Connections	connector outlet
Protection rating (EN 60529)	IP67+IP69K all around
Operating temperature	-40 °C up to +85 °C [-40 °F up to +185 °F]
Storage temperature	-40 °C up to +100 °C [-40 °F up to +212 °F]

Connector, M12x1 M12A08S, axial, 8-pin

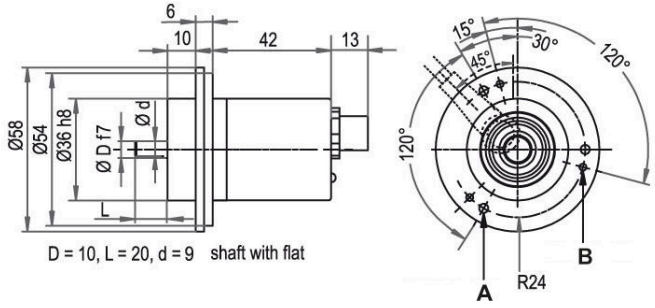

A M4x0.7 - 6H
B M3x0.5 - 6H


All dimensions in mm

CB8 → M12A08S

Description

M12A08S axial, 8-pin, shield connected to encoder housing


Assignments

	M12A08S
	
GND	1
(+) Vcc	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	housing

技术参数

Encoder EM-M 058 SR SSI

Connector, M12x1 M12R08S, radial, 8-pin

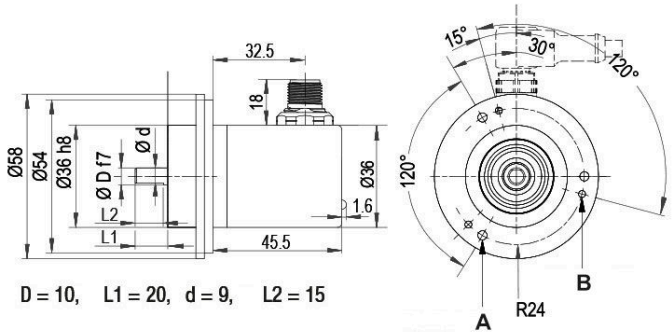

A M4x0.7 - 6H
B M3x0.5 - 6H


All dimensions in mm

CC8 → M12R08S

Description

M12R08S	radial, 8-pin, shield connected to encoder housing

Assignments

	M12R08S
	
GND	1
(+) Vcc	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	housing

技术参数

Encoder EM-M 058 SR SSI

Example Order No.	Type	Your encoder
EM50 058 SR	EM-M 058 SR	EM50 058 SR

	Shaft	Order key
10	Ø 10 mm [Ø 0.394"]	10

	Single-turn Resolution	Order key
12	Single-turn resolution 1 bit up to 16 bit, recommended min. 6 bit (e. G. 12 bit)	12

	Multi-turn Resolution	Order key
12	Multi-turn up to 43 bit (e. G. 12 bit) No Multi-turn = 00	12

	Data protocol	Order key
06	SSI binary	06
	SSI gray 07	

	Power supply	Order key
0	4.75 V up to 32 V (standard)	0
	4.75 V up to 5.5 V	1

	Galvanic isolation	Order key
1	yes	1

	Electrical connections	Order key
	Connector:	
M12A08S	sensor-connector, M12x1, 8-pin, axial, shield connected to encoder housing	M12A08S
	sensor-connector, M12x1, 8-pin, radial, shield connected to encoder housing	M12R08S

产品型号描述

产品名称： EABB CCCDDEE FFFFFF GHHJKK LLMNNOPPP RR

A	旋转编码器型号 I：增量 S：绝对，单圈 M：绝对，多圈
BB	系列 10：条目 30：基本型 50：扩展型 70：高级版
CCC	法兰直径 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100：100 mm 115: 115 mm
DD	法兰型号 BB：带有盲孔钻孔的空心轴 CC：夹紧法兰（紧凑结构形式） CF：夹紧法兰（食品和饮料） CH：夹紧法兰（重负载规格） CL：夹紧法兰 HI：空心轴（绝缘） HO：空心轴 HT：空心轴（特殊扭矩支承） RC：圆形法兰（36/40 夹紧法兰，58 带 6-mm-轴） RE：圆形法兰（扩展钻孔） RN：圆形法兰 SC：定子联轴器 SF：螺栓法兰（53 夹紧法兰，58 食品和饮料） SI：伺服法兰（高级轴负载和 IP 地址） SQ：方形法兰 SR：螺栓法兰（36/40 夹紧法兰，58 耐腐蚀） SY：同步（增量），伺服 (36)，同步 (58)（绝对） TM：转速计（115 带 1-mm-轴，58 电机反馈） TS：转速计（10-mm-轴）
EE	轴-/钻孔直径 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72：空心/盲孔钻孔 (6 ... 72 mm)
FFFFFF	信号/分辨率 Axxxxx: A Bxxxxx: AB Nxxxxx: ABN P16384：可编程 xx：单圈，1 ... 16 位 xx：多圈，0 ... 43 位（单圈时为 00）
G	电隔离（仅绝对） 0：无 1：带有
HH	供电电源（仅绝对） 0：10 ... 32 V DC/带电隔离 1: 4.75 ... 5.5 V DC 2: 18 ... 30 V DC
J	工作原理 M：磁性 O：光学 P：光学插值

产品型号描述

KK	接口 01: RS485 06：SSI 二进制 07：SSI Gray 08：通用以太网 35: CANopen 38: EtherCAT 42：IO-Link 48: PROFINET 58: EtherNet/IP 68：CANopen lift 78：CAN SAE J1939
LL	电气连接 M08：圆形插头 M8 M12：圆形插头 M12 M16：圆形插头 M16 M23：圆形插头 M23 M12BC：总线罩插头
M	电缆出口 A：轴向 R：径向 T：正切
NN	引脚数 xx：引脚数
O	屏蔽接口（2-m-电缆）（可选） C：已连接 N：未连接
PPP	电缆长度 xxx：电缆长度（单位为 dm）

注意



所有可用设备类型列表请查阅劳易测的网站 www.leuze.com。

Leuze