Fiche technique

Informations sur la gamme de codeurs rotatifs

Art. n°: 91000220

EM-M 058 SR SSI



Figure pouvant varier

Contenu

- Caractéristiques techniques
- Code d'article

Série	EM-M 058 SR
Principe de base	absolu
Principe de fonctionnement	magnétique
Diamètre de bride	Ø 58 mm
Type de bride	Bride de serrage
Arbre plein/arbre creux	Arbre plein
Diamètre d'arbre	Ø 10 mm
Tension d'alimentation	4,75 ... 32 V CC
Commande de sortie	M12A08S
	M12R08S
Nombre d'impulsions	1 ... 16 Bit / 0 ... 43 Bit

Caractéristiques techniques

Leuze

Encoder EM-M 058 SR SSI

Mechanical Data

Flange	clamping flange
Flange material	Aluminum, anodized natur
Housing material	steel case chrome-plated, magnetic shielding
Flange diameter	Ø 58 mm [Ø 2.283"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature
Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 18 mm [0.709"]
Max. Permissible shaft loading radial	100 N [10.197 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10'9 revs. at 100 % rated shaft load 1 x 10'10 revs. at 40 % rated shaft load 1 x 10'11 revs. at 20 % rated shaft load
Max. operating speed	3600 rpm

Machinery Directive: basic data safety integrity level

$MTTF_d$	1000 a
Mission time (TM)	20 a
Nominale service life (L10h)	1 x 10'11 revs. at 20 % rated shaft load and 3600 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 32 VDC: typ. 50 mA
Power consumption	max. 0.5 W
Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 80 mA
Power consumption	max. 0.44 W
Operating principle	magnetic

Sensor data

Single-turn technology	innovative hall sensor technology
Single-turn resolution	up to 65,536 steps/360° (16 bit)
Single-turn accuracy	± 0.0878° (≤ 12 bit)
Single-turn repeat accuracy	± 0.0878° (≤ 12 bit)
Internal cycle time	≤ 600 µs
Multi-turn technology	Wiegand wire technology no battery and no gear.
Multi-turn resolution	up to 43 bit.

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
Includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3 DIN EN 61326-1
Vibration: (DIN EN 60068-2-6)	300 m/s^2 (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	5000 m/s^2 (6 ms)
Electrial Safety:	according DIN VDE 0160
Turn on time:	<1,5 s


Duty information

Customs tariff number:	90318020
Country of origin:	Germany


Interface

Interface:	SSI
Clock input:	via opto-coupler; I > 1.6 mA; U > 2.2 V
Clock frequency:	100 kHz up to 500 kHz, up to 2 MHz on request
Data output:	RS485/RS422 compatible
Output code:	gray or binary
SSI output:	Angular-/position value
Parity bit:	optional (even/odd)
Error bit:	optional
Turn on time:	<1,5 s
Configuration inputs Positive direction of counting: (View on shaft)	DIR = GND -> cw DIR = +UB -> ccw
Set to zero:	Set: Preset = +UB for 2 s Deaktivate: Preset = GND

Transmission protocoll SSI Single transmission:

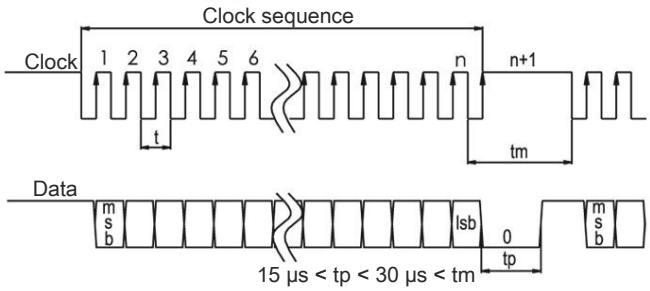

Transmission protocol SSI Multipath transmission:

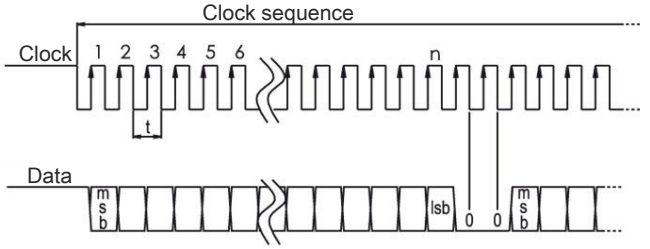

Caractéristiques techniques


Encoder EM-M 058 SR SSI

LED-behaviour:	
At Start / while booting:	- red gleam (< 2,3 s)
Malfunction:	- constant red gleam (> 2,3 s)
Normal function:	- constant green gleam
No supply:	- no gleam

General Data

Weight	approx. 200 g [7.055 oz]
Connections	connector outlet
Protection rating (EN 60529)	IP67+IP69K all around
Operating temperature	-40 °C up to +85 °C [-40 °F up to +185 °F]
Storage temperature	-40 °C up to +100 °C [-40 °F up to +212 °F]

Connector, M12x1 M12A08S, axial, 8-pin

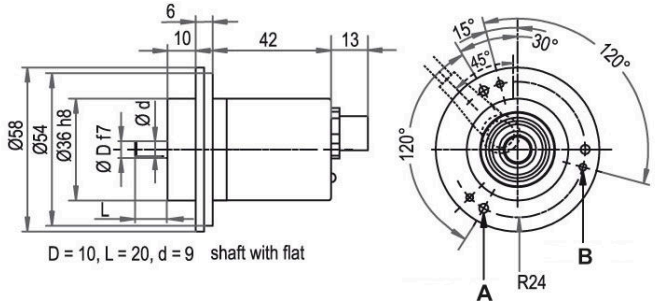

A M4x0.7 - 6H
B M3x0.5 - 6H


All dimensions in mm

CB8 → M12A08S

Description

M12A08S axial, 8-pin, shield connected to encoder housing


Assignments

	M12A08S
	
GND	1
(+) Vcc	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	housing

Caractéristiques techniques

Encoder EM-M 058 SR SSI

Connector, M12x1 M12R08S, radial, 8-pin

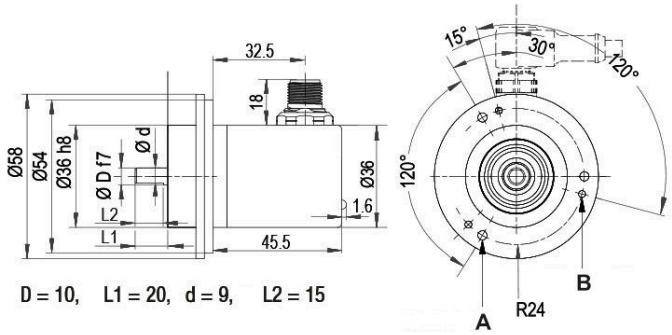

A M4x0.7 - 6H
B M3x0.5 - 6H


All dimensions in mm

CC8 → M12R08S

Description

M12R08S	radial, 8-pin, shield connected to encoder housing

Assignments

	M12R08S
	
GND	1
(+) Vcc	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	housing

Caractéristiques techniques

Leuze

Encoder EM-M 058 SR SSI

Example Order No.	Type	Your encoder
EM50 058 SR	EM-M 058 SR	EM50 058 SR

	Shaft	Order key
10	Ø 10 mm [Ø 0.394"]	10

	Single-turn Resolution	Order key
12	Single-turn resolution 1 bit up to 16 bit, recommended min. 6 bit (e. G. 12 bit)	12

	Multi-turn Resolution	Order key
12	Multi-turn up to 43 bit (e. G. 12 bit) No Multi-turn = 00	12

	Data protocol	Order key
06	SSI binary	06
	SSI gray 07	

	Power supply	Order key
0	4.75 V up to 32 V (standard)	0
	4.75 V up to 5.5 V	1

	Galvanic isolation	Order key
1	yes	1

	Electrical connections	Order key
	Connector:	
M12A08S	sensor-connector, M12x1, 8-pin, axial, shield connected to encoder housing	M12A08S
	sensor-connector, M12x1, 8-pin, radial, shield connected to encoder housing	M12R08S

Code d'article

Désignation d'article : **EABB CCCDDEE FFFFFF GHHJKK LLMNNOPPP RR**

A	**Type de codeur rotatif** I : Incrémental S : Absolu, mono-tour M : Absolu, multi-tour
BB	**Série** 10 : Entry 30 : Basic 50 : Extended 70 : Advanced
CCC	**Diamètre de bride** 024 : 24 mm 036 : 36 mm 058 : 58 mm 063 : 63 mm 067 : 67 mm 070 : 70 mm 080 : 80 mm 100 : 100 mm 115 : 115 mm
DD	**Type de bride** BB : Arbre creux avec alésage Sackloch CC : Bride de serrage (forme compacte) CF : Bride de serrage (aliments et boissons) CH : Bride de serrage (exécution pour charges lourdes) CL : Bride de serrage HI : Arbre creux (isolé) HO : Arbre creux HT : Arbre creux (supports de couple spéciaux) RC : Bride ronde (bride de serrage 36/40, 58 avec arbre de 6 mm) RE : Bride ronde (alésages étendus) RN : Bride ronde SC : Accouplement statorique SF : Bride à vis (bride de serrage 53, 58 Aliments et boissons) SI : Bride synchro (charge sur l'arbre étendue et protection IP) SQ : Bride carrée SR : Bride à vise (bride de serrage 36/40, 58 résistante à la corrosion) SY : Synchro (incrémental), Servo (36), Synchro (58) (absolu) TM : Tacho (115 avec arbre de 1 mm, rétroaction moteur 58) TS : Tacho (arbre de 10 mm)
EE	**Diamètre arbre/alésage** 06 : 6 mm 07 : 7 mm 08 : 8 mm 08 : 8 mm 10 : 10 mm 11 : 11 mm 12 : 12 mm 14 : 14 mm 15: 15 mm 06-72 : Alésage creux/Sackloch (6 ... 72 mm)
FFFFFF	**Signal/résolution** Axxxxx : A Bxxxxx : AB Nxxxxx : ABN P16384 : programmable xx : Mono-tour, 1 ... 16 bit xx : Multi-tour, 0 ... 43 bit (00 pour mono-tour)
G	**Isolation galvanique (absolu uniquement)** 0 : sans 1 : avec
HH	**Alimentation en tension (absolu uniquement)** 0 : 10 ... 32 V CC/avec isolation galvanique 1 : 4,75 ... 5,5 V CC 2 : 18 ... 30 V CC
J	**Principe de fonctionnement** M : magnétique O : Optique P : optiquement interpolé

Code d'article

KK	**Interface** 01 : RS485 06 : SSI binaire 07 : SSI Gray 08: Ethernet universel 35 : CANopen 38 : EtherCAT 42 : IO-Link 48 : PROFINET 58 : EtherNET/IP 68 : CANopen lift 78 : CAN SAE J1939
LL	**Raccordement électrique** M08 : Connecteur rond M8 M12 : Connecteur rond M12 M16 : Connecteur rond M16 M23 : Connecteur rond M23 M12BC : Connecteur boîtier réseau
M	**Sortie de câble** A : Axial R : Radial T : Tangentiel
NN	**Nombre de pôles** xx : Nombre de pôles
O	**Connexion blindage (câble 2 m) (en option)** C : raccordé N : non raccordé
PPP	**Longueur de câble** xxx : Longueur de câble (en dm)

Remarque

↳ Vous trouverez une liste de tous les types d'appareil disponibles sur le site Internet de Leuze à l'adresse www.leuze.com.

Leuze