기술 데이터 시트
엔코더 시리즈 정보
품목 번호: 91000220
EM-M 058 SR SSI



그림과 차이가 날 수 있습니다

내용

- 기술 데이터
- 제품 키워드

시리즈	EM-M 058 SR
기본 원리	절대형
작동 원리	자기식
플랜지 직경	Ø 58mm
플랜지 유형	클램핑 플랜지
실축/중공축	실축
축 직경	Ø 10mm
공급전압	4.75 ~ 32V DC
출력 회로	M12A08S
	M12R08S
펄스 수	1 ... 16 Bit / 0 ... 43 Bit

기술 데이터

Encoder EM-M 058 SR SSI

Mechanical Data

Flange	clamping flange
Flange material	Aluminum, anodized natur
Housing material	steel case chrome-plated, magnetic shielding
Flange diameter	Ø 58 mm [Ø 2.283"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature
Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 18 mm [0.709"]
Max. Permissible shaft loading radial	100 N [10.197 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10'9 revs. at 100 % rated shaft load 1 x 10'10 revs. at 40 % rated shaft load 1 x 10'11 revs. at 20 % rated shaft load
Max. operating speed	3600 rpm

Machinery Directive: basic data safety integrity level

$MTTF_d$	1000 a
Mission time (TM)	20 a
Nominale service life (L10h)	1 x 10'11 revs. at 20 % rated shaft load and 3600 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 32 VDC: typ. 50 mA
Power consumption	max. 0.5 W
Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 80 mA
Power consumption	max. 0.44 W
Operating principle	magnetic

Sensor data

Single-turn technology	innovative hall sensor technology
Single-turn resolution	up to 65,536 steps/360° (16 bit)
Single-turn accuracy	± 0.0878° (≤ 12 bit)
Single-turn repeat accuracy	± 0.0878° (≤ 12 bit)
Internal cycle time	≤ 600 µs
Multi-turn technology	Wiegand wire technology no battery and no gear.
Multi-turn resolution	up to 43 bit.

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
Includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3 DIN EN 61326-1
Vibration: (DIN EN 60068-2-6)	300 m/s^2 (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	5000 m/s^2 (6 ms)
Electrial Safety:	according DIN VDE 0160
Turn on time:	<1,5 s


Duty information

Customs tariff number:	90318020
Country of origin:	Germany


Interface

Interface:	SSI
Clock input:	via opto-coupler; I > 1.6 mA; U > 2.2 V
Clock frequency:	100 kHz up to 500 kHz, up to 2 MHz on request
Data output:	RS485/RS422 compatible
Output code:	gray or binary
SSI output:	Angular-/position value
Parity bit:	optional (even/odd)
Error bit:	optional
Turn on time:	<1,5 s
Configuration inputs Positive direction of counting: (View on shaft)	DIR = GND -> cw DIR = +UB -> ccw
Set to zero:	Set: Preset = +UB for 2 s Deaktivate: Preset = GND

Transmission protocoll SSI Single transmission:

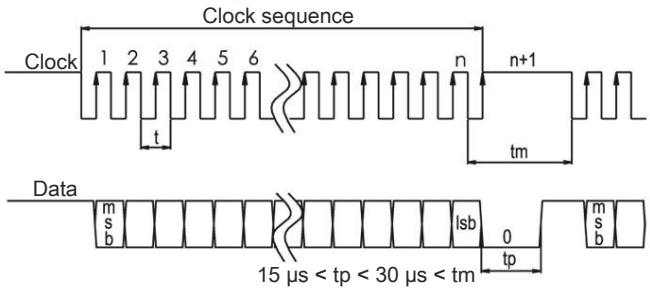

Transmission protocol SSI Multipath transmission:

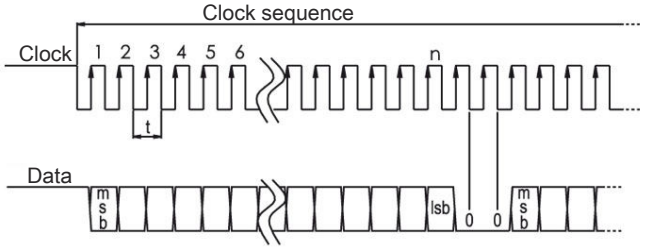

기술 데이터


Encoder EM-M 058 SR SSI

LED-behaviour:	
At Start / while booting:	- red gleam (< 2,3 s)
Malfunction:	- constant red gleam (> 2,3 s)
Normal function:	- constant green gleam
No supply:	- no gleam

General Data

Weight	approx. 200 g [7.055 oz]
Connections	connector outlet
Protection rating (EN 60529)	IP67+IP69K all around
Operating temperature	-40 °C up to +85 °C [-40 °F up to +185 °F]
Storage temperature	-40 °C up to +100 °C [-40 °F up to +212 °F]

Connector, M12x1 M12A08S, axial, 8-pin

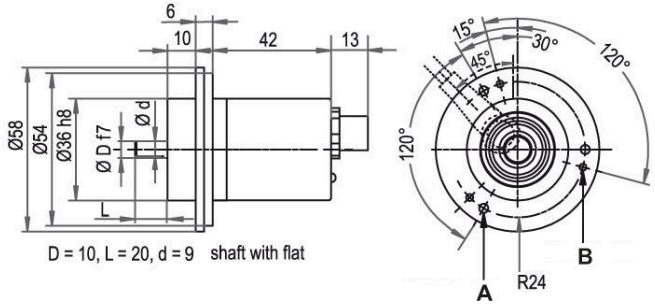

A M4x0.7 - 6H
B M3x0.5 - 6H


All dimensions in mm

CB8 → M12A08S

Description

M12A08S axial, 8-pin, shield connected to encoder housing


Assignments

	M12A08S
	
GND	1
(+) Vcc	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	housing

기술 데이터

Encoder EM-M 058 SR SSI

Connector, M12x1 M12R08S, radial, 8-pin

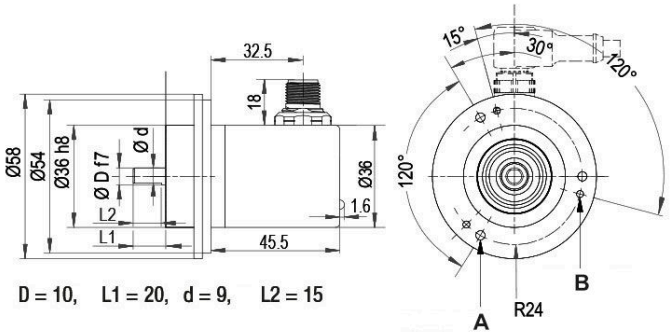

A M4x0.7 - 6H
B M3x0.5 - 6H


All dimensions in mm

CC8 → M12R08S

Description

M12R08S	radial, 8-pin, shield connected to encoder housing

Assignments

	M12R08S
	
GND	1
(+) Vcc	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	housing

기술 데이터

Encoder EM-M 058 SR SSI

Example Order No.	Type	Your encoder
EM50 058 SR	EM-M 058 SR	EM50 058 SR

	Shaft	Order key
10	Ø 10 mm [Ø 0.394"]	10

	Single-turn Resolution	Order key
12	Single-turn resolution 1 bit up to 16 bit, recommended min. 6 bit (e. G. 12 bit)	12

	Multi-turn Resolution	Order key
12	Multi-turn up to 43 bit (e. G. 12 bit) No Multi-turn = 00	12

	Data protocol	Order key
06	SSI binary	06
	SSI gray 07	

	Power supply	Order key
0	4.75 V up to 32 V (standard)	0
	4.75 V up to 5.5 V	1

	Galvanic isolation	Order key
1	yes	1

	Electrical connections	Order key
	Connector:	
M12A08S	sensor-connector, M12x1, 8-pin, axial, shield connected to encoder housing	M12A08S
	sensor-connector, M12x1, 8-pin, radial, shield connected to encoder housing	M12R08S

제품 키워드

제품 명칭: **EABB CCCDDEE FFFFFF GHHJKK LLMNNOPPP RR**

A	**회전 센서 유형** I: 증분형 S: 절대형, 싱글턴 M: 절대형, 멀티턴
BB	**시리즈** 10: Entry 30: 기본 50: 확장형 70: Advanced
CCC	**플랜지 직경** 024: 24mm 036: 36mm 058: 58mm 063: 63mm 067: 67mm 070: 70mm 080: 80mm 100: 100 mm 115: 115 mm
DD	**플랜지 유형** BB: 막힌 구멍 보어가 있는 중공축 CC: 클램핑 플랜지(컴팩트형) CF: 클램핑 플랜지(식품 및 음료용) CH: 클램핑 플랜지(중하중형) CL: 클램핑 플랜지 HI: 중공축(절연) HO: 중공축 HT: 중공축(특수 토크 지지대) RC: 원형 플랜지(36/40 클램핑 플랜지, 58은 6 mm 축 적용) RE: 원형 플랜지(확장 홀) RN: 원형 플랜지 SC: 스테이터 커플링 SF: 나사식 플랜지(53 클램핑 플랜지, 58 식품 및 음료용) SI: 서보 플랜지(증가된 축 하중 및 IP 보호) SQ: 스퀘어 플랜지 SR: 나사식 플랜지(36/40 클램핑 플랜지, 58 내식형) SY: 싱크로(증분형), 서보(36), 싱크로(58)(절대형) TM: 타코(115, 1mm 축, 58 모터 피드백) TS: 타코(10mm 축)
EE	**축/보어 직경** 06: 6mm 07: 7mm 08: 8mm 08: 8mm 10: 10mm 11: 11mm 12: 12mm 14: 14mm 15: 15 mm 06-72: 중공축/막힌 구멍 보어(6 ~ 72mm)
FFFFFF	**신호/분해능** Axxxxx: A Bxxxxx: AB Nxxxxx: ABN P16384: 프로그래밍 가능 xx: 싱글턴, 1 ~ 16비트 xx: 멀티턴, 0 ~ 43비트(싱글턴의 경우 00)
G	**갈바닉 절연(절대형에 한함)** 0: 제외 1: 있음
HH	**전원 공급(절대형에 한함)** 0: 10 ~ 32V DC/갈바닉 절연 1: 4.75 ~ 5.5V DC 2: 18 ~ 30V DC
J	**작동 원리** M: 자기식 O: 광학 방식 P: 광학 보간

제품 키워드

KK	**인터페이스** 01: RS485 06: SSI 2진 07: SSI Gray 08: 범용 이더넷 35: CANopen 38: EtherCAT 42: IO-Link 48: PROFINET 58: EtherNet/IP 68: CANopen lift 78: CAN SAE J1939
LL	**전기 연결** M08: 원형 커넥터 M8 M12: 원형 커넥터 M12 M16: 원형 커넥터 M16 M23: 원형 커넥터 M23 M12BC: 버스 커넥터
M	**케이블 출구** A: 액시얼 R: 레이디얼 T: 접선형
NN	**핀 개수** xx: 핀 개수
O	**차폐 연결(2m 케이블)(옵션)** C: 연결됨 N: 연결되지 않음
PPP	**케이블 길이** xxx: 케이블 길이(단위: dm)

참고

↳ 제공되는 모든 장치 유형 목록은 로이체의 웹 사이트 www.leuze.com을 참조하십시오.

Leuze