

Teknik veri sayfası Enkoder Serisi Bilgileri

Ürün no.: 90000470

EI30-P 100 HI

İçerik

- Teknik veriler
- Ürün anahtarı



Şekil farklılık gösterebilir

Enkoder_Serisi	EI 100 HI
Enkoder_Temel_Prensip	artımlı
Enkoder_Çalışma_Prensibi	optik interpolasyonlu
Enkoder_Flanş_Çapı	Ø 100 mm
Enkoder_Flanş_Tipi	İzole edilmiş içi boş şaft
Enkoder_Dolu Şaft/İçi Boş Şaft	İçi boş mil
Enkoder_Şaft_Çapı	Ø 25 mm
	Ø 30 mm
	Ø 32 mm
	Ø 38 mm
	Ø 40 mm
	Ø 42 mm
Enkoder_Besleme_Gerilimi	10 ... 30 V DC
	4,75 ... 5,5 V DC
	5 ... 30V DC
Enkoder_Çıkış_Devresi	1 Vss Sin/Cos
	HTL
	HTL, inv.
	TTL
	TTL, RS422 uyumlu, inv.
Enkoder_Darbe_Sayısı	10240 I/U
	16384 I/U
	20480 I/U
	4096 I/U
	8192 I/U

Teknik veriler

Encoder EI30 P 100 HI

Resolution

Pulses per revolution PPR	up to 20480 PPR
---------------------------	-----------------

Mechanical Data

Flange	hollow shaft (through-bored)
Flange material	aluminum
Housing material	aluminum, powder coated
Torque supports	incl. 1 torque support
- 1. Spring plate compensation	axial: ± 0.8 mm [0.0315"], radial: ± 0.2 mm [0.0079"]
Flange diameter	$\varnothing$ 100 mm [$\varnothing$ 3.543"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1.5 Ncm [2.124 in-ozf] at ambient temperature
Fixing	2 x M4, DIN 913; Starting torque: 2,5 Nm

Shaft	$\varnothing$ 25 mm [$\varnothing$ 0.984"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 28 mm [$\varnothing$ 1.102"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 30 mm [$\varnothing$ 1.181"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 32 mm [$\varnothing$ 1.26"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 38 mm [$\varnothing$ 1.496"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 40 mm [$\varnothing$ 1.575"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 42 mm [$\varnothing$ 1.654"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 45 mm [$\varnothing$ 1.772"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Bearings

Bearings type	2 precision ball bearings
Nominale service life	3 x 10 ¹⁰ revs. at 100 % rated shaft load 1 x 10 ¹¹ revs. at 40 % rated shaft load 1 x 10 ¹² revs. at 20 % rated shaft load
Max. operating speed	3500 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹² revs. at 20 % rated shaft load and 3500 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4.75 VDC up to 30 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL $\leq$ 5000 ppr: max. 200 kHz HTL $\leq$ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz

Teknik veriler

Encoder EI30 P 100 HI

Electrical Data

Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C6 and D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160


Duty information

Customs tariff number:	90318020
Country of origin:	Germany

General Data

Weight	approx. 720 g [25.397 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	IP54
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-30 °C up to +80 °C [-22 °F up to 176 °F]

Cable connection R-N, R-C radial with 2 m cable

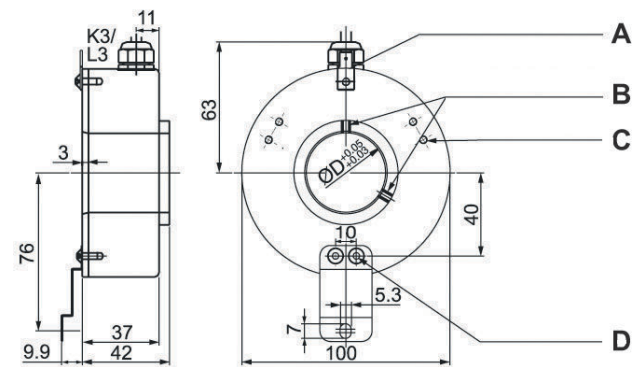

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

N inv. poss.

R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments

	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN


Teknik veriler

Encoder EI30 P 100 HI

Assignments

B	YE	YE	GY
N	GY	GY	BK
	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

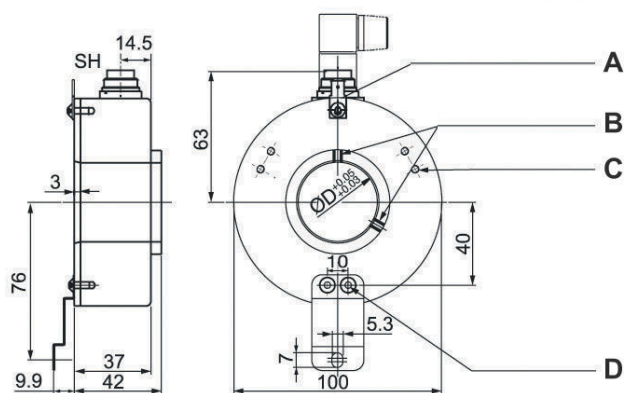

All dimensions in mm

- A Plug-in connector for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

N inv. poss.

R5	radial, 5-pin, Connector connected to encoder housing	–
R6	radial, 6-pin, Connector connected to encoder housing	–
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	R5 5-pin	R6 6-pin	R8 8-pin	R8 8-pin	R12 12-pin	R12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	5	C	C
–	–	–	–	–	–	–
A inv.	–	–	6	6	F	F
B inv.	–	–	7	7	A	A


Teknik veriler

Encoder EI30 P 100 HI

Assignments

N inv.	–	–	8	8	D	D
n. c.	–	5	–	–	G, J	G, J
Shield	–	–	–	–	–	–

Connector (M16x0.75) R7, radial, 7-pin

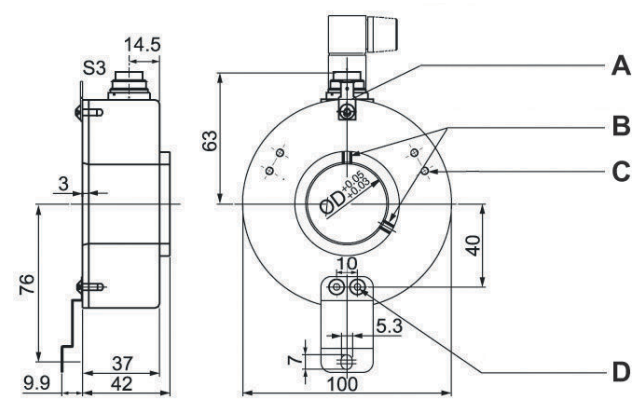

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

R7	radial, 7-pin, Connector connected to encoder housing	N inv. poss.
----	---	--------------


Assignments

R7	
7-pin	
Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
–	–
A inv.	–
B inv.	–
N inv.	–
n. c.	6, 7
Shield	–

Teknik veriler

Encoder EI30 P 100 HI

Connector (M23) R12M, radial, 12-pin

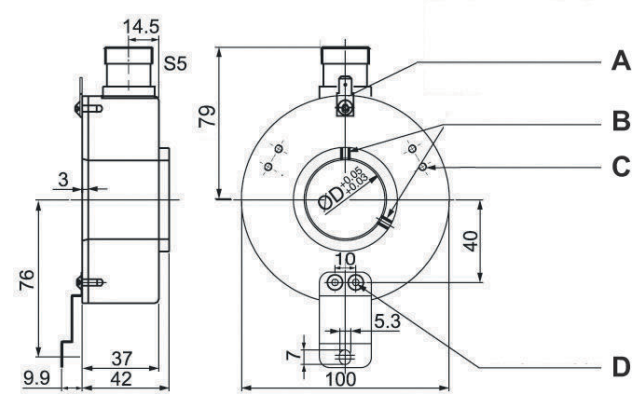

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support


Description	N inv. poss.
R12M radial, 12-pin, Connector connected to encoder housing	•

	R12M	R12M	R12M
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	3
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
Shield	–	–	–

Teknik veriler

Encoder EI30 P 100 HI

Connector (M23) RC12, radial, 12-pin (clockwise)

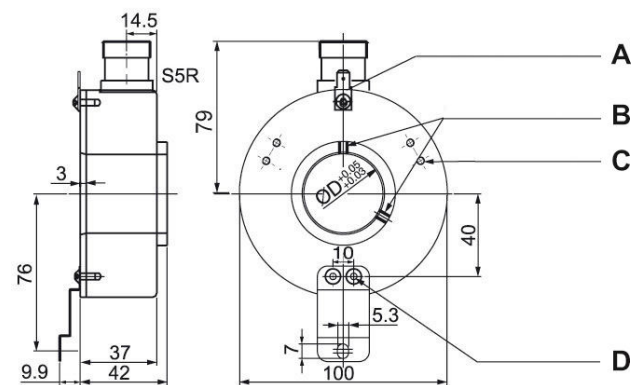

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

N inv. poss.

RC12 radial, 12-pin, Connector connected to encoder housing

Assignments


	RC12 12-pin	RC12 12-pin	RC12 12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	3
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
Shield	–	–	–

Hier waren die falschen Bilder drin: es fehlte unten rechts das R

Teknik veriler

Encoder EI30 P 100 HI

Sensor-connector (M12x1) RS, radial, 4-, 5-, 8-, 12-pin

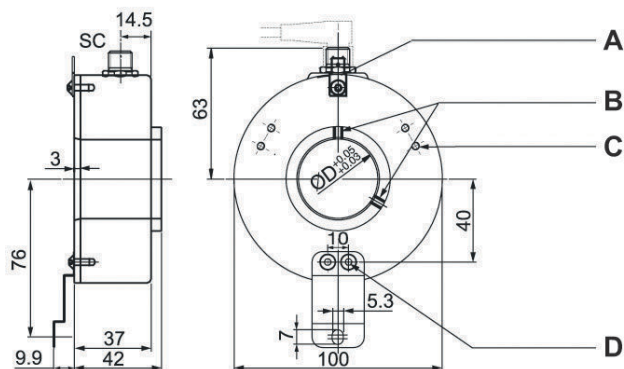

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

N inv. poss.

RS4	radial, 4-pin, Connector connected to encoder housing	—
RS5	radial, 5-pin, Connector connected to encoder housing	—
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS4 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

Teknik veriler

Encoder EI30 P 100 HI

Options

Low temperature	Order key
The encoder EI30 P 100 HI with the output circuit types C4, C6, D4, D6, C3, C5, D3, D5, C1, C2 is also available with the extended temperature range -40 °C up to +85 °C [-40 °F up to +185 °F] (measured at the flange).	LT
Pressure equalising membrane	Order key
The EI30 P 100 HI shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity. The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1. Max. RPM: 1500 rpm Permitted Shaft-Loading, axial: 100 N [10.197 kp] Permitted Shaft-Loading, radial: 120 N [12.236 kp] Max. PPR: 20480 ppr Starting-torque: approx. 5 Ncm [7.081 in-ozf] at ambient temperature	PE
Cable length	Order key
The encoder EI30 P 100 HI can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

Teknik veriler

Encoder EI30 P 100 HI

Example Order No.	Type																																																													
EI30 P 100 HI	EI30 P 100 HI																																																													
EI30 P 100 HI																																																														
Shaft																																																														
25	25; 28; 30; 32; 38; 40; 42; 45																																																													
Pulses per revolution PPR:																																																														
1024	512, 1024, 2048, 2500, 3600, 4096, 4500, 5000, 8192, 10240, 16384, 20480 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request																																																													
Channels:																																																														
N	B, N																																																													
Output circuit																																																														
C6	<table><tr><th>Resolution PPR</th><th>Power supply VDC</th><th>Output circuit</th><th>—</th><th>Order key</th></tr><tr><td rowspan="2">up to 2500</td><td>5 - 30</td><td>HTL (TTL at 5 VDC)</td><td>—</td><td>C7</td></tr><tr><td>5 - 30</td><td>HTL, inv. (TTL/RS422 comp. at 5 VDC)</td><td>—</td><td>D7</td></tr><tr><td rowspan="6">up to 5000</td><td>4.75 - 5.5</td><td>TTL</td><td>—</td><td>C5</td></tr><tr><td>4.75 - 5.5</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>D5</td></tr><tr><td>10 - 30</td><td>HTL</td><td>—</td><td>C6</td></tr><tr><td>10 - 30</td><td>HTL inverted</td><td>—</td><td>D6</td></tr><tr><td>10 - 30</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>C1</td></tr><tr><td>(higher frequency) 1200 up to 25000</td><td>4.75 - 5.5</td><td>TTL</td><td>—</td><td>C3</td></tr><tr><td>4.75 - 5.5</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>D3</td></tr><tr><td>10 - 30</td><td>HTL</td><td>—</td><td>C4</td></tr><tr><td>10 - 30</td><td>HTL inverted</td><td>—</td><td>D4</td></tr><tr><td>10 - 30</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>C2</td></tr><tr><td>1024, 2048</td><td>4.75 - 5.5</td><td>1 Vpp sin/cos</td><td>—</td><td>D8</td></tr></table>	Resolution PPR	Power supply VDC	Output circuit	—	Order key	up to 2500	5 - 30	HTL (TTL at 5 VDC)	—	C7	5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D7	up to 5000	4.75 - 5.5	TTL	—	C5	4.75 - 5.5	TTL, RS422 comp., inverted	—	D5	10 - 30	HTL	—	C6	10 - 30	HTL inverted	—	D6	10 - 30	TTL, RS422 comp., inverted	—	C1	(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	—	C3	4.75 - 5.5	TTL, RS422 comp., inverted	—	D3	10 - 30	HTL	—	C4	10 - 30	HTL inverted	—	D4	10 - 30	TTL, RS422 comp., inverted	—	C2	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	—	D8
	Resolution PPR	Power supply VDC	Output circuit	—	Order key																																																									
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	—	C7																																																									
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D7																																																									
	up to 5000	4.75 - 5.5	TTL	—	C5																																																									
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D5																																																									
		10 - 30	HTL	—	C6																																																									
		10 - 30	HTL inverted	—	D6																																																									
		10 - 30	TTL, RS422 comp., inverted	—	C1																																																									
		(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	—	C3																																																								
	4.75 - 5.5	TTL, RS422 comp., inverted	—	D3																																																										
	10 - 30	HTL	—	C4																																																										
	10 - 30	HTL inverted	—	D4																																																										
	10 - 30	TTL, RS422 comp., inverted	—	C2																																																										
1024, 2048	4.75 - 5.5	1 Vpp sin/cos	—	D8																																																										

Teknik veriler

Encoder EI30 P 100 HI

Electrical connections

Description		N inv. poss.	Order key
Cable: length (2 m standard)			
R-N	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, radial	–	RS4
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, radial	•	RS12

Options

Description		Order key
Low temperature		LT
IP55		PE
Without option		Empty
Cable length		XXX = Decimeter

Example Order No.:	EI30 P 100 HI	25	1024	N	C6	R-N	EI30 P 100 HI	Your encoder
--------------------	---------------	----	------	---	----	-----	---------------	--------------

Ürün anahtarı

Parça atama: EABB CCCDDEE FFFFFFF GHJJKK LLMNOPPP RR

A	Enkoder tipi I: Artımlı S: Mutlak, tek turlu M: Mutlak, çok turlu
BB	Seri 10: Giriş 30: Temel 50: Uzatılmış 70: Gelişmiş
CCC	Flanş çapı 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	Flanş tipi BB: Kör delikli içi boş şaft CC: Sıkıştırma flanşı (kompakt tasarım) CF: Sıkıştırma flanşı (gıda ve içecek) CH: Sıkıştırma flanşı (ağır hizmet tipi) CL: Sıkıştırma flanşı HI: İçi boş şaft (izole edilmiş) HO: İçi boş şaft HT: İçi boş şaft (özel tork desteği) RC: Yuvarlak flanş (36/40 sıkıştırma flanşı, 58 – 6 mm şaftlı) RE: Yuvarlak flanş (genişletilmiş delikler) RN: Yuvarlak flanş SC: Stator soketi SF: Vidalı flanş (53 sıkırtırmalı flanş, 58 Gıda ve içecek) SI: Servo flanşı (artırılmış mil yükü ve IP koruma sınıfı) SQ: Kare flanş SR: Vidalı flanş (36/40 sıkırtırmalı flanş, 58 korozyona dayanıklı) SY: Senkron (artımlı), Servo (36), Senkron (58) (mutlak) TM: Hızölçer (115, 1 mm şaftlı, 58 motor geri beslemeli) TS: Hızölçer (10 mm şaft)
EE	Şaft/Delik Çapı 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: Delik/kör delik delme (6 ... 72 mm)
FFFFFF	Sinyal/Çözünürlük Axxxx: A Bxxxx: AB Nxxxx: ABN P16384: Programlanabilir xx: Tek turlu, 1 ... 16 Bit xx: Çok turlu, 0 ... 43 Bit (Tek turluda 00)
G	Galvanik izolasyon (yalnızca mutlak) 0: Yok 1: Birlikte
HH	Gerilim beslemesi (yalnızca mutlak) 0: 10 ... 32 V DC/galvanik izolasyonlu 1: 4,75 ... 5,5 V DC 2: 18 ... 30 V DC
J	Çalışma prensibi M: Manyetik O: Optik P: Optik interpolasyonlu

Ürün anahtarı

KK	Arayüz 01: RS485 07: SSI ikili 08: SSI Gri 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNET/IP
LL	Elektrik bağlantısı M08: Yuvarlak konektör M8 M12: Yuvarlak konektör M12 M16: Yuvarlak konektör M16 M23: Yuvarlak konektör M23 M12BC: Motor kaputu konektörü
M	Kablo çıkışı A: Eksenel R: Radyal T: Teğetsel
NN	Kutup sayısı xx: Kutup sayısı
O	Ekran bağlantısı (2 m kablo) (isteğe bağlı) C: Bağlı N: Bağlı değil
PPP	Kablo uzunluğu xxx: Kablo uzunluğu (in dm)

Uyarı



→ Mevcut tüm cihaz modellerine sahip bir listeyi, www.leuze.com Leuze internet sitesinde bulabilirsiniz.

